

Flood Series

23" Area/Flood



FL90

Housing:

Die Cast Aluminum Housing & Hinged Top Frame, Safety Cable Restraint, 1/2" Coin Plugs with O-rings for Conduit & Photocell, Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating

Reflector:

Aluminum Reflector

Lens:

Tempered Flat Clear Glass Lens

Socket:

Porcelain 5KV Pulse Rated Mogul Base with Nickel Plated Screw Shell

Mounting:

Mount with Two-Piece Swivel Bracket, Adjustable Slipfitter, 6" Extruded Mounting Arm, Yoke, or Direct Pole Mount Arm

Wattage:

High Pressure Sodium: 400 to 1000w

Metal Halide: 400 to 1000w

Pulse Start: 1000w

Listings & Ratings:

CSA: Listed for Wet Locations


Access Fixtures

| Kit(s) | | | | |
|---------------------------------|--|---------|------|---------|
| Catalog # | Description | | | |
| FL90 | 23" Flood with Half-Open Frame, Aluminum Reflector | | | |
| Complete Units (Lamps Included) | | | | |
| Catalog # | Wattage | Voltage | Lamp | Ballast |
| FL90H400QL** | 400 | Quad | HPS | CWA |
| FL90H1000QL** | 1000 | Quad | HPS | CWA |
| FL90H1000480L** | 1000 | 480 | HPS | CWA |
| FL90M400QL** | 400 | Quad | MH | CWA |
| FL90M1000QL** | 1000 | Quad | MH | CWA |
| FL90P1000QL** | 1000 | Quad | PS | CWA |

**Specify Mounting: BR=Bracket Mount, SF=Slipfitter Mount

Add: PC1 120V Photocell (Field Installed)
PC2 208-277V Photocell (Field Installed)
Other Wattages & Custom Colors Available Upon Request.

Dimensions

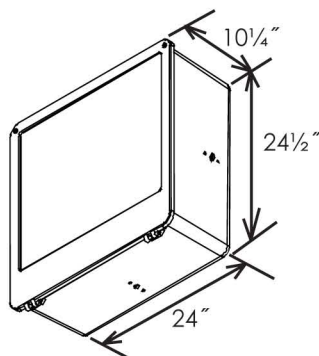

FL90

Access Fixtures
40 Jackson Street
Worcester, MA 01608
888-521-2582
sales@accessfixtures.com
www.AccessFixtures.com


Access Fixtures

| Catalog # | Description |
|-----------|--|
| FL90BF | Baffle, Aluminum with Black Powdercoat Finish |
| FL90GS | Glare Shield, Aluminum, Bronze Powdercoat Finish (Can be reverse mounted as a back cutoff.) |
| FL90LG | Clear Polycarbonate Vandal Resistant Guard |
| FL90WG | Wire Guard, Stainless Steel Construction |
| FL90BR | Two-Piece Swivel Bracket, Stamped, Bronze Finish |
| FL90SFX | External Mount Slipfitter, Die Cast, Hardware & Angle Indicator Coin Plug |
| FLAM | Heavy Duty Adjustable Direct Mount Pole Arm, Bronze Finish, Angle Indicators & Hardware |
| FLEM6* | 6" Aluminum Extruded Mounting Arm, Bronze, Gasket & Hardware |
| FL90Y | Yoke, Stamped Heavy Duty Steel, Textured Bronze Finish |
| CPSC | 3' Steel Cable with Clear Vinyl Coating, Steel Eye & Loop Ends |

*Specify Mounting: Straight Arms: S=Square Pole, R=Round Pole

Flood Series


23" Area/Flood



FL90BF
(Shown Mounted)



FL90GS
(Shown Mounted)



FL90LG



FL90WG
(Shown Mounted)



FL90BR



FL90SFX
(Shown Mounted)



FLAM



FLEM6




FL90Y



CPSC

Photometrics

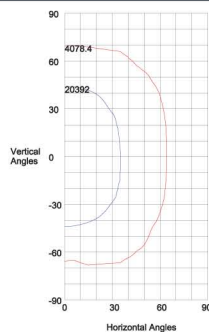

Maximum Candela = 40784
 Located At Horizontal Angle = 5, Vertical Angle = -15
 50% Maximum Candela = 20392
 10% Maximum Candela = 4078.4

FL90M1000

Access Fixtures
 40 Jackson Street
 Worcester, MA 01608
 888-521-2582
sales@accessfixtures.com
www.AccessFixtures.com