

## Wall Pack Series

### Crescent Wall Sconce Up/Down Light



**WP36**

**Housing:**

Die Cast Housing, Textured White, Bronze, or Black Powdercoat Finish Over a Chromate Conversion Coating

**Reflector:**

Aluminum Reflector

**Lens:**

Flat Tempered Glass Lens for Down Light, Molded Oval Shape Glass Lens for Up Light

**Socket:**

HID: Porcelain 4KV Pulse Rated Mogul Base Socket with Nickel Plated Screw Shell

PL: Plug-In Type, GX24Q-4

**Mounting:**

Mount over a 4" Recessed Outlet Box Includes Easy-Hang "Two Hands Free" Wall Mounting Bracket

**Wattage:**

High Pressure Sodium: 35 to 150w

Metal Halide: 50 to 175w

Pulse Start: 175w

Compact Fluorescent: 2 x 26 to 42w

**Listings & Ratings:**

CSA: Listed for Wet Locations


# Access Fixtures

Kit(s)				
Catalog #	Description			
WP36*	Crescent Wall Sconce, Up/Down Light, HID Kit			
WP36F*	Crescent Wall Sconce, Up/Down Light, Fluorescent Kit			
Complete Units (Lamps Included)				
Catalog #	Wattage	Voltage	Lamp	Ballast
WP36H35R120L*	35	120	HPS	R-NPF
WP36H50R120L*	50	120	HPS	R-NPF
WP36H70R120L*	70	120	HPS	R-NPF
WP36H100R120L*	100	120	HPS	R-NPF
WP36H150R120L*	150	120	HPS	R-NPF
WP36H70QL*	70	Quad	HPS	HX-HPF
WP36H100QL*	100	Quad	HPS	HX-HPF
WP36H150QL*	150	Quad	HPS	HX-HPF
WP36M50DL*	50	120/277	MH	HX-HPF
WP36M70QL*	70	Quad	MH	HX-HPF
WP36M100QL*	100	Quad	MH	HX-HPF
WP36M150QL*	150	Quad	MH	HX-HPF
WP36M175QL*	175	Quad	MH	CWA
WP36P175QL*	175	Quad	PS	CWA
WP36F52EL*	2 x 26	120-277	PL	Electronic
WP36F64EL*	2 x 32	120-277	PL	Electronic
WP36F84EL*	2 x 42	120-277	PL	Electronic

\*Specify Color: BZ=Bronze, WH=White, BK=Black

Other Wattages & Custom Colors Available Upon Request.

### Dimensions

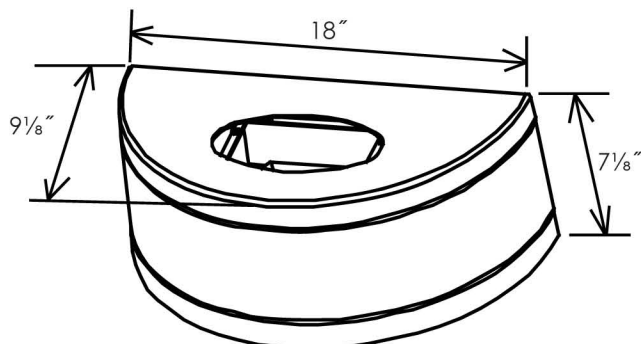


**WP36**

Access Fixtures  
40 Jackson Street  
Worcester, MA 01608  
888-521-2582  
sales@accessfixtures.com  
www.AccessFixtures.com


# Access Fixtures

Wall Pack Series

Crescent Wall Sconce  
Up/Down Light




## Photometrics

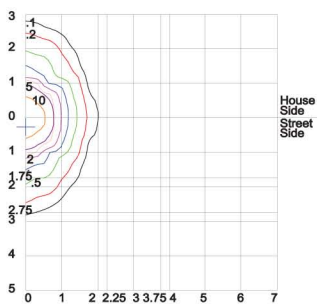

Distance In Units Of Mounting Height  
Values Based On 10 Foot Mounting Height  
1/2 Maximum Candela Trace Shown As Dashed Curve  
(\*) = Maximum Candela Point

**WP36MH175**

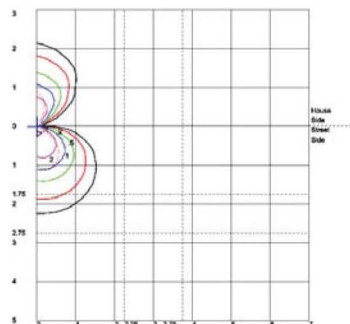

Distance In Units Of Mounting Height  
Values Based On 10 Foot Mounting Height  
1/2 Maximum Candela Trace Shown As Dashed Curve  
(\*) = Maximum Candela Point

**WP36F84EL**

Access Fixtures  
40 Jackson Street  
Worcester, MA 01608  
888-521-2582  
sales@accessfixtures.com  
www.AccessFixtures.com

Option availability is subject to change without notice.