


APTA-C 240 Surface Mount Light, 120-277v, Extreme Life

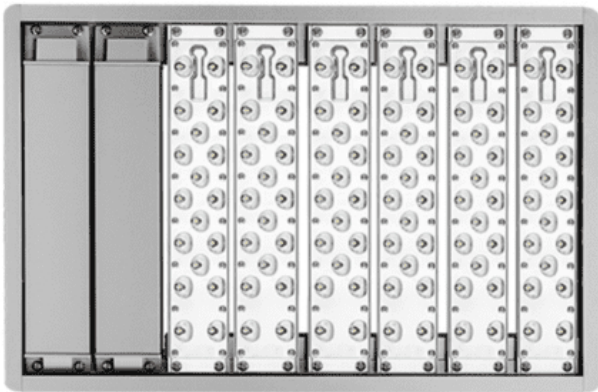

SKU: AF72XFLB240DBSCTHC

Product Page:

<https://www.accessfixtures.com/p/234w-led-warehouse-lights-120-277/>

Product Description

APTA-C 240 Surface Mount Light, 120-277v, Extreme Life is a surface mount fixture for commercial and industrial use.

Surface Mount: This fixture is available with a surface mount for canopy lighting or high bay lighting applications.

Choice of Optics and Kelvin: APTA-C is available in fourteen different choices of optics and five different Kelvins.

IP67 and Extreme Life: This fixture is sealed completely and IP67 rated as well as boasting a 200,000 hour L70 life.

APTA-C 240 Surface Mount Light, 120-277v, Extreme Life Features:
- Die-cast aluminum housing - 120-277v - 130 lumens per watt - IP67/UL/ CUL/ DLC/ LM79/ CB/ CE/ SAA/ RoHS / IK10 - Controls-ready - L70 @ 200,000 hours - Surface mount - 5 year warranty

APTA-C 240 Surface Mount Light, 120-277v, Extreme Life Options:
- Black, White, Bronze, or Gray - Fourteen options for optics and light distribution - Choice of CRI - Choice of Kelvin - 0-10v dimming - Vandal resistant screws - Surge protection - Photocell - Marine grade finish

Access Fixtures Warranty

Access Fixtures is proud to assemble high quality, long lasting lighting products which are covered by a 5-year warranty. In accordance with our warranty policy, we will offer repair, replacement, or refund for qualifying claims. Please contact our friendly customer service team, located in Worcester, MA, to address any questions or concerns you may have. We can be reached at 800-468-9925 Monday-Friday 9-5 EST or via email at sales@accessfixtures.com. Click here to view Access Fixtures' [complete warranty policy](#). **Need a Photometric Analysis for Your Project?**

A photometric analysis is a computer simulation of a particular project. Whether using these fixtures to illuminate a parking lot, athletic field, rail yard, dock, or something else entirely, a photometric analysis is an easy way to quantify your light levels before making a big purchase. This service will provide average footcandles, max/min (uniformity) ratios, minimum footcandles, light trespass levels, and more. When the report(s) are generated, a lighting specialist will walk you through them, page by page, so you know exactly what you will be receiving. Call us at 800-468-9925 or email customerservice@accessfixtures.com for more information about ordering a photometric analysis for your project.

Ready to Order an APTA-C 240 Surface Mount Light, 120-277v, Extreme Life or Speak to a Lighting Specialist?


If you need some additional information about this fixture, give us a call at 800-468-9925. Of course, you can place your order online, right here, but our team is available to answer any questions that may come up. Does your project require

multiple fixtures? Ask us about quantity discounts. We are here to provide anything you need to purchase fixtures and illuminate your project with confidence.

Product Attributes

- Dimensions: 20.08 × 12.99 × 5.04 in
- Weight: 21.1 lbs
- Availability: Typically ships in 6-8 weeks.
- Light Source: 2200 Kelvin – Very Warm White, 3000 Kelvin LED Light Fixtures, 4000K - Cool White, 5000K - Bright White, 5700K - Cinematography
- Available Finishes: Black, Bronze, Gray, White
- Ballast/Driver: Electronic 50/60 Hz
- Color Rendering Index (CRI): 70+, 80+, 90+
- Housing: Die-cast aluminum housing with corrosion-resistant polyester powder. Finish meets 1,000-hour salt-spray certification per ASTM B117/ISO 9227:2012. Modular LED design with IP67 rating.
- Lens: 15+ optical lenses available for specific distribution patterns
- Listings: IP67, CuL Listed, RoHS, UL Listed
- Mounting: Four-Corner Eye Hooks, Four-Corner Eye Hooks with 10' Suspension Cable, Pendant Rod and Ceiling Plate, Surface Mount, Suspension Hook
- Rated Life: 200,000+ Hours
- Voltage: 120v, 208v, 240v, 277v
- Warranty: 5-Year Limited Warranty
- Light Source Lumens: 29520
- System Watts: 217


Product Gallery

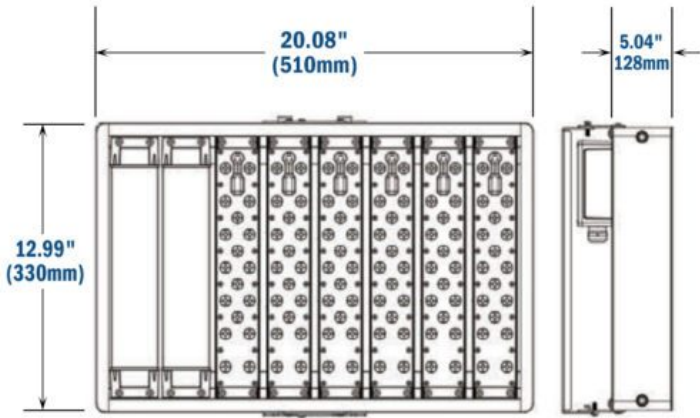







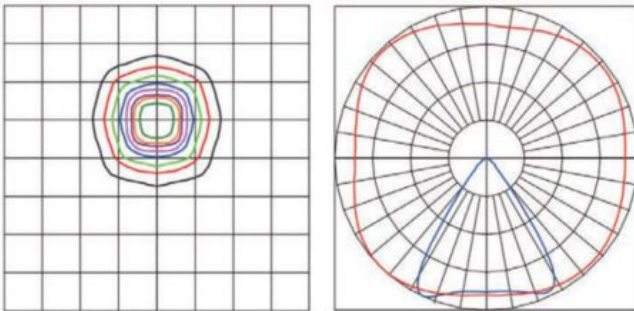

**APTA LEDs feature built-in beam angles.
Shown here are ISO plot and polar curve for a 60° beam angle.**



