


## APTA-V 280 LED Flood Light, 120-277v, Extreme Life

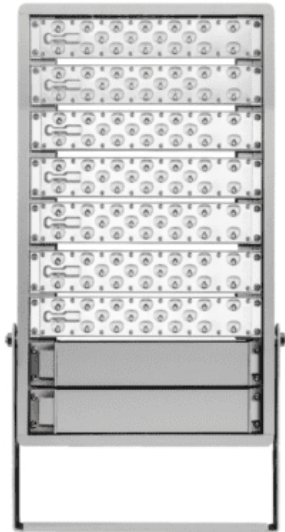

**SKU:** AF72XFLB280CBSCTHC

**Product Page:** <https://www.accessfixtures.com/p/274w-led-flood-120-277v/>

### Product Description

APTA-V 280 LED Flood Light, 120-277v, Extreme Life is a commercial and industrial flood light.

**Vertical Bracket Mount:** APTA-V includes a vertical bracket mount for mounting flexibility in any lighting project.

**Choice of Kelvin and Optics:** APTA-V is available in five Kelvins and fourteen different optics for precision and versatility.

**Extreme Life and IP67:** This fixture is L70 rated at over 200,000 hours and IP67 rated against water and dust.

APTA-V 280 Features:

274w integrated LED

34,200 lumens

- 130 lumens per watt

120-277v

IP67 rated and salt-spray certification

Die-cast aluminum housing

- UL/ CUL/DLC/ LM79/ SAA/ ENEC/ CB/ CE/ ErP/ RoHS/ IK08

L70 life of 200,000+ hours

5 year warranty

APTA-V 280 Options:

Choice of black, bronze, gray, or white

Choice of 2200K, 3000K, 4000K, 5000K or 5700K

Choice of 15 optics variations

Choice of Color Rendering Index (CRI): 70+, 80+, or 90+

- Dimming - Photocell - Baffles - Marine grade finish

Motion sensor

Vandal resistant screws

Bird spikes

- Surge protection

Access Fixtures 5-Year Warranty

All Access Fixtures products come with a 5-year warranty. If your product is found to have a manufacturing defect, we will replace components, the entire product, or issue a refund. We stand behind the quality of our products. Our customer service team, located in Worcester, MA, is happy to address any questions, comments, or concerns you may have. Please give us a call at 800-468-9925. Please view Access Fixtures return policy.

Need a Photometric Analysis for Your APTA-V 280 LED Flood Light, 120-277v, Extreme Life Project?

A photometric analysis creates a computer simulation of a particular project. No

matter what you are lighting, a photometric analysis is an easy way to quantify light levels before purchasing. When a report is generated, a lighting specialist will walk you through it so you know exactly what you will be receiving. Photometrics include average and minimum footcandles, uniformity ratios, spacing, light trespass info, and more. Plus, the cost of the study is refunded back to you when you purchase the fixtures. Call us at 800-468-9925 for more information about ordering a photometric analysis for your project.

Ready to Order APTA-V 280 LED Flood Light, 120-277v, Extreme Life or Speak to a Lighting Specialist?

You can place your order online, [here](#). Or, if you want additional information, give us a call at 800-468-9925. Does your project require multiple fixtures? Ask us about quantity discounts. Our team of friendly expert lighting specialists are available to provide what you need to purchase fixtures and illuminate your project with confidence.

## Product Attributes

- Dimensions: 22.44 &times; 12.99 &times; 4.33 in
- Weight: 24.87 lbs
- Light Source: 2200 Kelvin Light Fixtures, 3000K - Neutral White, 4000K - Cool White, 5000K - Bright White, 5700K - Cinematography
- Availability: Typically ships in 6-8 weeks.
- Available Finishes: Black, Bronze, Gray, White
- Ballast/Driver: Electronic 50/60 Hz
- Color Rendering Index (CRI): 70+, 80+, 90+
- Housing: Die-cast aluminum housing with corrosion-resistant polyester powder. Finish meets 1,000-hour salt-spray certification per ASTM B117/ISO 9227:2012. Modular LED design with IP67 rating.
- Lens: 15+ optical lenses available for specific distribution patterns
- Listings: IP67, CuL Listed, RoHS, UL Listed
- Mounting: Yoke Mount/U-Bracket Mount

- Rated Life: 200,000+ Hours
- Voltage: 120-277v
- Warranty: 5-Year Limited Warranty
- Light Source Lumens: 34200
- System Watts: 253


## Product Gallery



 **AccessFixtures**  
High-Performance Lighting Solutions



 **AccessFixtures**  
High-Performance Lighting Solutions

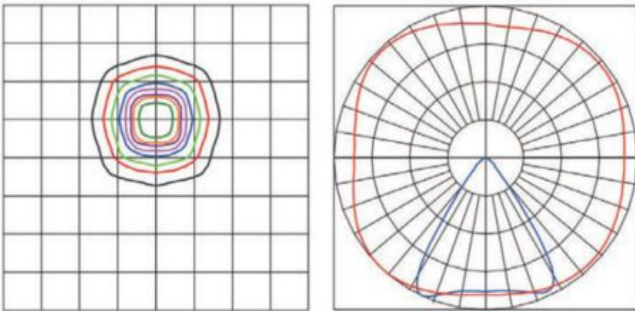

**APTA LEDs feature built-in beam angles.**  
Shown here are ISO plot and polar curve for a 60° beam angle.



