


## APTA-C 280 590nm Amber Surface Mount Light, 120-277v

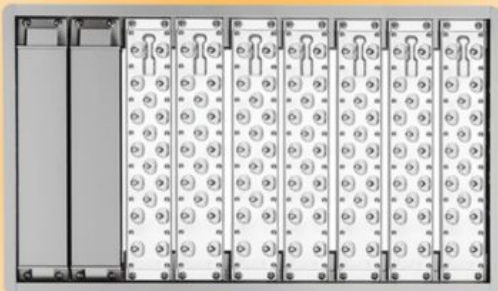

**SKU:** AF72XFLB280DBSTURTLEHC

**Product Page:**

<https://www.accessfixtures.com/p/274w-marine-turtle-canopy-light-apta/>

### Product Description

APTA-C 280 590nm Amber Surface Mount Light, 120-277v is a surface mount fixture for commercial and industrial use.

**590nm Amber:** This fixture is available in 590nm amber which cannot be seen by turtles and other wildlife.

**Choice of Optics:** APTA-C is available with fourteen different choices of optics.

**IP67:** This fixture is sealed completely and IP67 rated against water and dust.

**APTA-C 280 590nm Amber Surface Mount Light, 120-277v Features:**  
- Die-cast aluminum housing - 120-277v - 95 lumens per watt - 50,000 L70

hours - IP67/UL/ CUL/ DLC/ LM79/ CB/ CE/ SAA/ RoHS / IK10 - Controls-ready -  
Surface mount - 5 year warranty APTA-C 280 590nm Amber Surface

### Mount Light, 120-277v Options:

- Black, White, Bronze, or Gray - Fourteen options for optics and light  
distribution - 0-10v dimming - Vandal resistant screws - Surge protection -  
Photocell - Marine grade finish Access Fixtures Warranty

Access Fixtures is proud to assemble high quality, long lasting lighting products which are covered by a 5-year warranty. In accordance with our warranty policy, we will offer repair, replacement, or refund for qualifying claims. Please contact our friendly customer service team, located in Worcester, MA, to address any questions or concerns you may have. We can be reached at 800-468-9925 Monday-Friday 9-5 EST or via email at [sales@accessfixtures.com](mailto:sales@accessfixtures.com). Click [here](#) to view Access Fixtures' [complete warranty policy](#). Need a Photometric Analysis for Your Project?

A photometric analysis is a computer simulation of a particular project. Whether using these fixtures to illuminate a parking lot, athletic field, rail yard, dock, or something else entirely, a photometric analysis is an easy way to quantify your light levels before making a big purchase. This service will provide average footcandles, max/min (uniformity) ratios, minimum footcandles, light trespass levels, and more. When the report(s) are generated, a lighting specialist will walk you through them, page by page, so you know exactly what you will be receiving. Call us at 800-468-9925 or email [customerservice@accessfixtures.com](mailto:customerservice@accessfixtures.com) for more information about ordering a photometric analysis for your project.

Ready to Order an APTA-C 280 590nm Amber Surface Mount Light, 120-277v or Speak to a Lighting Specialist?



If you need some additional information about this fixture, give us a call at 800-468-9925. Of course, you can place your order online, right here, but our team is available to answer any questions that may come up. Does your project require multiple fixtures? Ask us about quantity discounts. We are here to provide anything you need to purchase fixtures and illuminate your project with confidence.

## Product Attributes

- Dimensions: 22.44 &times; 12.99 &times; 5.04 in
- Weight: 22.37 lbs
- Availability: Typically ships in 6-8 weeks.
- Available Finishes: Black, Bronze, Gray, White
- Ballast/Driver: Electronic 50/60 Hz
- Housing: Die-cast aluminum housing with corrosion-resistant polyester powder. Finish meets 1,000-hour salt-spray certification per ASTM B117/ISO 9227:2012. Modular LED design with IP67 rating.
- Lens: 15+ optical lenses available for specific distribution patterns
- Light Source: 590nm Amber
- Listings: IP67, CuL Listed, RoHS, UL Listed
- Mounting: Surface Mount
- Rated Life: 50,000 Hours
- Voltage: 120-277v
- Warranty: 5-Year Limited Warranty
- Light Source Included: LED Array Included
- Light Source Lumens: 15686
- System Watts: 253

## Product Gallery

## APTA 274w Marine Turtle Canopy Light

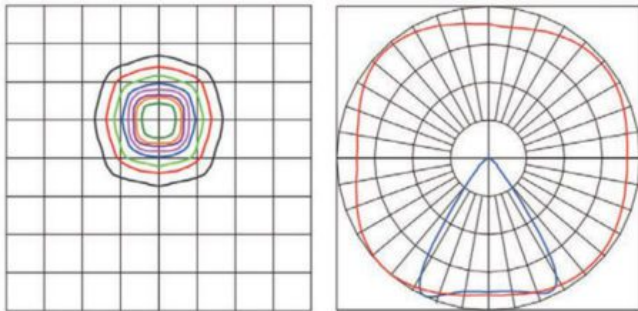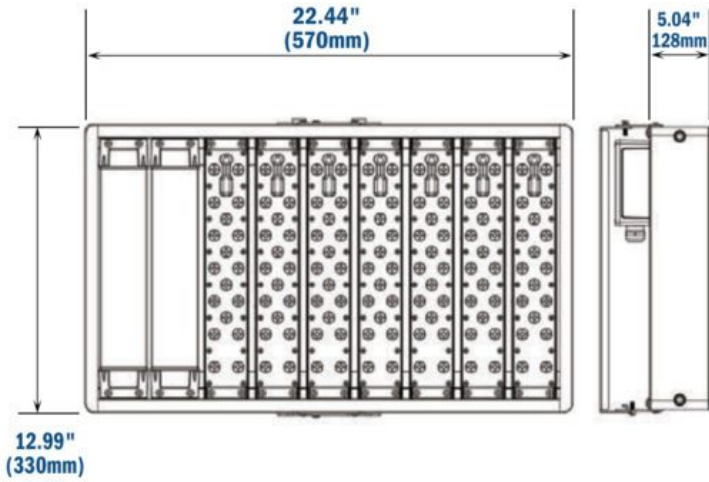

**APTA LEDs feature built-in beam angles.**  
Shown here are ISO plot and polar curve for a 60° beam angle.





**APT A Canopy  
Mount Bracket  
(156w shown)**



**APT Power Supply  
(156w shown)**

