

ARTO 44w Turtle & Wildlife Friendly Garage Lighter 120-277v - EXTREME LIFE

Turtle & Wildlife Friendly




SKU: AF33XVN55QF1X39UAM

Product Tags: [Exterior Lighting](#), [LED](#), [LED Amber](#), [Outdoor Lighting](#), [Turtle-Friendly](#), [Wildlife-Friendly](#)

Product Page: <https://www.accessfixtures.com/p/44w-turtle-led-garage-lighter/>

Product Description

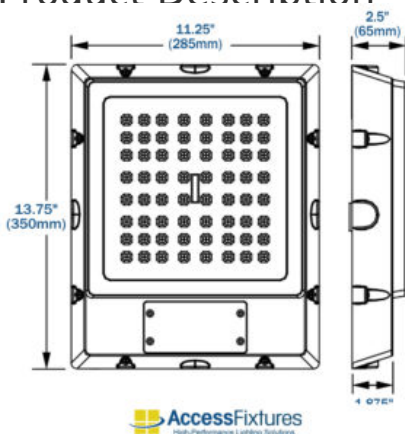

Rugged ARTO 44w garage lighter comes with built-in Easy-Hang bracket to allow one-person installation.

The ARTO 44w turtle LED garage lighter makes an excellent choice for new installations or as a replacement for HID systems in public or private parking garages. It emits 1,877 lumens. The amber LED complies with both [turtle-friendly regulations](#) and security systems requiring monochromatic light]. This luminaire comes with an Easy-Hang bracket to allow for one-person installation. Options include Quick-Mount bracket, microwave motion or photocell sensors, custom RAL colors, and more. Furthermore, this fixture boasts an extreme **219,000 hours (25 years) rated life!**

Click here to see Access Fixtures's complete range of [amber turtle- and wildlife-friendly lighting options](#).

ARTO 44w Garage Lighter LED, Lens, and Performance

The 44w LED array operates at 585-595 nm to comply with both **turtle-friendly regulations and security systems requiring monochromatic amber light**. It emits 1,877 lumens that cast a 1/2 footcandle of light in a circle up to 45 feet in diameter, depending on mounting height—1/2 footcandle is considered satisfactory for garage lighting.

This energy-efficient ARTO 44w turtle LED garage lighter features Type 5 optics and a UV-resistant acrylic lens designed especially for garage lighting applications. Electronic 1-10v dimmable drivers are standard. The sealed LED array's aluminum board to increases the fixture's lifespan and at the same time, decrease lumen depreciation.

For exacting lighting requirements, request a [photometric report for your layout](#).

For details, **call an Access Fixtures lighting specialist at 800-468-9925.**

ARTO 44w Turtle LED Garage Lighter Housing and Mounting



Garage Lighter
(back shown with built-in Easy-Hang bracket)



ARTO 44w turtle LED garage lighter comes standard with Easy-Hang bracket that allows for one-person installation.

Rugged, die-cast aluminum ensures built-to-last reliability. Choose textured architectural bronze or white powder-coat finish over a chromate conversion coating. Custom RAL colors are also available.

The low-profile, slimline housing also contains the fixture's built-in heat sink for thermal management.

The housing accommodates an optional built-in sensor. A clear cover replaces the original color-matched polycarbonate cover when a sensor is elected. Or, if you prefer, use the 1/2" coin plugs with O-rings for a conduit to your external sensor. The ARTO 44w Turtle & Wildlife Friendly Garage Lighter 120-277v - EXTREME LIFE measures **13.75" x 11.25" x 2.5"** and weighs **10 lbs**. The fixture comes with a built-in Easy-Hang mount allowing for one-person installation. The Easy-Hang bracket fits a standard 4" electrical box. Fixture can be mounted from 8-14 feet depending on light level requirements.

Ratings, Listing, Features for ARTO 44w Turtle LED Garage Lighter

ARTO 44w Turtle & Wildlife Friendly Garage Lighter 120-277v - EXTREME LIFE comes with:

Virtually maintenance-free LEDs L70 rated at 219,000 hours—that's 25 years. Longer life equals better performance and less downtime for replacement and repair.

Type V optics - Molded UV-resistant acrylic lens **Electronic, dimmable driver**

IP65-sealed LED compartment

Turtle & Wildlife Friendly

ARTO 44w turtle LED garage lighter operates at 585-595nm for compliance with turtle- and wildlife-friendly regulations.

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750

(damp locations when used with Quick-Mount bracket)

Warranty to operate at temperatures of -40°F to 122°F

Automatic detection of voltages between 120v and 277v Options for ARTO 44w Turtle & Wildlife Friendly Garage Lighter 120-277v - EXTREME LIFE

Options include:

Stamped steel, hinged **Quick-Mount bracket** that fits directly over a recessed electrical box. Note: CSA listed for damp locations when Quick-Mount bracket is used.

Button photocell sensor senses ambient light level for automatic on and off. Choose 120-130v or 208-277v.

Integrated microwave motion sensor with dimming switch turns fixture on when motion is detected (for 15 feet or less mounting height).

Surge protection safeguards fixtures from lightning strikes and other sudden jolts of electricity.

Custom RAL colors

Please contact Access Fixtures for to discuss custom battery backups.

ARTO 44w Turtle LED Garage Lighter Warranty Information

The ARTO 44w Turtle & Wildlife Friendly Garage Lighter 120-277v - EXTREME LIFE luminaire comes with 5-year warranty.


Ready to Order ARTO 44w Turtle & Wildlife Friendly Garage Lighter? Call Us Today!

To discuss custom options and quantity pricing, **call an Access Fixtures lighting specialist at 800-468-9925.**

Product Attributes

- Dimensions: 13.75 × 11.25 × 2.50 in
- Weight: 10 lbs
- Availability: Typically ships in 7-10 business days
- Available Finishes: Bronze, White, Custom RAL
- Ballast/Driver: Electronic 50/60 Hz
- Color Temperature (K): Amber 590nm
- Features: Wildlife Friendly
- Housing: Low-profile, die-cast aluminum housing with 1/2" coin plugs.
- Lens: Molded, UV-resistant acrylic lens
- LED Type: LED Array
- Light Source: Turtle & Wildlife Friendly
- Light Source Included: LED Array Included
- Light Source Lumens: 1877
- Listings: CSA - listed for wet Locations, IP65
- Mounting: Includes hands-free easy-hang bracket to mount over 4-inch electrical box, Quick-mount bracket available
- Rated Life: 219,000 Hours
- System Watts Filter: 44
- System Watts: 37
- Voltage: 120-277v
- Warranty: 5-Year Warranty

Product Gallery

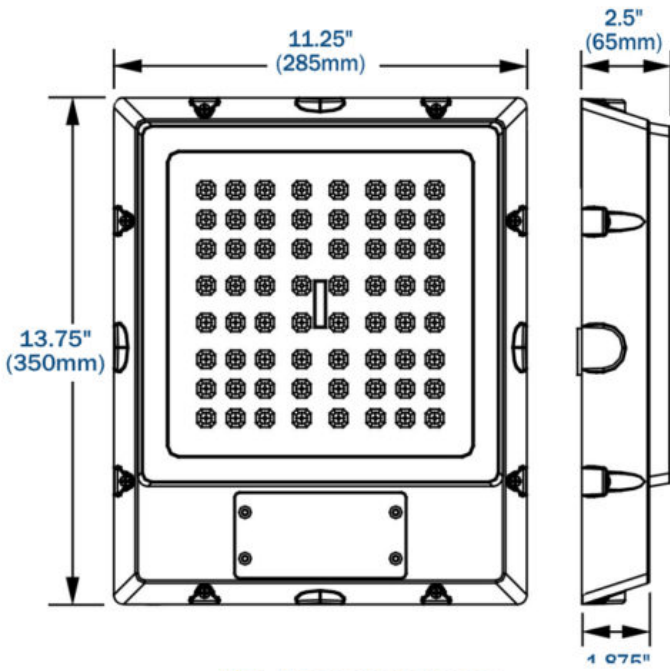



Garage Lighter
(back shown with built-in Easy-Hang bracket)






**Optional Hinged Quick-Mount
(2 views)**



Spectral Chart - Amber LED

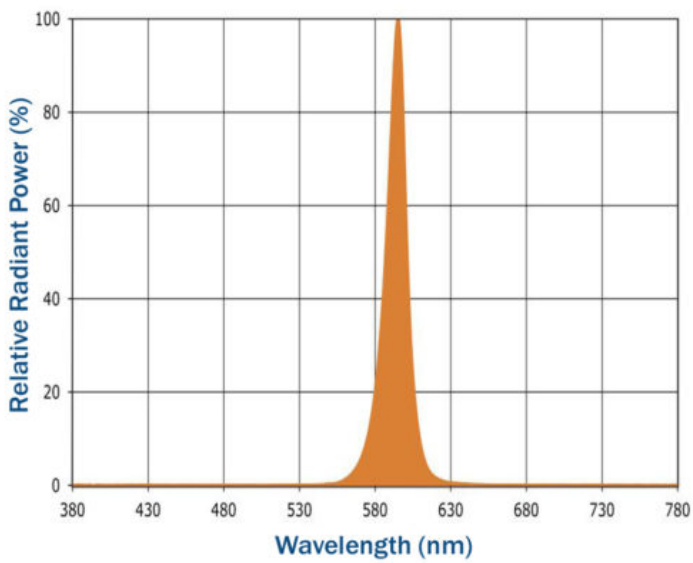

Turtle & Wildlife Friendly



120v-277v