

ZILO 50w LED Forward Throw Wall Pack with Photocell, 120-277v



SKU: AF63XLFA504UDZ

Product Tags: [LED](#)

Product Page: <https://www.accessfixtures.com/p/50w-led-zibo-traditional-exterior-wall-light/>

Product Description

ZILO 50w LED wall pack is a great choice for commercial, industrial, or hospitality areas requiring durable design. The integrated LEDs mean you never have to change a bulb. The die-cast aluminum housing alongside the super durable powder coat finish provide an impact, corrosion, and weather resistant fixture.

Photocell Included: The ZILO 50w LED wall pack features a photocell free of any additional charge. When activated, the photocell feature turns the light on at dusk and off at dawn for convenience and energy savings!

Maximum Value: At 118 lumens per watt, this fixture boasts maximum light output for the most value.

Prismatic Glass Lens: A prismatic borosilicate glass lens softly diffuses light and prevents glare.

Features:

- Die-cast aluminum housing - Dark Bronze powdercoat finish - 120-277v - 120v photocell - 0-10v dimmable driver
- Aluminum reflector - 4000K - 4,837 lumens - 100,000 L70 hours - Surface mount - UL and DLC listed - 80+ CRI - 8.82 lbs. - 14.30" x 9.20" x 7.50" in. - 5 year warranty **Access Fixtures 5-Year Warranty**

All Access Fixtures products come with a 5-year warranty. If your product is found to have a manufacturing defect, we will replace components, the entire product, or issue a refund. We stand behind the quality of our products. Our customer service team, located in Worcester, MA, is happy to address any questions, comments, or concerns you may have. Please give us a call at 800-468-9925. Please view Access Fixtures' [return policy](#). **Get a Custom Photometric Analysis for Your ZILO 50w LED Forward Throw Wall Pack Project?**

A photometric analysis is a custom computer simulation of your particular project. This service provides average footcandles at various heights, max/min (uniformity) ratios, minimum footcandles, light trespass levels, and more. For exacting lighting specifications, a photometric analysis helps you ensure light levels before making a big purchase. One of our lighting specialist will walk you through the process so you know exactly what you will be receiving. Call us at 800-468-9925 or customerservice@accessfixtures.com for more information about ordering a photometric analysis for your project.


Ready to Order ZILO 50w LED Forward Throw Wall Pack or Speak to a Lighting Specialist?

You can place your order online, here. Or, if you want additional information, give us a call at 800-468-9925. Does your project require multiple fixtures? Ask us about quantity discounts. Our team of friendly expert lighting specialists are available to provide what you need to purchase fixtures and illuminate your project with confidence.

Product Attributes

- Dimensions: 20 × 10 × 10 in
- Weight: 12 lbs
- Availability: Typically ships in 2-4 weeks
- Available Finishes: Bronze
- Color Rendering Index (CRI): 80+
- Color Temperature (K): 4000K
- Housing: Borosilicate glass with die-cast aluminum housing and stainless steel hardware
- System Watts: 50
- Lens: Clear prismatic glass lens
- Light Source: White Light Spectrum
- Light Source Included: LED Array Included
- Light Source Lumens: 4837
- Listings: CSA: Listed for wet locations, DLC Listed, UL Listed for Wet Locations
- Mounting: Mounts over 4-inch electrical box, Universal mounting ring
- Mounting Height: 10 ft., 15 ft., 20 ft.
- Product Family: ZILO
- Rated Life: 100,000 Hours
- Voltage: 120-277v
- Warranty: 5-Year Limited Warranty

Product Gallery


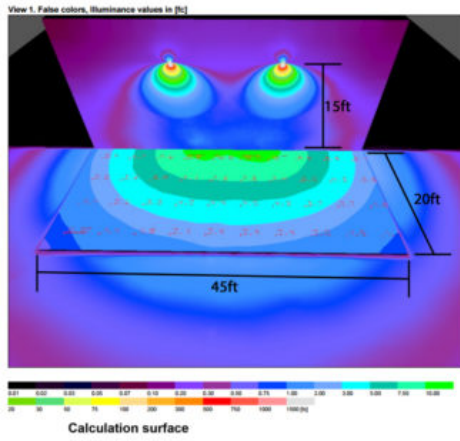


ZIBO 50w LED Wall Pack with Photocell
120-277v - 100w
HID EQV, MAX VALUE






+2	+5	+8	+10	+10	+10	+9	+5	+3
+2	+4	+6	+7	+7	+6	+7	+5	+4
+1	+2	+3	+4	+4	+4	+4	+3	+2
+0.9	+1	+2	+2	+2	+2	+2	+2	+1



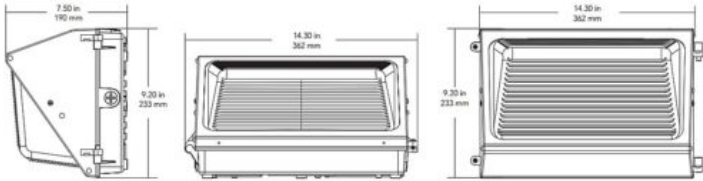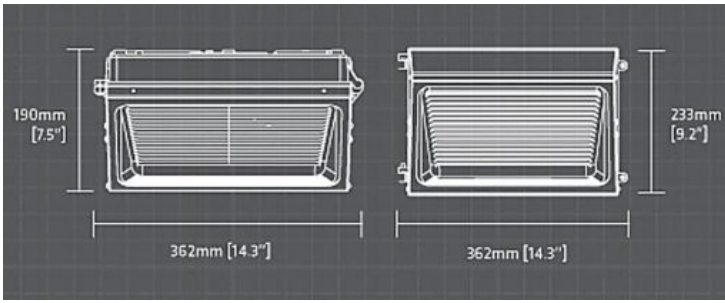


50w LED ZIBO Traditional Forward Throw Wall Pack 120v-277v
12' Mounting Height

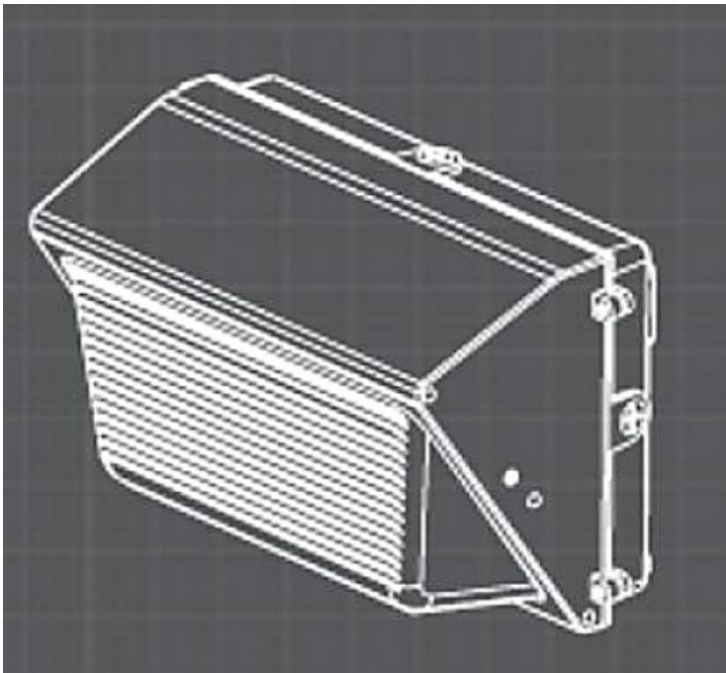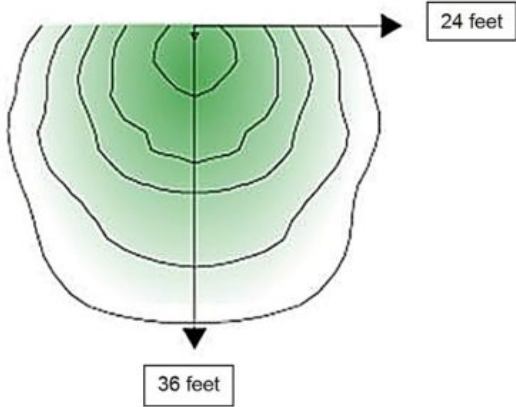


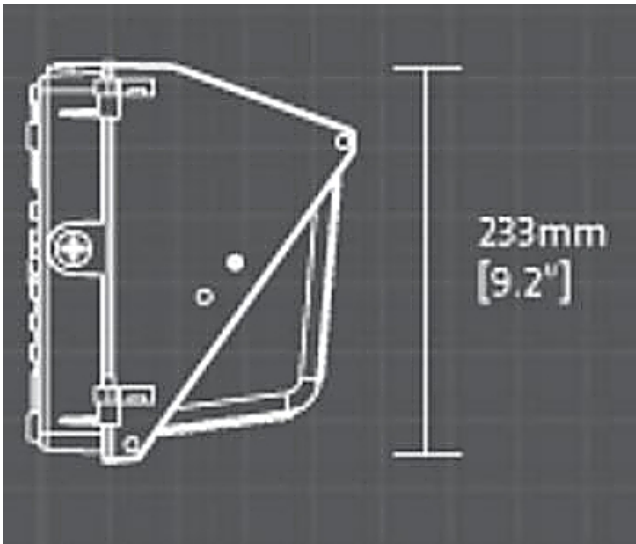


ZILO 50 Mounted at 10'
Emits >1fc 31' Across and 21' Out

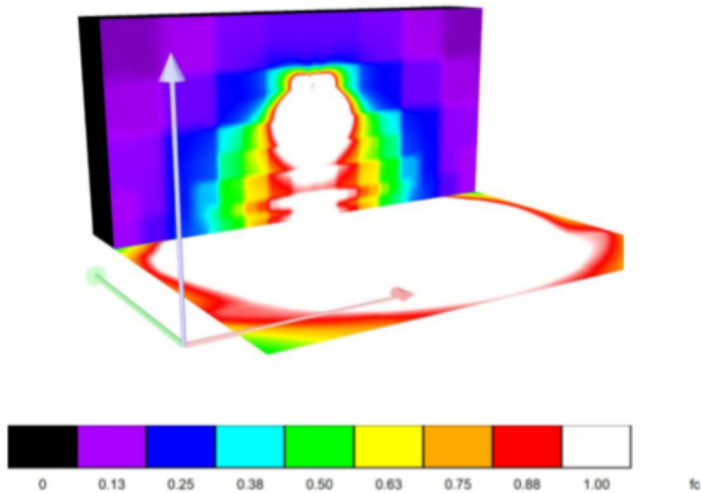



ZILO 50 Mounted at 15' Emits >1fc 34' Across and 25' Out

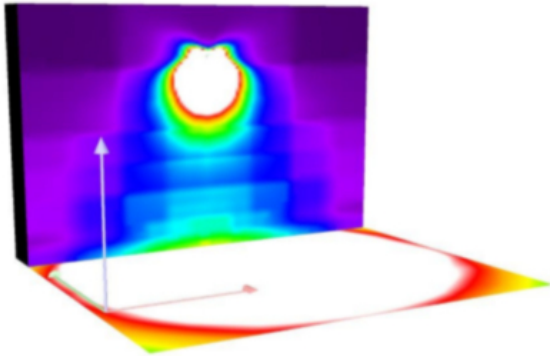

ZILO 50 Mounted at 20' Emits >1fc 31' Across and 21' Out

