


APTI 750 LED Modular Flood Light, Extreme Life, IP67, 347-480v

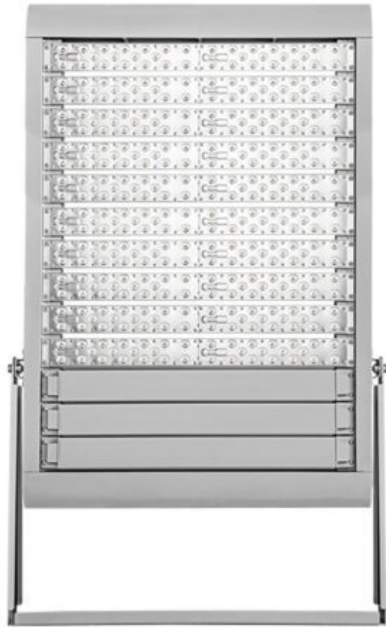


SKU: AF72XFLG750U

Product Page:

<https://www.accessfixtures.com/p/apti-802w-led-flood-347-480v-200000-hr-life-ip67-rated-u-bracket/>

Product Description

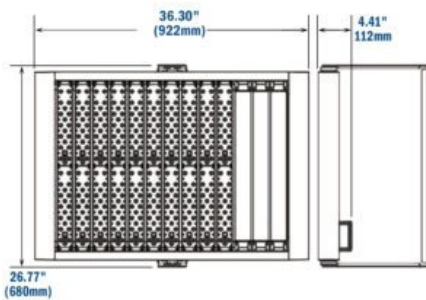

APTI high-voltage Flood Lights boast a waterproof IP67 rating, C-UL listing, and an environmentally-friendly RoHS certification.

APTI 750 LED Modular Flood Light, Extreme Life, IP67, 347-480v fixtures represent the latest in LED technology and commercial lighting design. With an astonishing L70 life of 200,000 hours, intuitive and modular LED arrays, easy mounting, an IP67 rating and salt-spray certification, and quick shipping, these fixtures make flood or area lighting projects a breeze. Always feel free to fill out an Access Fixtures RFQ form or call us at 800-468-9925 to get in touch with a member of the Access Fixtures team.

Lumen Output and Light Distribution Options: APTI 750 LED Modular Flood Light, Extreme Life, IP67, 347-480v

In efficiency, lumen output, and easy customization, the APTI 750 LED Modular Flood Light, Extreme Life, IP67, 347-480v luminaires are pretty impressive (if we do say so ourselves). At just 802 watts (system watts, which includes the power used by the LEDs and the driver), they emit 103,815 lumens, lending them an efficacy of 120 lumens/watt. This output gives you the flexibility to mount the fixture at a wide range of heights and still receive a terrific amount of landed light. Of course, the height at which you mount the APTI fixtures will depend on your specific application, but Access Fixtures makes it easy by offering a range of beam spreads. If you need a wide swath of light, select a wider beam angle using the drop-down options at the top of the page. If, however, you need a narrower beam spread, select a lower degree. And, if you aren't sure what the heck you need, give Access Fixtures a call and our team will gladly help you select the perfect beam spread for your project.



APTI 750 LED Modular Flood Light, Extreme Life, IP67, 347-480v come with a range of options: motion sensor, Kelvin temperature, color rendering index, and more. **Housing Design and Weather Resistance: APTI 750 LED Modular Flood Light, Extreme Life, IP67, 347-480v**

APTI 750 LED Modular Flood Light, Extreme Life, IP67, 347-480v fixtures are designed for easy maintenance, fortitude, and reliability. They feature die-cast aluminum housings and corrosion-resistant polyester powder coatings. You can select black (RAL 9011), bronze (RAL: 8019), gray (RAL: 7004), or white (RAL: 9010) housings; simply make your selection with the drop-down menu above.

The LED modules in this fixture boast IP67 ratings. The IP rating system defines how protected a fixture is against dust and water ingress. Fixtures like the APTI with an IP67 rating are completely dust- and waterproof. These are completely weather resistant in that they are safe against rain, snow, and water spray from any angle; they can even be fully immersed in a pool of water for a short amount of time. Perhaps more impressive than this, they meet 1,000-hour salt spray certification per ASTM B117 and ISO 9227-2012.

APTI 750 LED Modular Flood Light, Extreme Life, IP67, 347-480v fixtures have a tremendously thin profile (just 4.41 inches), which looks great and improves their resistance against steady and gusting winds. They have an EPA of just .894, making them viable fixtures for almost any environment. Call Access Fixtures today for more information about the APTI housing, design, or its preparedness for the weather.


Mounting Your APTI 750 LED Modular Flood Light, Extreme Life, IP67, 347-480v

The APTI 750 LED Modular Flood Light, Extreme Life, IP67, 347-480v fixture comes with an adjustable U-bracket that makes for quick, simple, and adjustable mounting. Mount these fixtures to walls, steel brackets, ceilings, and more. Access Fixtures can also supply you with pole-mount brackets (known as slip fitters), that secure over standard 2 3/8" pole-top tenons. We can also supply poles as well. Ask

an Access Fixtures lighting specialist for more information about these options.

Access Fixtures Warranty

Access Fixtures is proud to assemble high quality, long lasting lighting products which are covered by a 5-year warranty. In accordance with our warranty policy, we will offer repair, replacement, or refund for qualifying claims. Please contact our friendly customer service team, located in Worcester, MA, to address any questions or concerns you may have. We can be reached at 800-468-9925 Monday-Friday 9-5 EST or via email at sales@accessfixtures.com. Click [here](#) to view Access Fixtures' [complete warranty policy](#). Need a Photometric Analysis for Your Project?

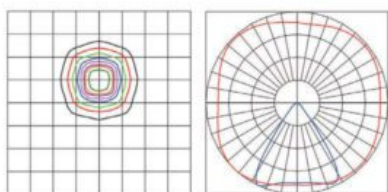

ATRI LEDs feature built-in beam angles.
Shown here are ISO plot and polar curve for a 60° beam angle



APTI luminaires feature LEDs with built-in optics ranging from narrow 10-15° beam angles, ideal for higher mountings, to wide 150° beam angles, which are appropriate parking garages, and other interior applications. [For details, see photometric optics options.](#)

A photometric analysis is a computer simulation of a particular project. Whether using these fixtures to illuminate a parking lot, athletic field, rail yard, dock, or something else entirely, a photometric analysis is an easy way to quantify your light levels before making a big purchase. This service will provide average footcandles, max/min (uniformity) ratios, minimum footcandles, light trespass levels, and more. When the report(s) are generated, a lighting specialist will walk you through them, page by page, so you know exactly what you will be receiving. Call us at 800-468-9925 or email customerservice@accessfixtures.com for more information about ordering a photometric analysis for your project.

Ready to Order an APTI 750 LED Modular Flood Light, Extreme Life, IP67, 347-480v or Speak to a Lighting Specialist?


If you need some additional information about this fixture, give us a call at 800-468-9925. Of course, you can place your order online, right here, but our team is available to answer any questions that may come up. Does your project require multiple fixtures? Ask us about quantity discounts. We are here to provide anything you need to purchase fixtures and illuminate your project with confidence.

Product Attributes

- Dimensions: 36.30 × 26.77 × 4.41 in
- Weight: 60.63 lbs
- Availability: Typically ships in 6-8 weeks.
- Light Source: 3000K - Neutral White, 4000K - Cool White, 5000K - Bright White, 5700K - Cinematography
- Available Finishes: Black, Bronze, Gray, White
- Ballast/Driver: Electronic 50/60 Hz
- Color Rendering Index (CRI): 70+, 80+, 90+
- Housing: Modular design, Vandal resistant screws optional, Die cast aluminum housing, Finish meets 1000-hour salt-spray certification per ASTM B117/ ISO 9227:2012
- Lens: 15+ optical lenses available for specific distribution patterns
- Light Source Included: LED Array Included
- Light Source Lumens: 103950
- Light Source Lumens Filter: 100,000+
- Listings: IP67, RoHS Compliant, CB, CE, CuL Listed, DLC Listed, IK08, LM79, SAA, UL Listed
- Mounting: Slip Fitter, Yoke Mount/U-Bracket Mount
- Product Family: APTI
- Rated Life: 200,000+ Hours

- System Watts: 769
- System Watts Filter: 500w - 999w
- Voltage: 347-480v
- Warranty: 5-Year Limited Warranty

Product Gallery

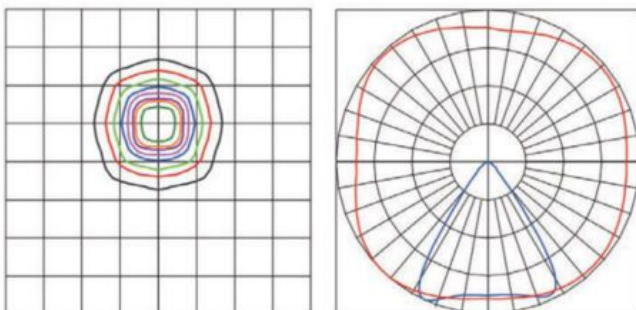

ATRI LEDs feature built-in beam angles.
Shown here are ISO plot and polar curve for a 60° beam angle



