

## CARO 235 LED Flood Light - LED Area Light, 160+ LPW, 120-277v



**SKU:** AF55XL6015/235/xxxxK/Tx

**Product Tags:** [Area Light](#), [Flood Light](#), [LED](#)

**Product Page:**

<https://www.accessfixtures.com/p/caro-235-led-flood-light-led-area-light-160-lpw-120-277v/>

### Product Description

CARO LED Area Light / LED Flood Light Features:

- One piece die-cast aluminum housing - DLC, UL, cUL, CE, RoHs Listed - 70+ CRI - Dimmable 1-10v - 38,634 lumens with 5000K - 160 to 170 Lumens per Watt (LPW) - 50,000 hour L70 rated life - IP65 Rated: protected from total dust ingress; protected from high pressure water jets from any direction - Bronze UV Stabilized Powdercoat Finish CARO LED Area Light / LED Flood Light

## Options:

- Bracket mount (trunnion), slip fitter mount, or pole arm mount - Pole side back light shield - Voltage - 120-277v - Optics - Type III, Type IV, or Type V - Kelvin - 4000K or 5000K - Photocell - Twist lock photocell with receptacle - Bi-level microwave control with occupancy sensor and daylight harvesting - Surge Protection - 4kV standard, 20kV optional Access Fixtures Warranty

Access Fixtures is proud to assemble high quality, long lasting lighting products which are covered by a 5-year warranty. In accordance with our warranty policy, we will offer repair, replacement, or refund for qualifying claims. Please contact our friendly customer service team, located in Worcester, MA, to address any questions or concerns you may have. We can be reached at 800-468-9925 Monday-Friday 9-5 EST or via email at [sales@accessfixtures.com](mailto:sales@accessfixtures.com). Click [here](#) to view Access Fixtures' [complete warranty policy](#).

CARO LED Area Light / LED Flood Light Photometric Analysis  
A photometric analysis creates a computer simulation of a particular project. No matter what you are lighting, a photometric analysis is an easy way to quantify light levels before purchasing. When a report is generated, a lighting specialist will walk you through it so you know exactly what you will be receiving. Photometric studies include average and minimum footcandles, uniformity ratios, spacing, light trespass info, and more. Plus, the cost of the study is refunded back to you when you purchase the fixtures. Call us at 800-468-9925 for more information about ordering a photometric analysis for your project.

CARO LED Area Light / LED Flood Light Orders and Questions

You can place your order online, [here](#). Or, if you want additional information, give us a call at 800-468-9925. Does your project require multiple fixtures? Ask us about quantity discounts. Our team of friendly expert lighting specialists are available to provide what you need to purchase fixtures and illuminate your project with confidence.

## Product Attributes



- Dimensions: 18 &times; 29 &times; 9 in


- Weight: 26 lbs
- Availability: Typically ships in 7-10 business days
- Light Source: 3000 Kelvin LED Light Fixtures, 4000K - Cool White, 5000K - Bright White
- Available Finishes: Bronze
- Ballast/Driver: Electronic 50/60 Hz
- Color Rendering Index (CRI): 70+
- Housing: Die-cast aluminum housing
- Lens: Polycarbonate
- Light Source Included: LED Array Included
- Light Source Lumens: 38,634
- Listings: RoHS Compliant, Wet locations, CuL Listed, DLC Premium, IP65, UL
- Mounting: Direct Square Mounting Arm, Slip Fitter, Yoke Mount/U-Bracket Mount
- Product Family: CARO
- Rated Life: 50,000 Hours
- System Watts: 229
- Voltage: 120v, 208v, 240v, 277v, 480v
- Warranty: 5-Year Limited Warranty

## Product Gallery





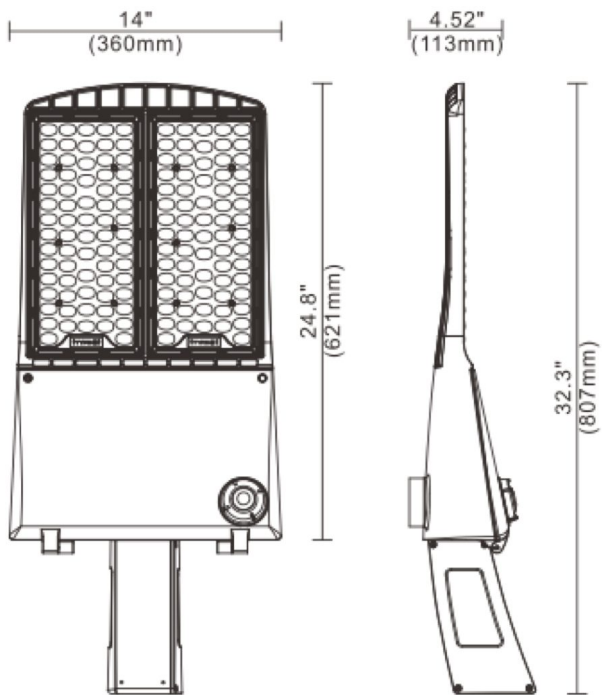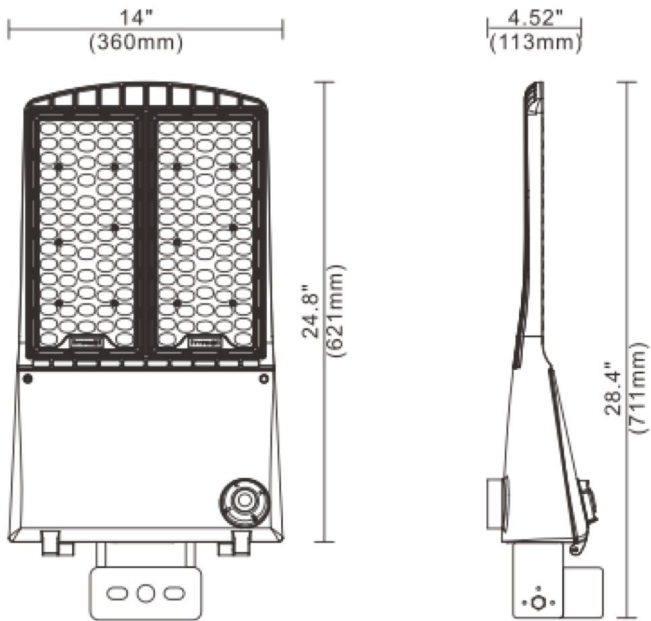

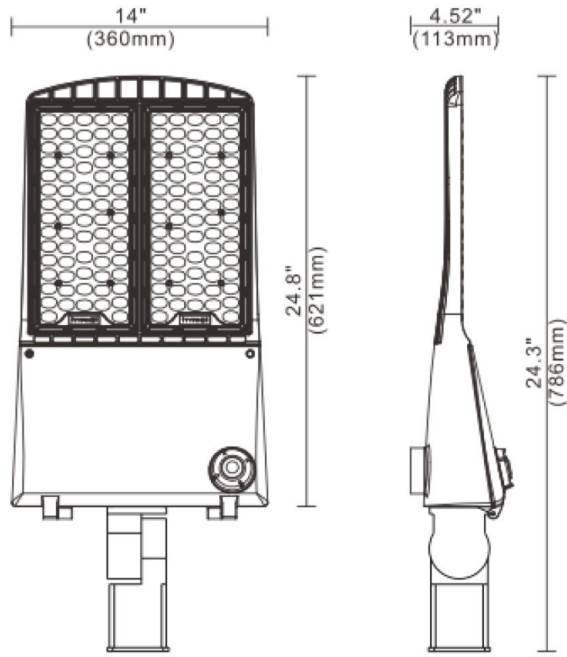

## CARO Optics

