

## GOOS 26 LED Gooseneck - Barn Light LED Light Fixture, 120-277v



**SKU:** AF33XAS201QF1X23U5KC

**Product Tags:** [LED](#), [Wall Pack](#)

**Product Page:**

<https://www.accessfixtures.com/p/goos-26-led-gooseneck-wall-mount-fixture-120-277v/>

### Product Description

The GOOS 26 LED Gooseneck Light Fixture, 120-277v is an LED wall mount fixture.

**Arm Options:** Choose between five uniquely shaped wall mount arm options for any project.

**Extreme Life:** GOOS is L70 rated at 457,000 hours, making it virtually maintenance-free.

**Durable Construction:** The GOOS is CSA listed and IP66 rated against dust and water intrusion.

#### Features:

- 26w integrated LEDs - Prismatic polycarbonate lens - Powdercoat finish - 5000K - 116 lumens per watt - Die cast aluminum housing - 120-277v - Mountable at multiple heights - IP66 rated and CSA listed - Dimmable driver - 80+ CRI - 3,022 lumens - L70 rated life of 457,000 hours - Type V wide optics

#### **See photos for dimensions** Options:

- Choose Platinum (RAL 9006), White (9016), Black (RAL 9011), or Red (RAL 3020) - Choose a classic hook arm, straight arm, straight offset arm, straight rise arm, or round hook arm - Choose a round wall plate or a square wall plate

#### Access Fixtures Warranty

Access Fixtures is proud to assemble high quality, long lasting lighting products which are covered by a 5-year warranty. In accordance with our warranty policy, we will offer repair, replacement, or refund for qualifying claims. Please contact our friendly customer service team, located in Worcester, MA, to address any questions or concerns you may have. We can be reached at 800-468-9925 Monday-Friday 9-5 EST or via email at [sales@accessfixtures.com](mailto:sales@accessfixtures.com). Click here to view Access Fixtures' [complete warranty policy](#). Need a Photometric Analysis for Your Project?

A photometric analysis creates a computer simulation of a particular project. No matter what you are lighting, a photometric analysis is an easy way to quantify light levels before purchasing. When a report is generated, a lighting specialist will walk you through it so you know exactly what you will be receiving. Photometrics include average and minimum footcandles, uniformity ratios, spacing, light trespass info, and more. Plus, the cost of the study is refunded back to you when you purchase the fixtures. Call us at **800-468-9925** for more information about ordering a photometric analysis for your project.

Ready to Order or Speak to a Lighting Specialist?



You can place your order online or if you want additional information, give us a call at **800-468-9925**. Our team of friendly, expert high performance lighting specialists are available to provide what you need to purchase fixtures and

illuminate your project with confidence.


## Product Attributes

- Dimensions: 20 &times; 15 &times; 10 in
- Weight: 18 lbs
- Availability: Typically ships in 7-10 business days
- Light Source: 5000K - Bright White
- Available Finishes: Platinum, Red, Black, White
- Color Rendering Index (CRI): 80+
- Housing: Die cast aluminum housing
- Lens: Clear prismatic polycarbonate lens
- Light Source Included: LED Array Included
- Light Source Lumens: 3,022
- Listings: IP66, CSA: Listed for wet locations
- Mounting: Power supplied via electrical box or 1/2-inch conduit, Includes template for mounting directly over 4-inch electrical box
- Mounting Height: 10 ft., 15 ft.
- Product Family: GOOS
- Rated Life: 457,000 Hours
- System Watts: 26
- Voltage: 120-277v
- Warranty: 5-Year Limited Warranty
- Style: Full Cutoff

## Product Gallery

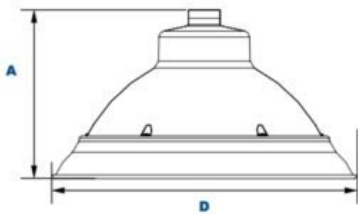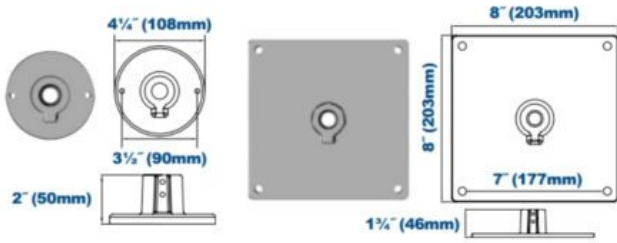


Dimensions	
Diameter (D)	15 1/4" (386mm)
Height (A)	8 1/2" (214mm)

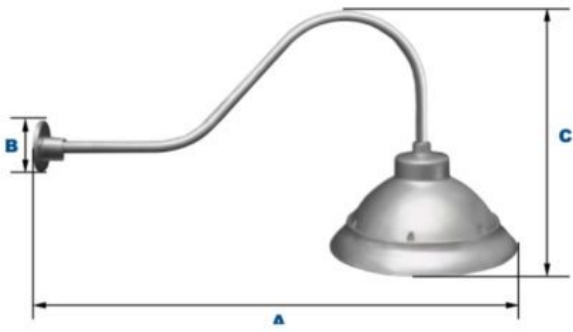


### Dimensions

<b>Base Diameter (B)</b>	4¼" (108mm)
<b>Length (A)</b>	43½" (1099mm)
<b>Height (C)</b>	23¼" (591mm)

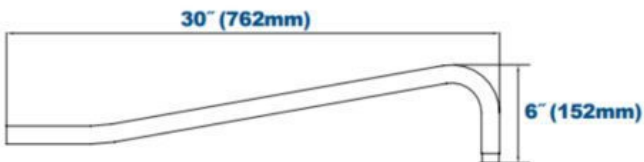


Straight Rise Arm

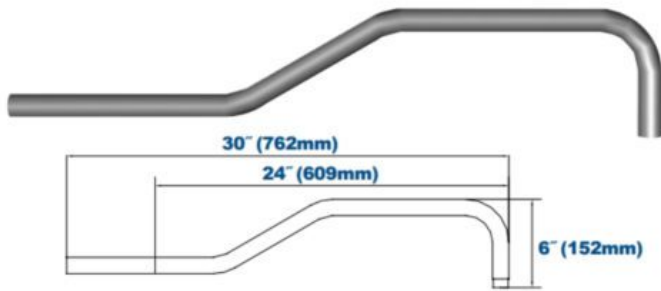


Straight Offset Arm



Straight Arm

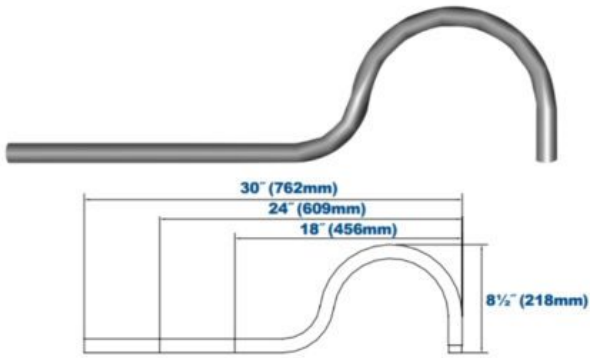

Round Hook Arm

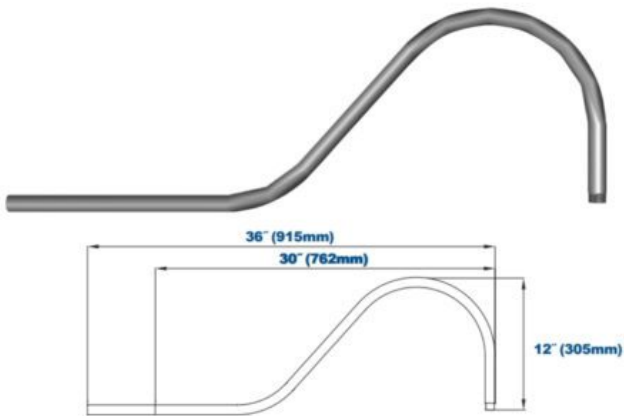

Classic Hook Arm



**BUY AMERICAN  
ACT COMPLIANT**