

OPPE 37 LED Square Pyramid Top Bollard Light, 120-277v



SKU: AF33XB2CQF1X34U

Product Tags: [bollard light](#), [LED](#)

Product Page:

<https://www.accessfixtures.com/p/oppe-37-led-square-pyramid-top-bollard-light-120-277v/>

Product Description

The OPPE 37 LED Square Pyramid Top Bollard Light 120-277v is an excellent way to light pathways, sidewalks, gardens, entryways, steps, ramps, and more.

Durable Construction: This bollard light comes equipped with a durable exterior, vandal-resistant screws, and is IP66 rated against water and dust.

Unique Architectural Design: OPPE is designed with a modern, extruded aluminum housing design which is perfect for many locations.

Extreme Life: The OPPE bollard light is L70 rated for 106,000 hours, guaranteeing years and years of maintenance-free use.

Features:

- 37w integrated LED - Dimmable 0-10v - 120-277v - Powdercoat finish over a chromate conversion coating - Cone reflector optics - Up to 3,263 lumens - 106,000 hour L70 rated life - IP66 rated against dust and water - Anchor bolts, mounting templates included

Options:

- Choice of Kelvin - 3000K or 4000K - Choice of Lens - clear shatter resistant polycarbonate or opal shatter resistant polycarbonate - Choice of height - Standard 34 3/4" height or 30" height - Choice of Finish - Black, bronze, and custom RAL colors available upon request - Add surge protection or a GCFI outlet - Choice of shipping anchor bolts ahead of time or with bollard light

Access Fixtures Warranty

Access Fixtures is proud to assemble high quality, long lasting lighting products which are covered by a 5-year warranty. In accordance with our warranty policy, we will offer repair, replacement, or refund for qualifying claims. Please contact our friendly customer service team, located in Worcester, MA, to address any questions or concerns you may have. We can be reached at 800-468-9925 Monday-Friday 9-5 EST or via email at sales@accessfixtures.com. Click here to view Access Fixtures' [complete warranty policy](#). Need a Photometric Analysis for Your OPPE 37 LED Square Pyramid Top Bollard Light 120-277v?

A photometric analysis creates a computer simulation of a particular project. No matter what you are lighting, a photometric analysis is an easy way to quantify light levels before purchasing. When a report is generated, a lighting specialist will walk you through it so you know exactly what you will be receiving. Photometrics include average and minimum footcandles, uniformity ratios, spacing, light trespass info, and more. Plus, the cost of the study is refunded back to you when you purchase the fixtures. Call us at 800-468-9925 for more information about ordering a photometric analysis for your project.

Ready to Order OPPE 37 LED Square Pyramid Top Bollard Light 120-277v or Speak to a Lighting Specialist?


You can place your order online, here. Or, if you want additional information, give

us a call at 800-468-9925. Does your project require multiple fixtures? Ask us about quantity discounts. Our team of friendly expert lighting specialists are available to provide what you need to purchase fixtures and illuminate your project with confidence.

Product Attributes


- Dimensions: 8 × 8 × 40 in
- Weight: 30 lbs
- Availability: Typically ships in 7-10 business days
- Light Source: 3000K - Neutral White, 4000K - Cool White
- Available Finishes: Black, Bronze, Custom RAL
- Lens: Clear polycarbonate lens, Opalescent polycarbonate lens
- Light Source Included: LED Array Included
- Light Source Lumens: 3,263
- Listings: CSA - listed for wet Locations, IP66
- Mounting: Mounting kit with anchor bolts Included.
- Housing: Extruded aluminum with flush-mounted base, vandal-resistant screws, powdercoat finish over chromate conversion coating, internal driver tray
- Rated Life: 106,000 Hours
- Reflector: White polycarbonate cone reflector
- Size: 7"
- Style: Cone Reflector, Pyramid Top, Square
- System Watts Filter: 20w - 49w
- System Watts: 37
- Voltage: 120-277v
- Warranty: 5-Year Limited Warranty

Product Gallery




Dimensions

Width (B)	9 1/4" (234mm)
Diameter (D)	7" (180mm)
Height (A)	Flat Top: 35 1/4" (908mm)
	Dome Top: 38 1/8" (968mm)
	Pyramid Top: 38 1/8" (968mm)

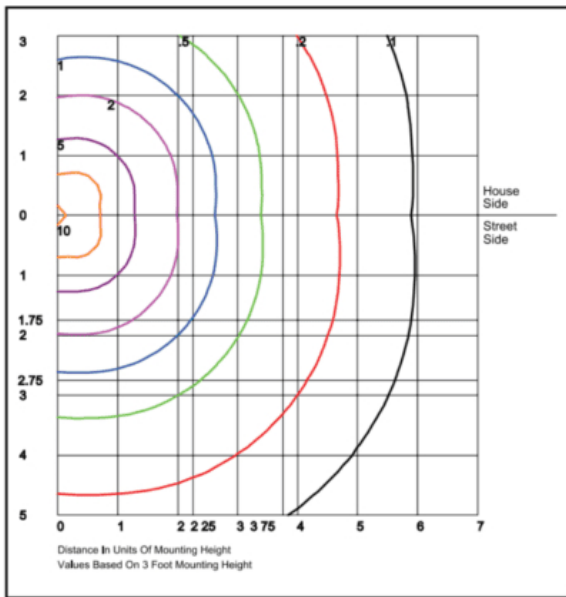

AF33XB2QF1X34U4KL & AF33XB2CQF1X34U4KL Type V, Opal Lens
 Grid in feet, Mounting Height = 3 ft.

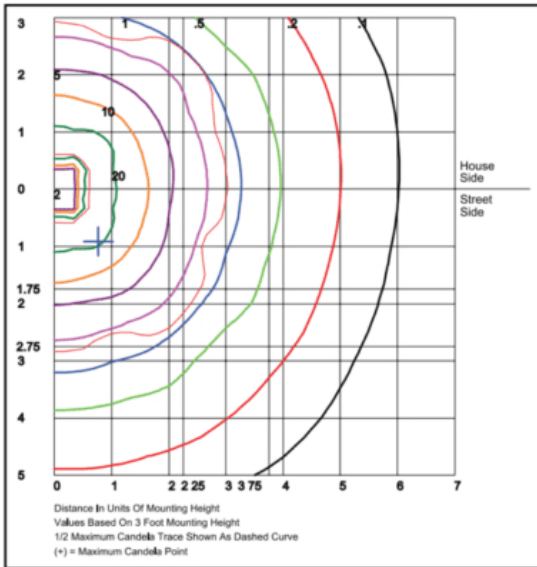

**AF33XB2QF1X34U4KC &
AF33XB2CQF1X34U4KC Type V, Clear
Lens**
Grid in feet, Mounting Height = 3 ft.