

PYLI LED Top Bollard, Selectable Kelvin and Wattage 10/20/30



SKU: AF55XGRPL5510S

Product Tags: [Area Light](#), [Exterior Lighting](#), [Flood Light](#), [LED](#), [Outdoor Lighting](#)

Product Page:

<https://www.accessfixtures.com/p/pyli-led-bollard-light-selectable-kelvin-and-wattage-10-20-30/>

Product Description

PYLI LED Bollard Light Features:

Selectable Wattage

10/20/30

Selectable Kelvin

- 3000K, 4000K, 5000K - 42" height x 5.74" diameter - Bronze finish - Type V

Lumen output:

- 3,996 lumens - 129 lumens per watt - 120-277v, 347-480v - UL and CUL listed for wet locations - RoHS compliant

Extruded aluminum alloy body

- Provides strength and durability while protecting and concealing the component wiring - 4kV surge protection - UV-stabilized powder-coated finish - High-impact polycarbonate diffuser

Anodized aluminum reflector

- Designed to reduce glare and produce an even distribution

Easy access to CCT and wattage control

- Easily switch between CCT and wattages to find the best lighting for your project - A versatile mounting plate allows for easy installation and replacement for any project or development

Air-tight LED compartment to prevent fogging and condensation build-up

- Keeps water out too

Driver is mounted under the LED compartment at the top of the bollard for easy replacement and to protect water from accumulating in the base of the bollard

- Torx security screws secure the LED compartment to the base to deter vandalism - Terminal block provided on the base bracket for easy installation - 80+ CRI - 5-year Access Fixtures warranty **Access Fixtures Warranty**

Access Fixtures is proud to assemble high quality, long lasting lighting products which are covered by a 5-year warranty. In accordance with our warranty policy, we will offer repair, replacement, or refund for qualifying claims. Please contact our friendly customer service team, located in Worcester, MA, to address any questions or concerns you may have. We can be reached at 800-468-9925 Monday-Friday 9-5 EST or via email at sales@accessfixtures.com. Click here to view Access Fixtures' [complete warranty policy](#). Need a Photometric Analysis for Your LED Bollard-Light Lighting Project?

A photometric analysis creates a computer simulation of a particular project. No matter what you are lighting, a photometric analysis is an easy way to quantify light levels before purchasing. When a report is generated, a lighting specialist will walk you through it so you know exactly what you will be receiving. Photometric studies include average and minimum footcandles, uniformity ratios, spacing, light trespass info, and more. Plus, the cost of the study is refunded back to you when you purchase the fixtures. Call us at **800-468-9925** for more information about ordering a photometric analysis for your project.

Ready to Order or Speak to a Lighting Specialist?

You can place your order online or if you want additional information, give us a call at **800-468-9925**. Our team of friendly, expert high-performance lighting specialists are available to provide what you need to purchase fixtures and illuminate your project with confidence.

Product Attributes


- Dimensions: 20 × 17 × 26 in
- Weight: 5 lbs
- Availability: Typically ships in 7-10 business days
- Light Source: 3000 Kelvin LED Light Fixtures, 4000K - Cool White, 5000K - Bright White
- Available Finishes: Bronze
- Housing: Extruded aluminum alloy body
- Lens: High-impact polycarbonate lens
- Light Source Included: LED Array Included
- Light Source Lumens: 3,997
- Listings: RoHS Compliant, CSA: Listed for wet locations, DLC Listed, UL
- Product Family: PYLI
- System Watts Filter: 1w - 19w, 20w - 49w
- System Watts: Selectable Watts 10/20/30w
- Voltage: 120v, 208v, 240v, 277v, 347v, 480v

- Warranty: 5-Year Limited Warranty

Product Gallery



Mounting Base

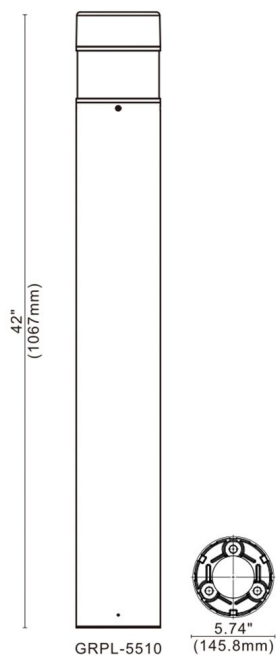

GRPL-5510



