


SHOO 14w LED Mini Wall Pack with Photocell, 120-277v

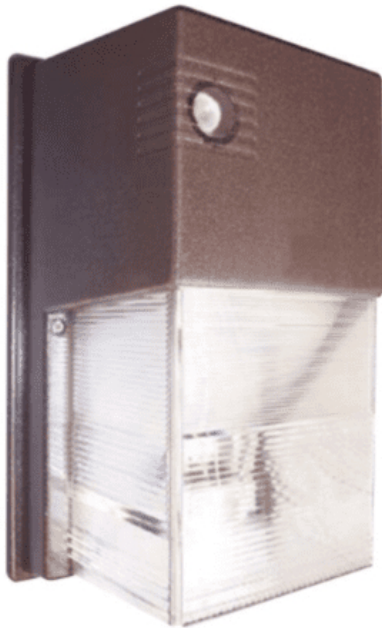

SKU: AF33XWP14QF1X13U5K

Product Tags: [LED](#)

Product Page:

<https://www.accessfixtures.com/p/shoo-14w-led-wall-pack-photocell/>

Product Description

The SHOO 14w LED Mini Wall Pack Light Fixture with Photocell, 120-277v provides widespread, optically controlled light designed to replace HID lighting systems. This fixture delivers extraordinary light and is ideal for lighting retail centers, industrial parks, schools, universities, public transit, airports, office buildings, medical facilities, and other exterior applications. This forward throw fixture sends light out and forward in a rounded distribution pattern with the goal of increasing light output.

Value: The cost-efficient LED wall pack features high-performance LEDs that deliver a total of 1,054 lumens, L70 rated life of 165,000 hours, and has an operating temperature of -40°C to +40°C,

Lens: Molded prismatic shatter resistant polycarbonate lens that allows light to disperse evenly while maintaining strength and durability.

Photocell: Mini Wall Pack Light Fixture features built-in photocell automatically detects dusk and dawn and turns your wall pack on or off accordingly - adding extra savings in energy costs!

Features

SHOO 14w LED Mini Wall Pack light Fixture with Photocell, 120-277v includes:

- Wall pack light fixture - Built-in photocell - Die-cast aluminum housing - 120-277v - 14w - 1,054 lumens - L70 rated life of 165,000 hours - Operating temperature of -40°C to +40°C - Prismatic shatter resistant polycarbonate glass lens - IP55 rated - CSA Listed for outdoor use in wet locations

Color rendering index (CRI) of 80+ (learn more about Color Rendering Index [here](#))

- Built-in 0-10v dimmable driver - Bronze finish with option of custom RAL color
- 11" x 6.75" x 5.25" - 3 lbs. Options

Choice of Finish: Bronze or Custom RAL (learn more [here](#)).

Kelvin Temperature: 3000K or 5000k (learn more [here](#)).

Mounting

SHOO 14w LED Mini Wall Pack with Photocell, 120-277v includes all hardware required for mounting:

- 4-inch recessed outlet box using a cast-in template, or ½" surface conduit access on the bottom of the fixture. [Access Fixtures Warranty](#)

Access Fixtures is proud to assemble high quality, long lasting lighting products which are covered by a 5-year warranty. In accordance with our warranty policy, we will offer repair, replacement, or refund for qualifying claims. Please contact our friendly customer service team, located in Worcester, MA, to address any questions or concerns you may have. We can be reached at 800-468-9925 Monday-Friday 9-5

EST or via email at sales@accessfixtures.com. Click here to view Access Fixtures' [complete warranty policy](#). Need a Photometric Analysis for Your SHOO 14w LED Mini Wall Pack with Photocell, 120-277v Project?

A photometric analysis creates a computer simulation of a particular project. No matter what you are lighting, a photometric analysis is an easy way to quantify light levels before purchasing. When a report is generated, a lighting specialist will walk you through it so you know exactly what you will be receiving. Photometrics include average and minimum footcandles, uniformity ratios, spacing, light trespass info, and more. Plus, the cost of the study is refunded back to you when you purchase the fixtures. Call us at **800-468-9925** for more information about ordering a photometric analysis for your project.

Ready to Order SHOO 14w LED Mini Wall Pack with Photocell, 120-277v or Speak to a Lighting Specialist?

You can place your order online or if you want additional information, give us a call at **800-468-9925**. Our team of friendly, expert high performance lighting specialists are available to provide what you need to purchase fixtures and illuminate your project with confidence.

Product Attributes

- Dimensions: 13 × 8 × 8 in
- Weight: 5 lbs
- Availability: Typically ships in 6-8 weeks.
- Light Source: 3000K - Neutral White, 5000K - Bright White
- Available Finishes: Bronze, Custom RAL
- Color Rendering Index (CRI): 80+
- Housing: Die cast aluminum housing
- Lens: Molded prismatic polycarbonate lens and front housing
- Light Source Included: LED Array Included
- Light Source Lumens: 1054
- Listings: CSA: Listed for wet locations

- Mounting: Mounts over 4-inch electrical box
- Product Family: SHOO
- Rated Life: 165,000 Hours
- System Watts: 14
- Voltage: 120-277v
- Warranty: 5-Year Limited Warranty
- Style: Forward Throw

Product Gallery

