

## VERT 25 12' LED Column Light, 120-277v, Extreme Life



**SKU:** AF33XB8TQF1X24U

**Product Tags:** [Bollard](#), [LED](#)

**Product Page:**

<https://www.accessfixtures.com/p/vert-12-led-column-light-120-277v-extreme-life/>

### Product Description

VERT 25 12' LED Column Light, 120-277v, Extreme Life is an all in one tall bollard light fixture.

**Broad Light Distribution:** This column light provides broad light distribution without the cost of a pole.

**Unique Architectural Design:** VERT is an architecturally interesting light source for commercial and municipal applications.

**Glare Free Optics:** This column light is equipped with an opal shatterproof

polycarbonate lens for no glare.

#### Features:

- 25w integrated LED - Dimmable 0-10v - 120-277v - Powdercoat finish over a chromate conversion coating - Type V - Opalescent shatterproof polycarbonate lens - Up to 2,809 lumens - 187,000 hour L70 rated life - IP66 rated against dust and water - CSA listed - Ships with M18 x 15" anchor bolts - 5 year

#### warranty Options:

- Choice of kelvin - 3000K, 4000K or 5000K - Choice of height - Standard 12' or 60" - Choice of finish - Black or platinum - Choice of surge protection - Choice to ship anchor bolts faster **Access Fixtures Warranty**

Access Fixtures is proud to assemble high quality, long lasting lighting products which are covered by a 5-year warranty. In accordance with our warranty policy, we will offer repair, replacement, or refund for qualifying claims. Please contact our friendly customer service team, located in Worcester, MA, to address any questions or concerns you may have. We can be reached at 800-468-9925 Monday-Friday 9-5 EST or via email at [sales@accessfixtures.com](mailto:sales@accessfixtures.com). Click here to view Access Fixtures' [complete warranty policy](#). Need a Photometric Analysis for Your VERT 25 12' LED Column Light, 120-277v, Extreme Life?

A photometric analysis creates a computer simulation of a particular project. No matter what you are lighting, a photometric analysis is an easy way to quantify light levels before purchasing. When a report is generated, a lighting specialist will walk you through it so you know exactly what you will be receiving. Photometrics include average and minimum footcandles, uniformity ratios, spacing, light trespass info, and more. Plus, the cost of the study is refunded back to you when you purchase the fixtures. Call us at 800-468-9925 for more information about ordering a photometric analysis for your project.

Ready to Order VERT 25 12' LED Column Light, 120-277v, Extreme Life or Speak to a Lighting Specialist?

You can place your order online, here. Or, if you want additional information, give us a call at 800-468-9925. Does your project require multiple fixtures? Ask us about quantity discounts. Our team of friendly expert lighting specialists are available to provide what you need to purchase fixtures and illuminate your project with

confidence.

## Product Attributes



- Dimensions: 144 &times; 9 &times; 9 in
- Weight: 50 lbs
- Availability: Typically ships in 7-10 business days
- Light Source: 3000K - Neutral White, 4000K - Cool White, 5000K - Bright White
- Available Finishes: Platinum, Black
- Lens: Opalescent polycarbonate lens
- Light Source Included: LED Array Included
- Light Source Lumens: 2,809
- Listings: CSA - listed for wet Locations, IP66
- Mounting: Mounting kit with anchor bolts Included.
- Housing: Extruded aluminum with flush-mounted base, vandal-resistant screws, powdercoat finish over chromate conversion coating, internal driver tray
- Rated Life: 187,000 Hours
- Reflector: White polycarbonate cone reflector
- Size: 5"
- Style: Round Flat Top
- System Watts Filter: 20w - 49w
- System Watts: 25
- Voltage: 120-277v
- Warranty: 5-Year Limited Warranty

## Product Gallery




### Dimensions

<b>Diameter (D)</b>	5" (128mm)
<b>Height (A)</b>	144 $\frac{3}{4}$ " (3675mm)
<b>Mounting Base (B)</b>	8" (205mm) Square
<b>Decorative Round Base Cover (B)</b>	16 $\frac{1}{2}$ " (422mm) Diameter

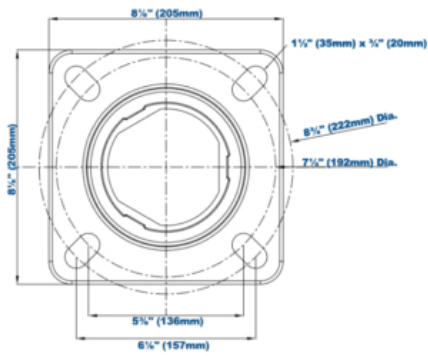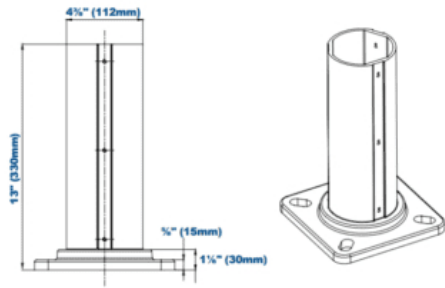

### 5' Tall VERT 25 Emits 1fc up to 8' Away

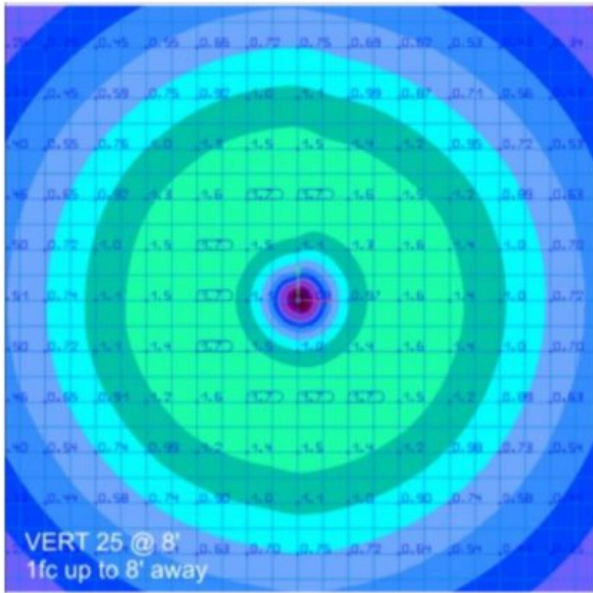

### 8' Tall VERT 25 Emits 1fc up to 8' Away

