

SPEC SHEET

SHOB

LED Wall Packs - Round



AccessFixtures.com

1

Type 5 Optics:

This unit provides optically controlled wide spread light distribution designed to replace HID lighting systems up to 70w metal halide fixtures with high performance LEDs.

2

Extreme Value:


679 lumens, EXTREME -LIFE rated L70 @ 187,000 hours, and IP65 rated for protection against dust and water.

3

Photocell:

Built-in photocell automatically detects dusk and dawn to turn the wall pack on or off accordingly – adding extra savings in energy costs!

highlights

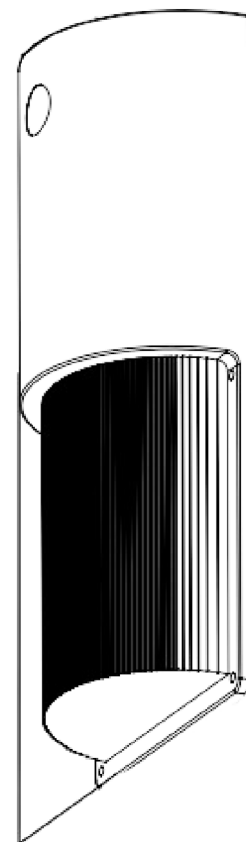

PH: 800-468-9925

Sales@AccessFixtures.com

AccessFixtures.com



AccessFixtures

High-Performance Lighting Solutions




SHOB FEATURES

Available Finishes	Bronze, Custom RAL
Finish	Bronze UV-Stabilized Polycarbonate Front Housing with Clear Prismatic Lens Area.
Lens	Molded Prismatic UV-Stabilized Polycarbonate Lens & Front Housing.
Optic	Type IV
Listings	IP65 rated
Product Family	SHOB
Rated Life	L70 @ 165,000 hours
Voltage	120-277v
Warranty	5-Year Limited Warranty
Mounting Options	Cast-in Template for Mounting Directly Over a 4" Recessed Outlet Box, or Use ½" Surface Conduit.
Housing	Die Cast Aluminum Back Plate. Aluminum reflector





SHOB PHOTOMETRIC DATA

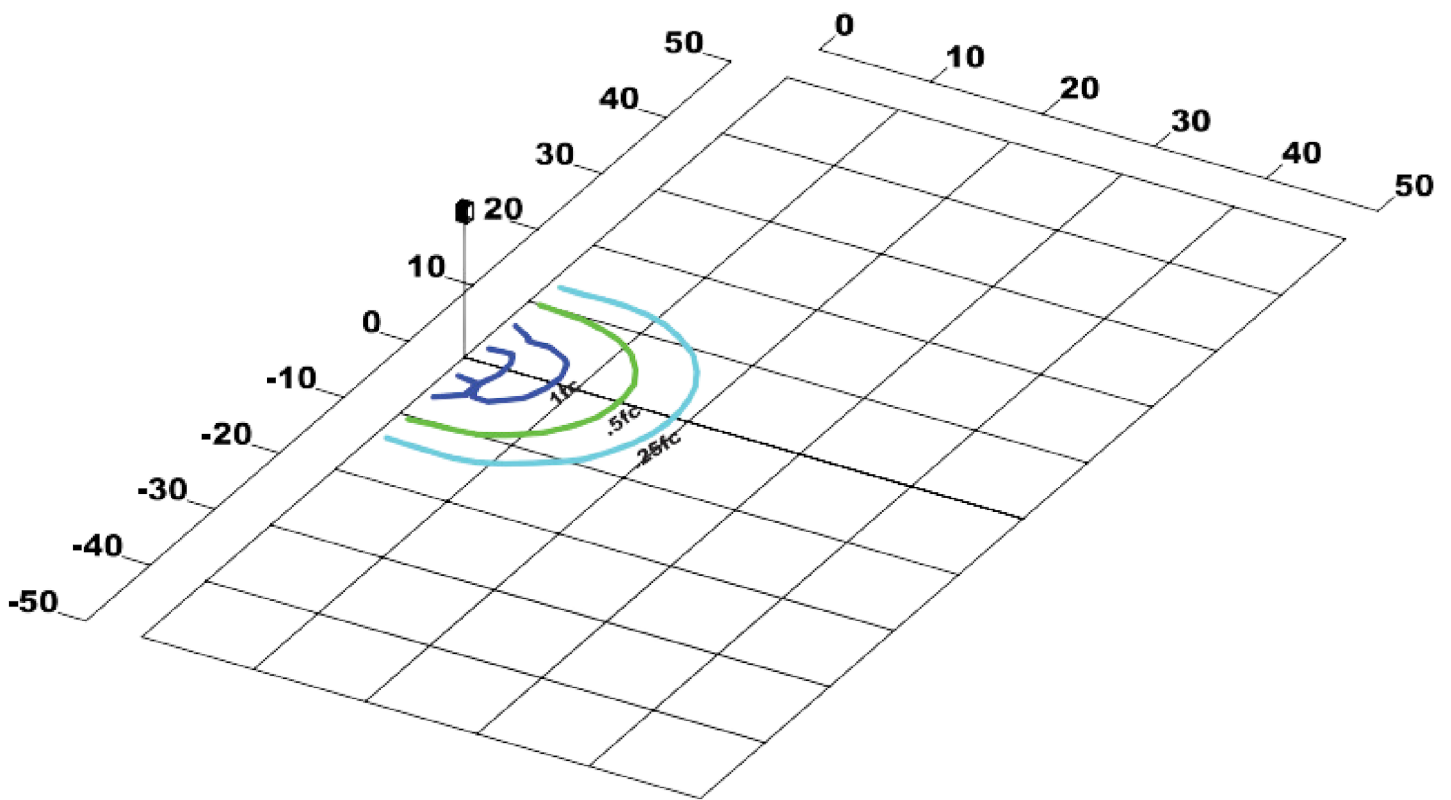

		5000 CCT 80 CRI				
Input Watts	Optics	Lumens	LPW	B	U	G
9	Type IV	679	75	0	3	1

