


SPEC SHEET

SHOK

LED Wall Pack

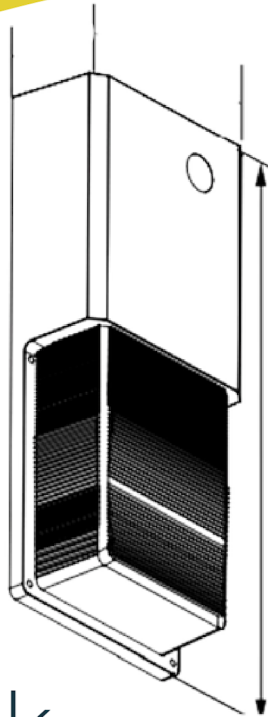

AccessFixtures.com

1 Optics:
This unit features clear polycarbonate prismatic lens that provides optically controlled wide spread light distribution.

2 Value:
Featuring cost-efficient high-performance LEDs that deliver a total of 1,054 lumens, and L70 rated life of 165,000 hours.

3 Photocell:
Built-in photocell automatically detects dusk and dawn and turns this wall pack on or off accordingly – adding extra savings in energy costs!

highlights



Width (D) | 5¹/₈" (135mm)
Length (B) | 2¹/₂" (64mm)
Height (A) | 12¹/₄" (311mm)



PH: 800-468-9925
Sales@AccessFixtures.com
AccessFixtures.com



AccessFixtures
High-Performance Lighting Solutions



SHOK FEATURES

| | |
|---------------------------|--|
| System Watts | 10w |
| Light Source | Alumnium Boards |
| Kelvin | 5000K |
| Available Finishes | Bronze, Custom RAL |
| Finish | Polycarbonate Front Housing in Bronze with White Powdercoat Finish Back Plate. |
| Lens | Standard Clear Polycarbonate Prismatic Lens |
| Optic | Type IV |
| Listings | IP65 rated |
| Product Family | SHOK |
| Rated Life | L70 @ 165,000 hours |
| Voltage | 120-277v |
| Warranty | 5-Year Limited Warranty |
| Mounting Options | Cast-in Template for Mounting Directly Over a 4" Recessed Outlet Box, or Use 1/2" Surface Conduit. |
| Housing | Stamped Galvanized Back Plate with White Powdercoat Finish |
| Photocell | Photocell Adaptable |


OPTIONS

- Photocell adaptable
- Motion sensor
- Single or Double fuse
- Bronze or Custom RAL





SHOK PHOTOMETRIC DATA

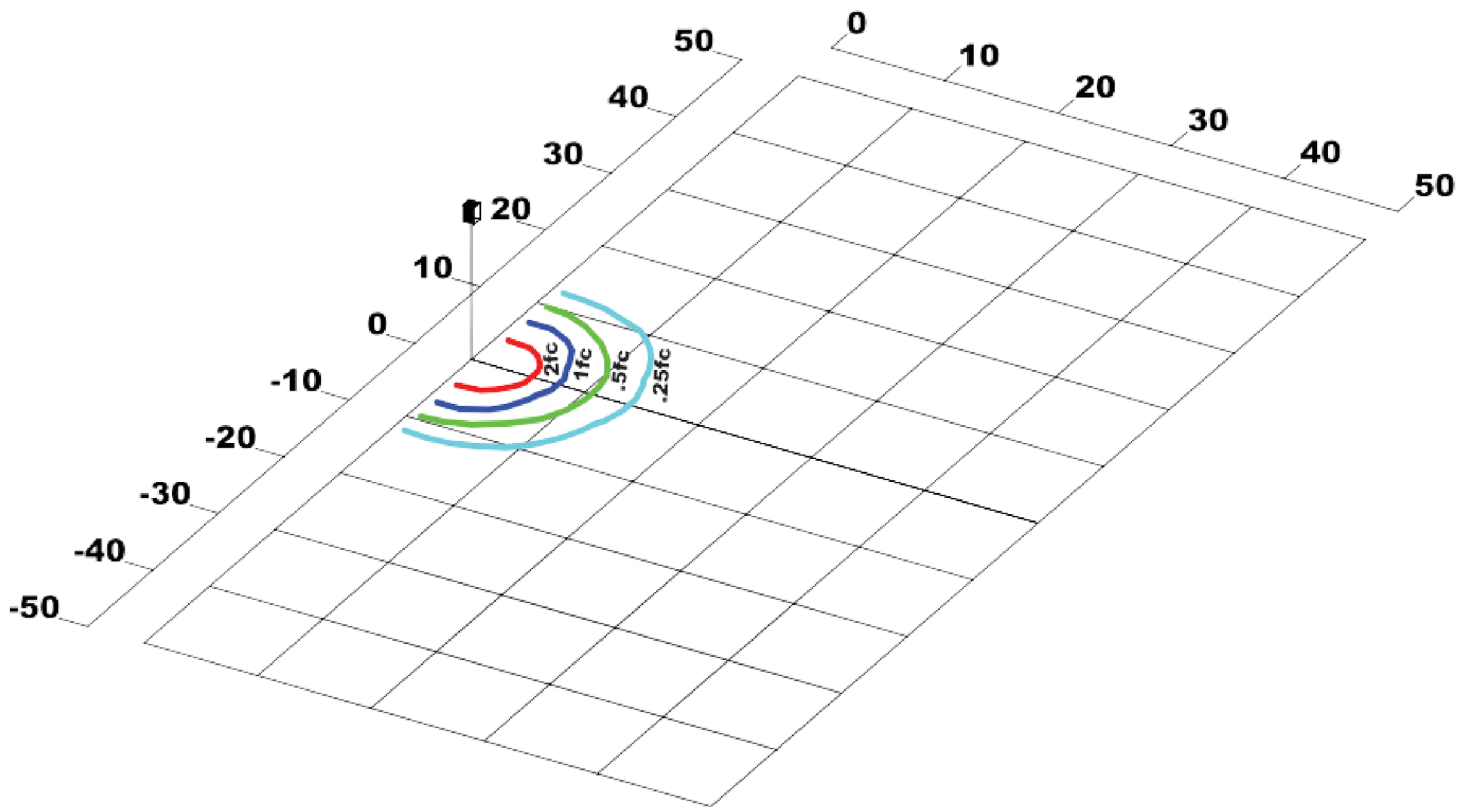

Grid in MH
MH=10 Feet

| | | 5000 CCT 80 CRI | | | | |
|-------------|---------|-----------------|-----|---|---|---|
| Input Watts | Optics | Lumens | LPW | B | U | G |
| 10 | Type IV | 780 | 78 | 0 | 3 | 1 |

