

## SPEC SHEET



# HEZE

## LED Wall Pack

[AccessFixtures.com](http://AccessFixtures.com)

1

### Full Cutoff:

The full cutoff design of this wall pack helps to meet local lighting ordinances by minimizing light trespass – also making it neighbor and dark-sky friend

2

### EXTREME-LIFE:

L70 rated life of 213,000 hours. This means that after 213,000 hours this fixture will still deliver 70% or more of its initial lumens – making it virtually maintenance-free.

3

### Durable Construction:


This HEZE wall pack fixture is made of die-cast aluminum and IP65 rated against water and dust.

highlights



### Dimensions

Width (D)	14¼" (362mm)
Length (B)	11½" (289mm)
Height (A)	9½" (232mm)



PH: 800-468-9925

[Sales@AccessFixtures.com](mailto:Sales@AccessFixtures.com)

[AccessFixtures.com](http://AccessFixtures.com)



**AccessFixtures**  
High-Performance Lighting Solutions

<b>Light Source</b>	LED
<b>Kelvin</b>	4000K, 5000K
<b>Watts</b>	54w
<b>Available Finishes</b>	Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request
<b>Housing</b>	Die Cast Hinged and Gasketed Aluminum Front Frame and Housing with ½" Coin Plugs. Nickel-Plated Stainless Steel Hardware
<b>BUG Rating</b>	Type III: 1, 2, 1 / Type V: 2, 2, 0
<b>Mounting</b>	Cast-in Template for Mounting Directly Over a 4" Recessed Outlet Box, or Use ½" Surface Conduit
<b>Lumens</b>	Up to 3,982
<b>LPW</b>	97
<b>Lens</b>	Tempered clear flat glass lens or tempered clear flat prismatic glass lens
<b>Driver</b>	Electronic Driver, 120-277V, 50/60Hz
<b>Dimensions</b>	11.375" L x 14.25" W x 9.125" H
<b>Listings</b>	CSA, IP65, ANSI/UL
<b>Voltage</b>	120-277v
<b>Photocell</b>	Photocell Adaptable
<b>Warranty</b>	5-year limited warranty




# AccessFixtures

High-Performance Lighting Solutions


## HEZE OPTIONS

### OPTIONS

- 4000K, 5000K
- Optics: Type III or Type V
- 20KA Surge Protection
- 90min Emergency battery backup
- Tempered Clear Flat Glass Lens or Tempered Clear Flat Prismatic Glass Lens.

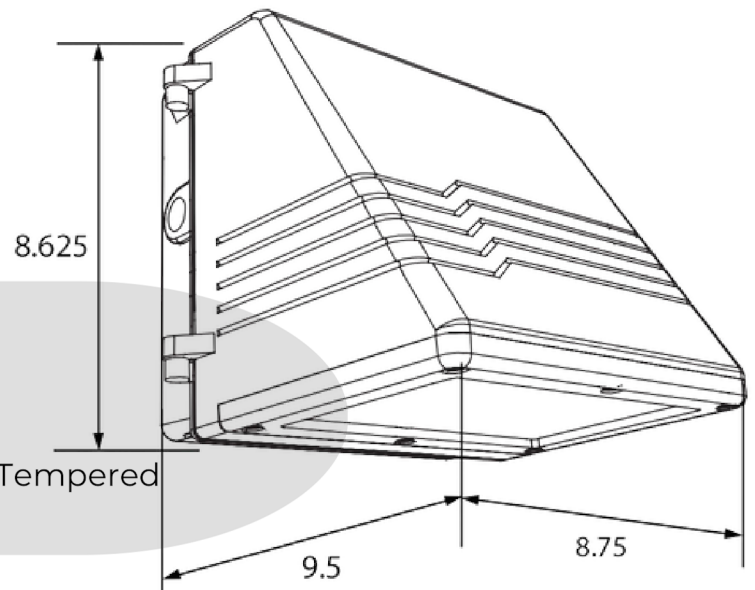

## PHOTOMETRICS

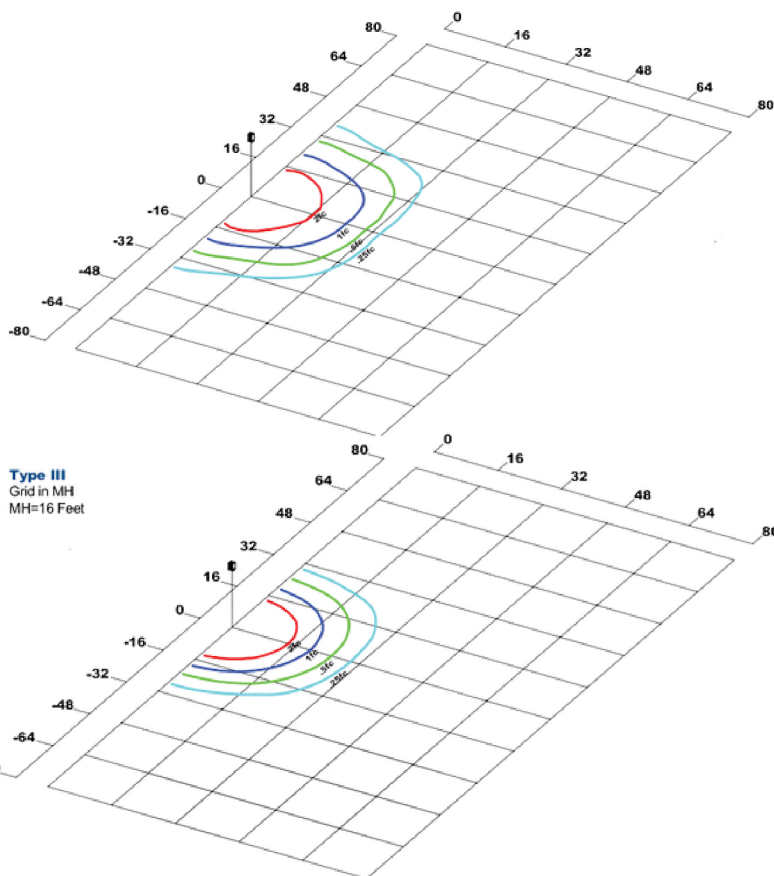

Type III  
Grid in MH  
MH=16 Feet

Type V  
Grid in MH  
MH=16 Feet

PH: 800-468-9925

Sales@AccessFixtures.com

AccessFixtures.com



# AccessFixtures

High-Performance Lighting Solutions