



(IF)



(SE)



This photometric report will be generated using methods recommended by the Illuminating Engineering Society of North America (IESNA). The calculations in this report will be based on data provided by a third party. The accuracy of this photometric report is dependent on the accuracy of the data provided. Enduser environment and application (including, but not limited to voltage variation and dirt accumulation) can cause actual photometric performance to differ from the performance calculated using the data provided. This report will be provided without warranty as to accuracy, completeness, reliability, or otherwise. In no event will Access Fixtures be responsible for any loss resulting from any use of this report.

CARO 100 T3 at 15'

Partner for Contact:
Order No.:
Company:
Customer No.:

Date: 07 / 16 / 2020
Operator:

Access Fixtures
40 Jackson St. Worcester, MA

Operator
Telephone 800-468-9925
Fax
e-Mail Sales@AccessFixtures.com

Table of contents

CARO 100 T3 at 15'	
Project Cover	1
Table of contents	2
Luminaire parts list	3
Access Fixtures CARO 100 T3 AF55XLED-6098A100UNV850T3 Outdoor Pole/...	
Luminaire Data Sheet	4
Exterior Scene 1	
Luminaires (coordinates list)	5
Exterior Surfaces	
Walkway	
Isolines (E, Perpendicular)	6
Greyscale (E, Perpendicular)	7
Value Chart (E, Perpendicular)	8


Access Fixtures
40 Jackson St. Worcester, MA

Operator
Telephone 800-468-9925
Fax
e-Mail Sales@AccessFixtures.com

CARO 100 T3 at 15' / Luminaire parts list

2 Pieces Access Fixtures CARO 100 T3 AF55XLED-6098A100UNV850T3 Outdoor Pole/Arm-Mounted Area Luminaires
Article No.: CARO 100 T3 AF55XLED-6098A100UNV850T3
Luminous flux (Luminaire): 12942 lm
Luminous flux (Lamps): 12947 lm
Luminaire Wattage: 100.1 W
Luminaire classification according to CIE: 100
CIE flux code: 37 72 94 100 100
Fitting: 1 x User defined (Correction Factor 1.000).

See our luminaire catalog for an image of the luminaire.




Access Fixtures
40 Jackson St. Worcester, MA

Operator
Telephone 800-468-9925
Fax
e-Mail Sales@AccessFixtures.com

Access Fixtures CARO 100 T3 AF55XLED-6098A100UNV850T3 Outdoor Pole/Arm-Mounted Area Luminaires / Luminaire Data Sheet

Luminous emittance 1:

See our luminaire catalog for an image of the luminaire.

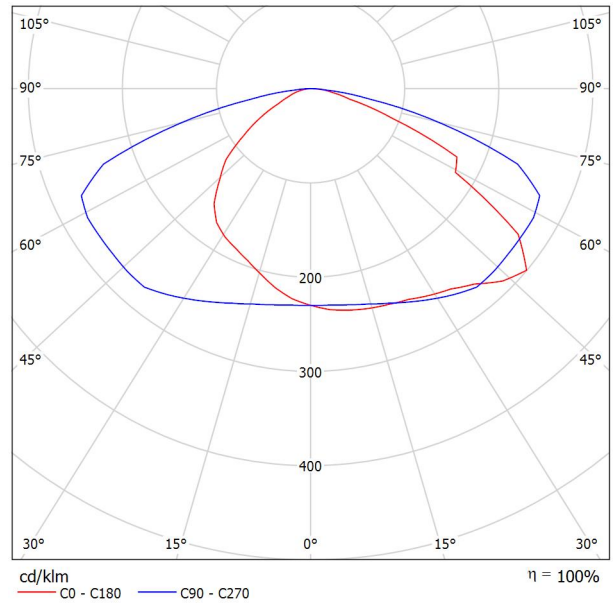

Luminaire classification according to CIE: 100
CIE flux code: 37 72 94 100 100

Due to missing symmetry properties, no UGR table can be displayed for this luminaire.

Access Fixtures
40 Jackson St. Worcester, MA

Operator
Telephone 800-468-9925
Fax
e-Mail Sales@AccessFixtures.com

Exterior Scene 1 / Luminaires (coordinates list)

Access Fixtures CARO 100 T3 AF55XLED-6098A100UNV850T3 Outdoor Pole/Arm-Mounted Area Luminaires

12942 lm, 100.1 W, 1 x 1 x User defined (Correction Factor 1.000).



①


②

No.	Position [ft]			Rotation [°]		
	X	Y	Z	X	Y	Z
1	0.000	-4.000	15.000	0.0	0.0	90.0
2	82.000	-4.000	15.000	0.0	0.0	90.0

Access Fixtures
40 Jackson St. Worcester, MA


Operator
Telephone 800-468-9925
Fax
e-Mail Sales@AccessFixtures.com

Exterior Scene 1 / Walkway / Isolines (E, Perpendicular)

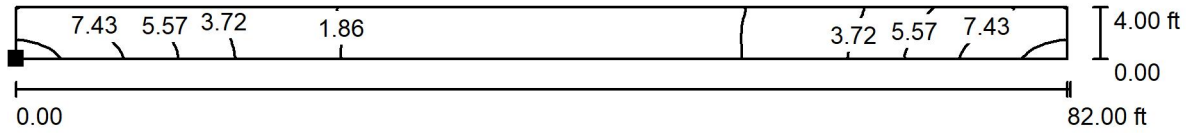

Values in Footcandles, Scale 1 : 179

Position of surface in external scene:
Marked point:
(0.000 ft, 0.000 ft, 0.000 ft)



Grid: 128 x 16 Points


E_{av} [fc]	E_{min} [fc]	E_{max} [fc]	u0	E_{min} / E_{max}
3.79	1.00	9.92	0.264	0.101



Access Fixtures
40 Jackson St. Worcester, MA

Operator
Telephone 800-468-9925
Fax
e-Mail Sales@AccessFixtures.com

Exterior Scene 1 / Walkway / Greyscale (E, Perpendicular)

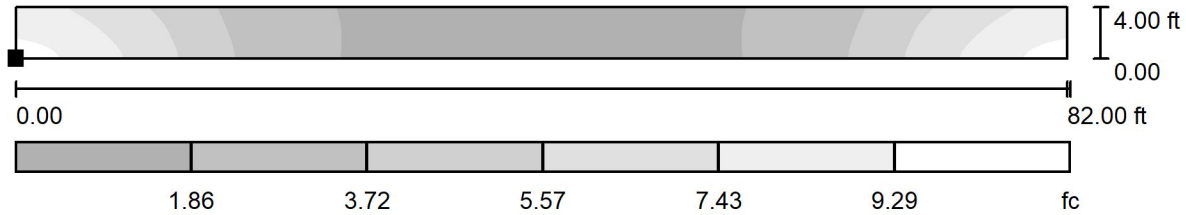

Scale 1 : 179

Position of surface in external scene:
Marked point:
(0.000 ft, 0.000 ft, 0.000 ft)




Grid: 128 x 16 Points

E_{av} [fc]	E_{min} [fc]	E_{max} [fc]	$u0$	E_{min} / E_{max}
3.79	1.00	9.92	0.264	0.101

Access Fixtures
40 Jackson St. Worcester, MA

Operator
Telephone 800-468-9925
Fax
e-Mail Sales@AccessFixtures.com


Exterior Scene 1 / Walkway / Value Chart (E, Perpendicular)

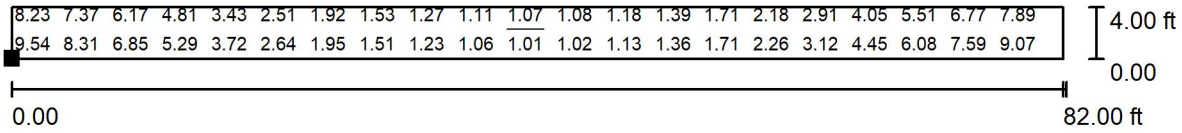

Values in Footcandles, Scale 1 : 179

Not all calculated values could be displayed.

Position of surface in external scene:
Marked point:
(0.000 ft, 0.000 ft, 0.000 ft)



Grid: 128 x 16 Points

E_{av} [fc]	E_{min} [fc]	E_{max} [fc]	u0	E_{min} / E_{max}
3.79	1.00	9.92	0.264	0.101