

SPEC  
SHEET

# CIRF

## LED Wall Packs

BULKHEAD, GRID FRAME



AccessFixtures.com

### 1 EXTREME-LIFE:

CIRF features an impressive L70 rated life of 187,000 hours. This means that after 187,000 hours, this fixture will still emit 70% or greater of its original lumens. That's almost 22 years of sustained light!

### 2 Vandal-Resistant:

Durable die-cast aluminum housing construction with a vandal-resistant stabilized polycarbonate opal lens for durability, resistance, and the elimination of hot spots

### 3 IP66 Rated:


CIRF is fully protected against water jets, making this wall pack an ideal solution for any application where dust or water may be a concern

highlights



#### Dimensions

Diameter (D) 12 1/2" (318mm)  
Height (A) 4 5/8" (111mm)

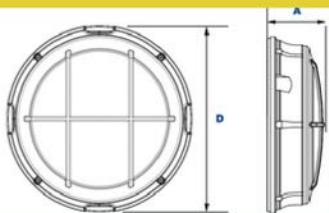

PH: 800-468-9925

Sales@AccessFixtures.com

AccessFixtures.com



AccessFixtures  
High-Performance Lighting Solutions

## CIRF FEATURES

Light Source	Aluminum Board
Kelvin	3000K, 4000K, 5000K
Available Finishes	Bronze, White, Custom RAL
Housing	Die-cast aluminum
Optic	Type V
Lens	UV-stabilized polycarbonate opal vandal-resistant
Listings	IP66 Rated
BUG Rating	1, 1, 0
Rated Life	L70 @ 187,000
Product Family	CIRF
Voltage	120-277v
Mounting	Surface Mount
Photocell	Photocell Adaptable
Warranty	5-year limited warranty




# AccessFixtures

High-Performance Lighting Solutions

## CIRF FEATURES

### OPTIONS

- 3000K, 4000K, 5000K
- Bronze, White or Custom RAL
- Backup Battery
- Photocell
- Motion Sensor
- Surge Protector

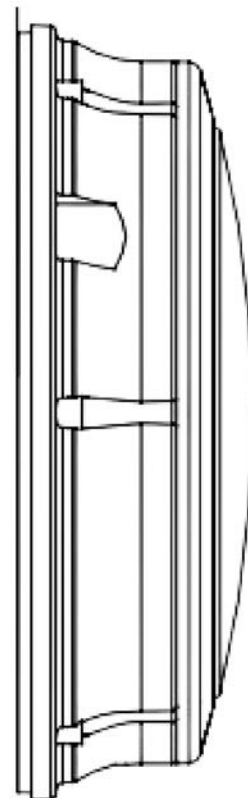







# AccessFixtures

High-Performance Lighting Solutions

## CIRF PHOTOMETRIC DATA

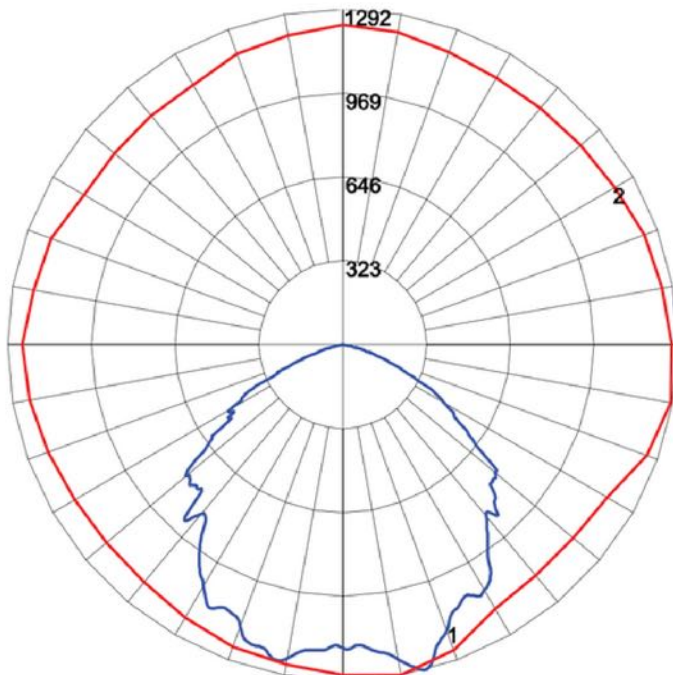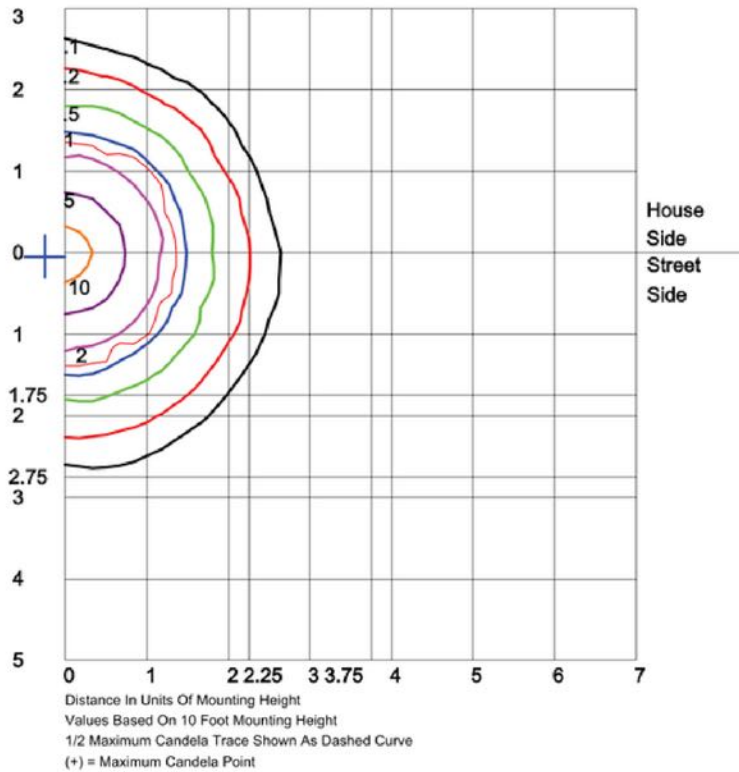

Maximum Candela = 1292.42 Located At Horizontal Angle = 280, Vertical Angle = 14.5  
# 1 - Vertical Plane Through Horizontal Angles (280 - 100) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (14.5) (Through Max. Cd.)

PH: 800-468-9925  
Sales@AccessFixtures.com  
AccessFixtures.com



# AccessFixtures

High-Performance Lighting Solutions