

SPEC
SHEET

CIRL

LED Wall Packs

BULKHEAD, OPEN-FRAME

AccessFixtures.com



1 EXTREME-LIFE:

CIRL features an impressive L70 rated life of 187,000 hours. This means that after 187,000 hours, this fixture will still emit 70% or greater of its original lumens. That's almost 22 years of sustained light!


2 Vandal-Resistant:

Durable die-cast aluminum housing construction with a vandal-resistant stabilized polycarbonate opal lens for durability, resistance, and the elimination of hot spots

3 IP66 Rated:

CIRL is fully protected against water jets, making this wall pack an ideal solution for any application where dust or water may be a concern

highlights

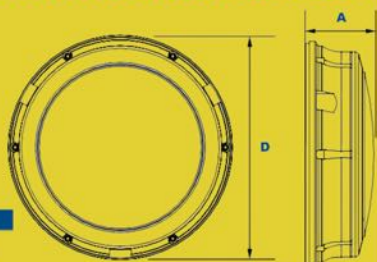

Dimensions

Diameter (D)	12 1/2" (318mm)
Height (A)	3 1/2" (100mm)

PH: 800-468-9925

Sales@AccessFixtures.com

AccessFixtures.com



AccessFixtures
High-Performance Lighting Solutions


CIRL FEATURES

Light Source	Aluminum Board
Kelvin	3000K, 4000K, 5000K
Available Finishes	Bronze, White, Custom RAL
Housing	Die-cast aluminum
Optic	Type V
Lens	UV-stabilized polycarbonate opal vandal-resistant
Listings	IP66 Rated
BUG Rating	1, 1, 0
Rated Life	L70 @ 187,000
Product Family	CIRL
Voltage	120-277v
Mounting	Surface Mount
Photocell	Photocell Adaptable
Warranty	5-year limited warranty

CIRL FEATURES

OPTIONS

- 3000K, 4000K, 5000K
- Bronze, White or Custom RAL
- Backup Battery
- Photocell
- Motion Sensor
- Surge Protector

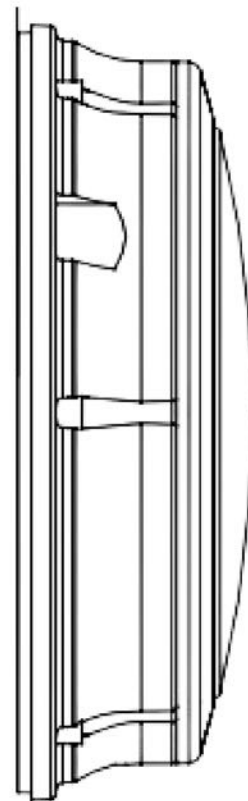



AccessFixtures

High-Performance Lighting Solutions

CIRL PHOTOMETRIC DATA

