

SPEC SHEET



SARC

LED Wall Packs

BULKHEAD, GRID FRAME

AccessFixtures.com

1 EXTREME-LIFE:

SARC features an impressive L70 rated life of 187,000 hours. This means that after 187,000 hours, this fixture will still emit 70% or greater of its original lumens. That's almost 22 years of sustained light!


2 Vandal-Resistant:

Durable die-cast aluminum housing construction with a vandal-resistant stabilized polycarbonate opal lens for durability, resistance, and the elimination of hot spots

3 IP66 Rated:

SARC is fully protected against water jets, making this wall pack an ideal solution for any application where dust or water may be a concern

highlights



Dimensions

Width (D)	12 1/4" (318mm)
Length (B)	12 1/4" (318mm)
Height (A)	3 3/8" (100mm)

PH: 800-468-9925

Sales@AccessFixtures.com

AccessFixtures.com



AccessFixtures

High-Performance Lighting Solutions



SARC FEATURES

Light Source	Aluminum Boards
Kelvin	3000K, 4000K, 5000K
Available Finishes	Bronze, White, Custom RAL
Housing	Die-cast gasketed aluminum
Optic	Type V
Photocell	Photocell Adaptable
Lens	UV-stabilized polycarbonate opal vandal-resistant
Rated Life	L70 @ 187,000
Listings	IP66 Rated
Product Family	SARC
Voltage	120-277v, 347v (12w only) 347-480v (27w only)
Mounting	Surface Mount
Warranty	5-year limited warranty






AccessFixtures

High-Performance Lighting Solutions

SARC FEATURES

OPTIONS

- 3000K, 4000K, 5000K
- Bronze, White or Custom RAL
- Backup Battery
- Photocell
- Motion Sensor
- Surge Protector

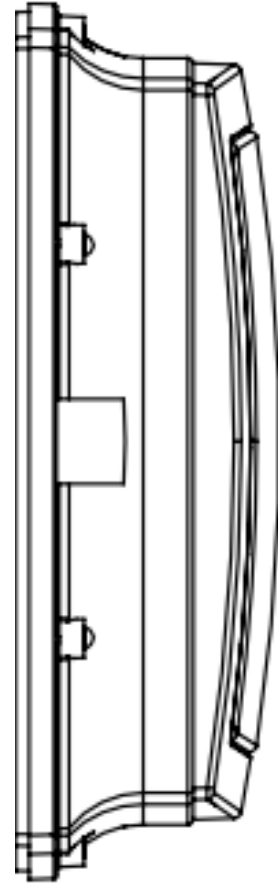


PH: 800-468-9925
Sales@AccessFixtures.com
AccessFixtures.com




AccessFixtures
High-Performance Lighting Solutions

SARC PHOTOMETRIC DATA

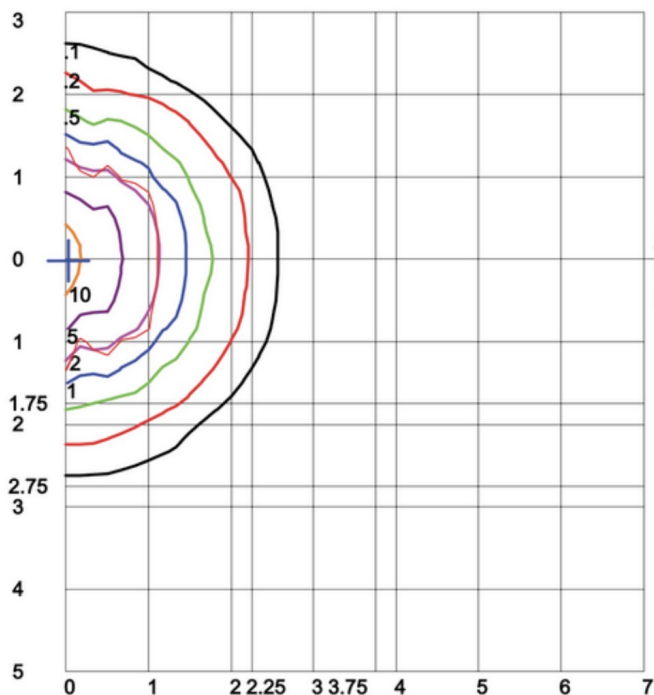

Distance In Units Of Mounting Height
 Values Based On 10 Foot Mounting Height
 1/2 Maximum Candela Trace Shown As Dashed Curve
 (+) = Maximum Candela Point

House
Side
Street
Side

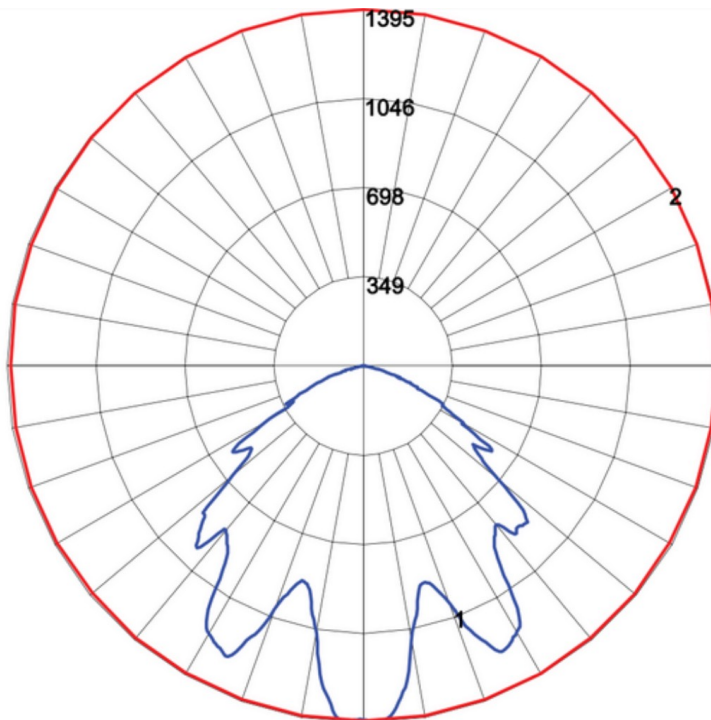

Maximum Candela = 1395.031 Located At Horizontal Angle = 60, Vertical Angle = 2
 # 1 - Vertical Plane Through Horizontal Angles (60 - 240) (Through Max. Cd.)
 # 2 - Horizontal Cone Through Vertical Angle (2) (Through Max. Cd.)

		Wattage (Catalog Logic)	12W (1X12)	17W (1X17)	25W (1X25)
Input Watts			12.9W	18.1W	27.1W
F = Type V	Optic	CCT	Delivered Lumens		
		3000K	1,313	1,838	2,757
		4000K	1,424	1,994	2,990
		5000K	1,483	2,077	3,115
		BUG Rating	B1-U1-G0	B1-U1-G0	B1-U1-G0