

SPEC
SHEET

SARC

LED Wall Packs

BULKHEAD, OPEN FRAME



AccessFixtures.com

1 EXTREME-LIFE:

SARC features an impressive L70 rated life of 187,000 hours. This means that after 187,000 hours, this fixture will still emit 70% or greater of its original lumens. That's almost 22 years of sustained light!

2 Vandal-Resistant:

Durable die-cast aluminum housing construction with a vandal-resistant stabilized polycarbonate opal lens for durability, resistance, and the elimination of hot spots

3 IP66 Rated:


SARC is fully protected against water jets, making this wall pack an ideal solution for any application where dust or water may be a concern

highlights



Dimensions

Width (D)	12 1/2" (318mm)
Length (B)	12 1/2" (318mm)
Height (A)	3 9/16" (100mm)

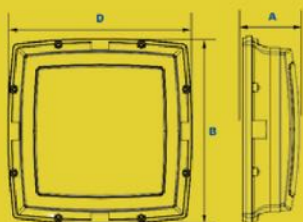

PH: 800-468-9925

Sales@AccessFixtures.com

AccessFixtures.com



AccessFixtures
High-Performance Lighting Solutions

SARC FEATURES

Light Source	Aluminum Boards
Kelvin	3000K, 4000K, 5000K
Available Finishes	Bronze, White, Custom RAL
Housing	Die-cast gasketed aluminum
Optic	Type V
Photocell	Photocell Adaptable
Lens	UV-stabilized polycarbonate opal vandal-resistant
Rated Life	L70 @ 187,000
Listings	IP66 Rated
Product Family	SARC
Voltage	120-277v, 347v (12w only) 347-480v (27w only)
Mounting	Surface Mount
Warranty	5-year limited warranty




AccessFixtures

High-Performance Lighting Solutions

SARC FEATURES

OPTIONS

- 3000K, 4000K, 5000K
- Bronze, White or Custom RAL
- Backup Battery
- Photocell
- Motion Sensor
- Surge Protector


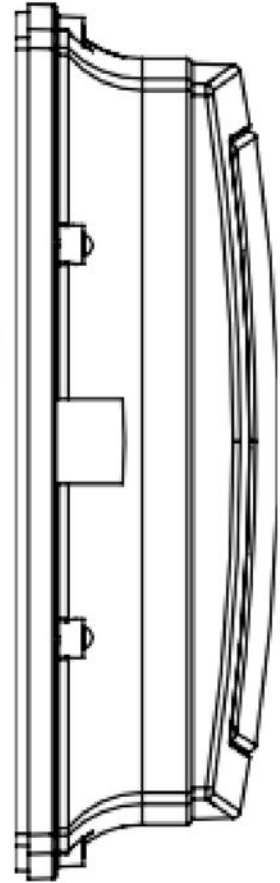




AccessFixtures

High-Performance Lighting Solutions

SARC PHOTOMETRIC DATA

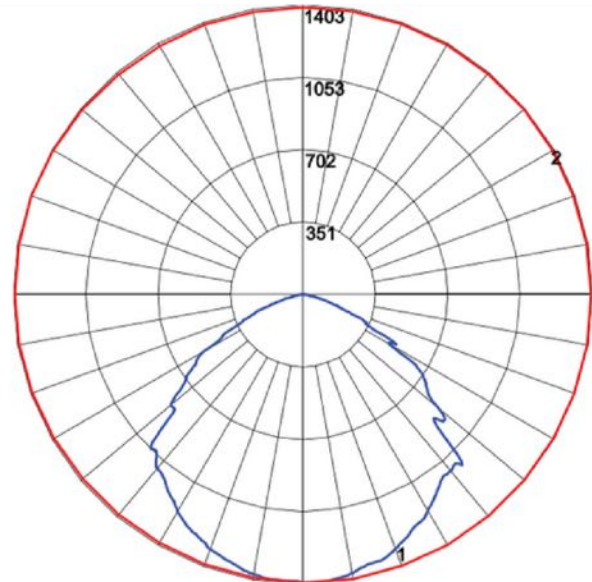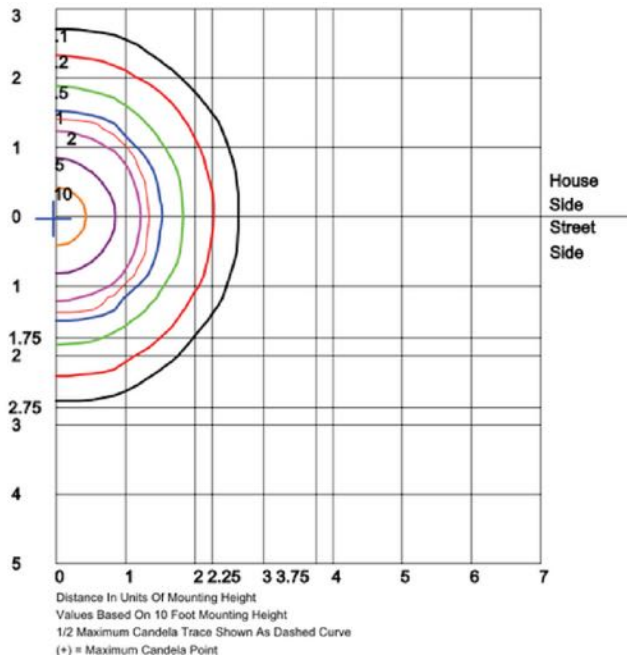

Maximum Candela = 1403.39 Located At Horizontal Angle = 300, Vertical Angle = 3
1 - Vertical Plane Through Horizontal Angles (300 - 120) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (3) (Through Max. Cd.)

Wattage (Catalog Logic)		12W (1X12)	17W (1X17)	25W (1X25)
Input Watts		12.9W	18.1W	27.1W
Optic	CCT	Delivered Lumens		
F = Type V	3000K	1,545	2,163	3,245
	4000K	1,676	2,347	3,520
	5000K	1,746	2,444	3,667
	BUG Rating	B1-U1-G0	B1-U1-G0	B2-U1-G0

