


POTO

L70
25°C

133,000 Hours

Wall Pack with Photocell

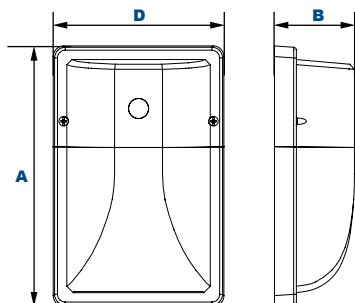

Dimensions

Width (D)	5¼" (136mm)
Length (B)	2½" (64mm)
Height (A)	8¼" (207mm)

- Integrated photocell is included
- Broad no glare light distribution
- L70 @ 133,000 hours **EXTREME LIFE**

Specifications and Features:

Housing:

Die Cast Back Plate with White Powdercoat Finish. Molded UV-Stabilized Polycarbonate Front Housing. 120-277V Photocell Included.

Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750; IP65 Sealed LED Compartment. ADA Compliant.

Finish:

UV-Stabilized Polycarbonate Front Housing in Black with White Powdercoat Finish Back Plate.

Lens:

UV-Stabilized Polycarbonate Opal Diffuser Lens is Vandal-Resistant and Eliminates LED Hot Spots

Mounting Options:

Mount Directly Over a 4" Recessed Outlet Box.

Extreme Life LED:

Aluminum Boards

Wattage:

Array: 11w; System: 13.8w; (70w HID Equivalent)

Driver:

Electronic Driver, 120-277V, 50/60Hz, Non-Dimmable

Controls:

Factory-Installed Photocell is Internally Wired for Switching Within the Housing. Fixtures are Tested with Factory Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

Warranty:

5-Year Warranty for -40°C to +40°C Environment.

BUG Rating: 0, 3, 2

Order Information Example:

AF33XWP7QF1X11U5KLB

POTO	F	1X11	U		L	B
Model	Optics	Wattage	Driver	CCT	Lens	Color
WP7Q = LED Polycarbonate Entry Light	F=Type IV	1X11=11w	U=120-277V	4K=4000K 5K=5000K	L = Opal UV-Stabilized Polycarbonate Outer Conical Lens	B=Black

Project Information:


Project Name:	Fixture Type:
Complete Catalog #:	Date:
Comments:	

Certification & Listings:



Specifications subject to change without notice. Rev. 021920

Photometric Data

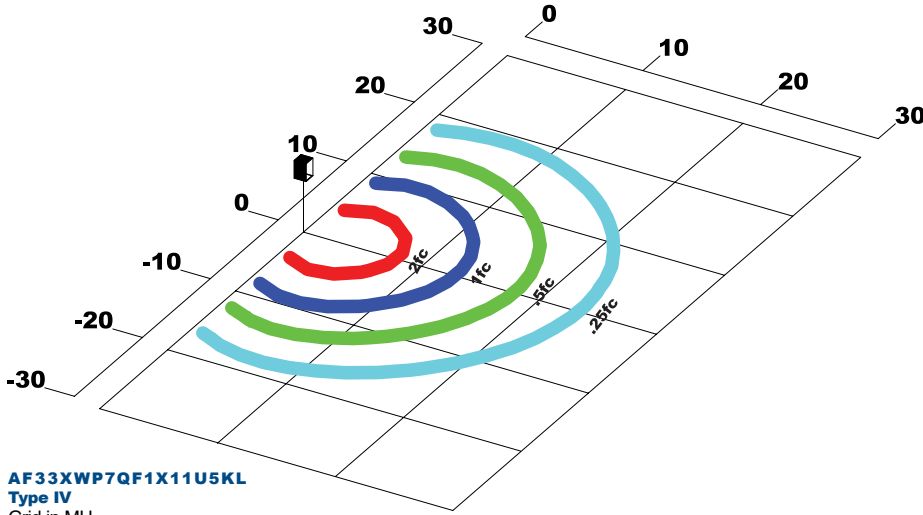

AF33XWP7QF1X11U5KL
 Type IV
 Grid in MH
 MH=10 Feet

Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	Optics	5000 CCT 80 CRI			
				Lumens	B	U	G
LED 11w	170	14	Type IV	1490	0	3	2