

SPEC SHEET



VAEL

VAPOR TIGHT WATTAGE/ CCT SELECTABLE LINEAR FIXTURE

AccessFixtures.com

1

Prismatic Diffuser Lens: This fixture includes a prismatic diffuser that maximizes light distribution and reduces glare.


2

Selectable Kelvin and Wattage*: Get the exact Kelvin and the amount of light that you want with the flick of a smart controller switch. It's 0-10v dimmable too.

3

Durable and Waterproof: This fixture is IP65 rated and UL, CuL, RoHS, and DLC listed for wet locations.

highlights

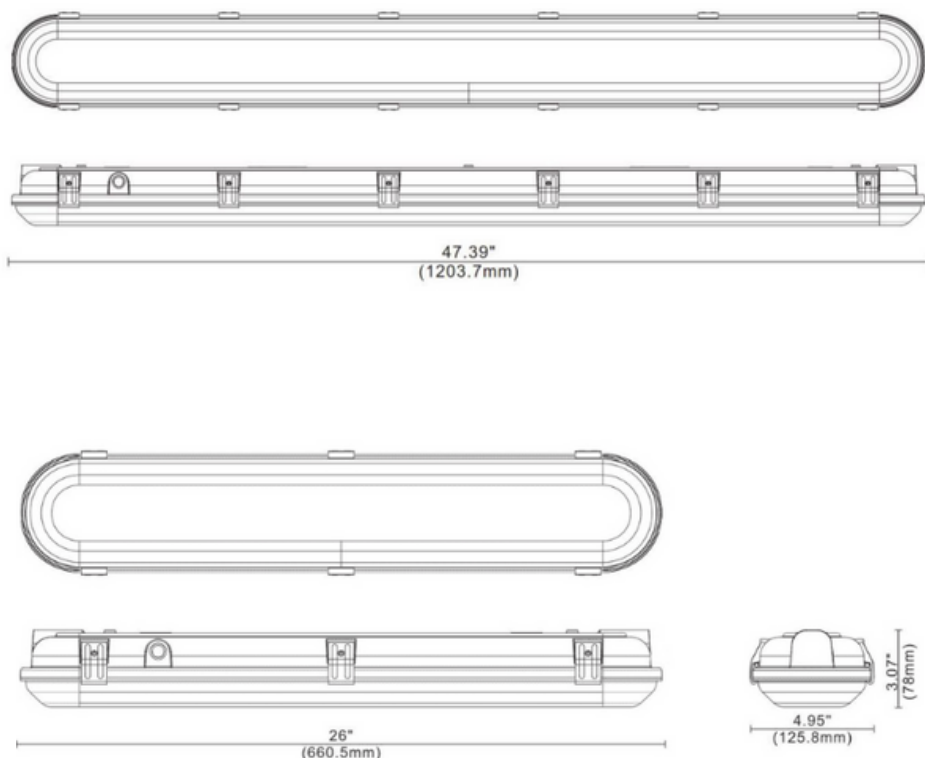

SPECIFICATIONS

| VAEL | AF55XVL2-23/345K | AF55XVL4V35/345K | AF55XVL4V60/345K |
|-----------------------|------------------------|------------------------|------------------------|
| Wattage | 23W (Only) | 35/26/17W | 57/45/30W |
| Lumens | 3,423 | 5,323 | 8,920 |
| Luminous Efficacy | 154 lm/w | 153 lm/w | 158 lm/w |
| Weight | 4 lbs | 7.9 lbs | 7.9 lbs |
| Dimensions | 26" X 4.95" X 3.07" | 47.39" X 4.95" X 3.07" | 47.39" X 4.95" X 3.07" |
| Finish | White | White | White |
| CRI | 80+ | 80+ | 80+ |
| CCT | 3000K, 4000K, 5000K | 3000K, 4000K, 5000K | 3000K, 4000K, 5000K |
| Housing | Polycarbonate | Polycarbonate | Polycarbonate |
| Lens | Polycarbonate Diffuser | Polycarbonate Diffuser | Polycarbonate Diffuser |
| LED Type | LED Array | LED Array | LED Array |
| Mount | Metal Strap | Metal Strap | Metal Strap |
| Rated Life | L70 @ 54,000 Hours | L70 @ 54,000 Hours | L70 @ 54,000 Hours |
| Voltage | 120-277v | 120-277v | 120-277v |
| Dimmable | 0-10v Dimming | 0-10v Dimming | 0-10v Dimming |
| Operating Temperature | -40°C to 40°C | -40°C to 40°C | -40°C to 40°C |
| Wet Location Rated | IP65 | IP65 | IP65 |
| Listings | UL, CuL, DLC, RoHS | UL, CuL, DLC, RoHS | UL, CuL, DLC, RoHS |
| Warranty | 5 Years | 5 Years | 5 Years |

FEATURES

OPTIONS

- Selectable Kelvin: 3000K,/4000K/5000K
- Selectable Wattage*: 23w, 35/26/17w, 57/45/30w
- Metal Strap Mount
- 1-10v dimming
- Battery Backup
- 10KV Surge Protection
- External Motion Sensor
- Ra80+