

SPEC SHEET

# OPPE

LED Bollard Light



AccessFixtures.com

## Durable Construction:

- 1 This bollard light comes equipped with a durable extruded aluminum exterior, vandal-resistant screws, and is CSA & IP66 rated against water and dust.

## EXTREME-LIFE:

- 2 EXTREME-LIFE rated L70 @ 187,000 hours for years of reliable performance.

## Choice of Lens::

- 3 With OPPE you can choose from a clear UV-stabilized polycarbonate or upgrade to a no-glare Opal UV-stabilized polycarbonate vandal-resistant lens

highlights



PH: 800-468-9925  
Sales@AccessFixtures.com  
AccessFixtures.com



AccessFixtures  
High-Performance Lighting Solutions



# AccessFixtures

High-Performance Lighting Solutions

## OPPE OPTIONS

<b>Light Source</b>	LED
<b>Kelvin</b>	4000k, 5000k
<b>Watts</b>	18w, 25w, 37w
<b>Available Finishes</b>	Bronze, Black, Custom RAL
<b>Housing</b>	Extruded Aluminum Housing
<b>Mounting</b>	Mounting Kit with 8' Zinc-Plated Anchor Bolts, Included.
<b>Lumens</b>	Up to 3,263
<b>Height</b>	7" or custom height available
<b>Lens</b>	Clear UV-Stabilized Polycarbonate or Opal UV-Stabilized
<b>Driver</b>	Electronic Driver, 120-277V or 347-480v, 50/60Hz
<b>Finish</b>	Textured Bronze or Black Powdercoat Finish Over a Chromate Conversion Coating
<b>Listings</b>	CSA, IP66, ANSI/UL 1598, 8750;
<b>Voltage</b>	120-277v, 347-480v
<b>Warranty</b>	5-year limited warranty






# AccessFixtures

High-Performance Lighting Solutions



## OPPE OPTIONS

### OPTIONS

- Choice of Kelvin - 3000K or 4000K
- Choice of Lens - clear shatter-resistant polycarbonate or opal shatter-resistant polycarbonate
- Choice of height - Standard 34 3/4" height or 30" height
- Choice of Finish - Black, bronze, and custom RAL colors available upon request
- Add surge protection or a GCFI outlet
- Choice of shipping anchor bolts ahead of time or with bollard light

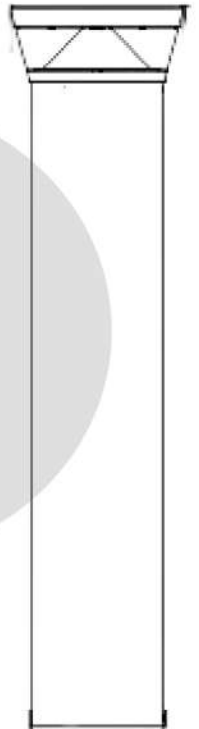

## PHOTOMETRIC DATA

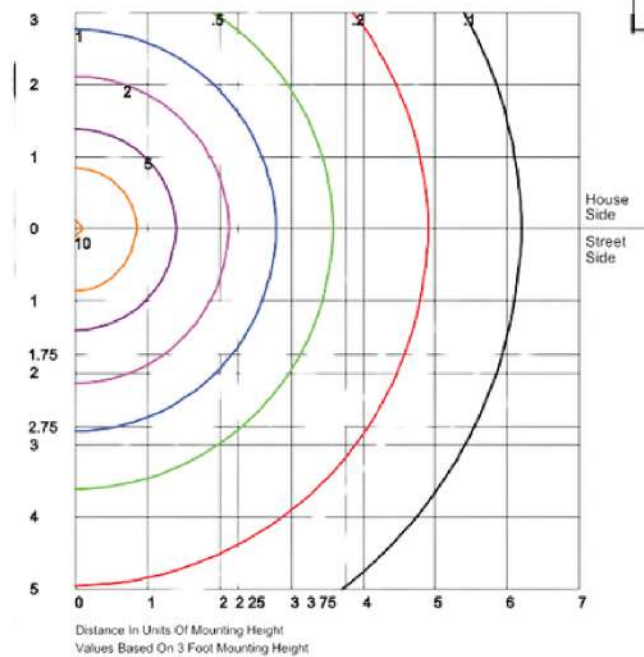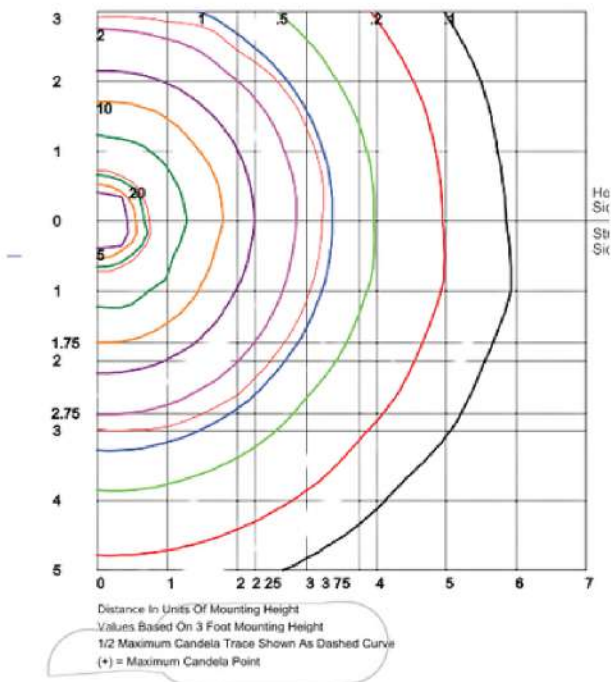



# Ordering Information

**Example: AF33XB1Q-F-1X23-U-3K-C-Z-30-SF**

Model	Optics/Beam	Wattage	Driver	CCT	Lens	Color	Height	Options
<b>AF33XB1Q</b> = Round Bollard Flat Top <b>AF33XB1BQ</b> = Round Bollard, Dome Top <b>AF33XB2Q</b> = Square Bollard, Flat Top <b>AF33XB2CQ</b> = Square Bollard, Pyramid Top	<b>F</b> =Wide Beam Spread	<b>1x16</b> = 18w <b>1x23</b> = 25w <b>1x34</b> = 37w	<b>U</b> = 120-277v <b>C</b> = 347* <b>H</b> = 347-480 ◆  <b>*23w Model Only</b> <b>◆34w Model Only</b>	<b>3K</b> =3000K <b>4K</b> =4000K	<b>C</b> =Clear UV- Stabilized Polycarbonate Vandal- Resistant Lens <b>L</b> =SoftLED LumaLens Opal UV- Stabilized Polycarbonate Vandal- Resistant Lens	<b>B</b> =Black <b>Z</b> =Bronze <b>C</b> =Custom	<b>30</b> =30" height <b>(Leave Blank)</b> = 34 3/4" Standard Height	<b>SF</b> =Single Fuse* <b>DF</b> =Double Fuse* <b>SP</b> =Surge Protection <b>GFI</b> =GFCI outlet, 15A, 120v <b>SF</b> =Microwave Sensor with Dimming & Remote Programming, 120- 277V Only. <b>BU</b> =Battery Backup, 90 Minutes* <b>BUC</b> =Cold Start Battery Backup, -20°C, 90 Minutes*

**\*120-277v models only**

