

SPEC SHEET



ARCI

LED BOLLARD LIGHT

AccessFixtures.com

1 EXTREME-LIFE:

ARCI is L70 rated at 120,000 hours, ensuring years of maintenance-free life.

2


Durable: ARCI is IP66-rated with a die-cast aluminum head which protects a horizontally mounted shatterproof polycarbonate lens.

3

Marine Grade Finish:

This bollard light is standard with a marine-grade finish for extra protection.

highlights

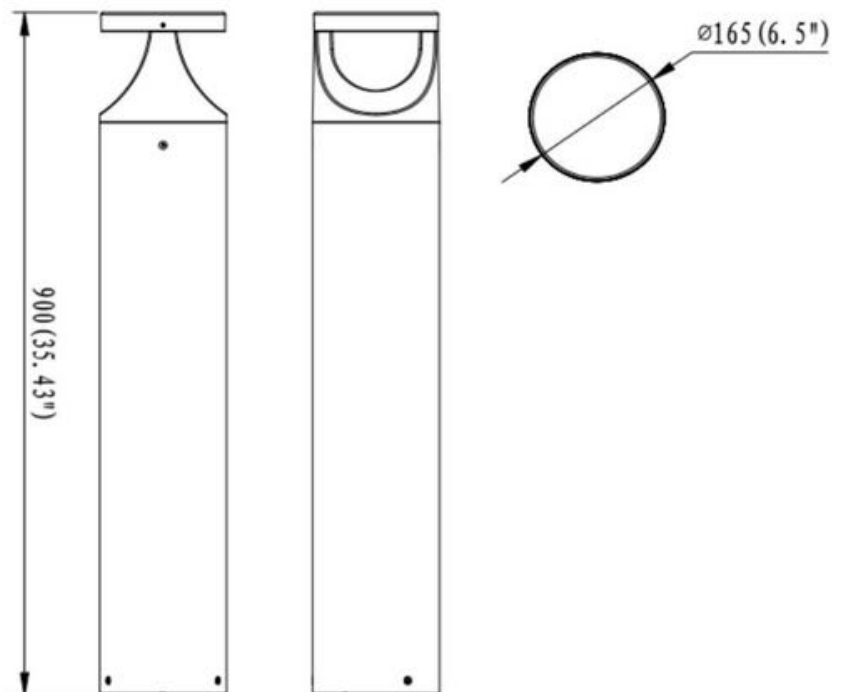

PH: 800-468-9925
Sales@AccessFixtures.com
AccessFixtures.com



AccessFixtures
High-Performance Lighting Solutions



AccessFixtures

High-Performance Lighting Solutions

ARCI FEATURES

System Watts	14w	24w
Finish	Black	Black
Kelvin Temperature	3000K/4000K/5000K	3000K/4000K/5000K
Housing	Die-cast aluminum	Die-cast aluminum
Lens	Polycarbonate	Polycarbonate
LED Type	LED Array	LED Array
Lumens	1,190	1,920
BUG Rating	0, 0, 0	0, 0, 0
Weight	13 lbs	17 lbs
Height	19.6" / 36" / 43"	19.6" / 36" / 43"
Diameter	6.5"	6.5"
Rated Life	L70 @ 120,000 Hrs	L70 @ 120,000 Hrs
Voltage	120-277v	120-277v
Dimmable	Yes	Yes
Operating Temp	-22°F to 122°F	-22°F to 122°F
Wet Location Rated	IP66	IP66
Listings	UL, CuL, DLC, ETL, RoHS, CB, SAA listed	UL, CuL, DLC, ETL, RoHS, CB, SAA listed
Warranty	5 Years	5 Years

PH: 800-468-9925
Sales@AccessFixtures.com
AccessFixtures.com




AccessFixtures
High-Performance Lighting Solutions




AccessFixtures

High-Performance Lighting Solutions


PHOTOMETRIC ANALYSIS

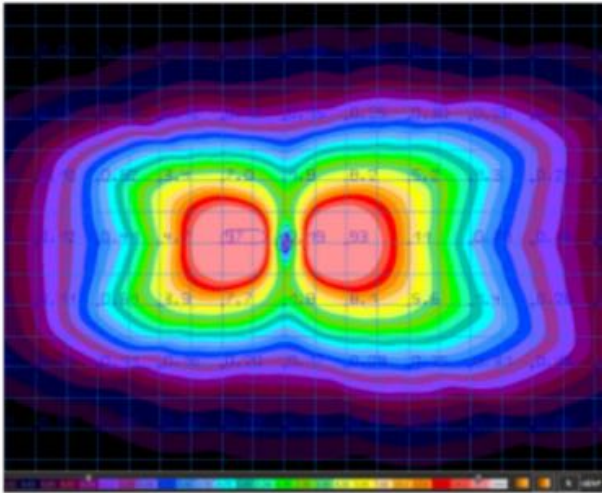


ARCI 14 19.7"
1fc up to 5' / 6' across and 2'6" out

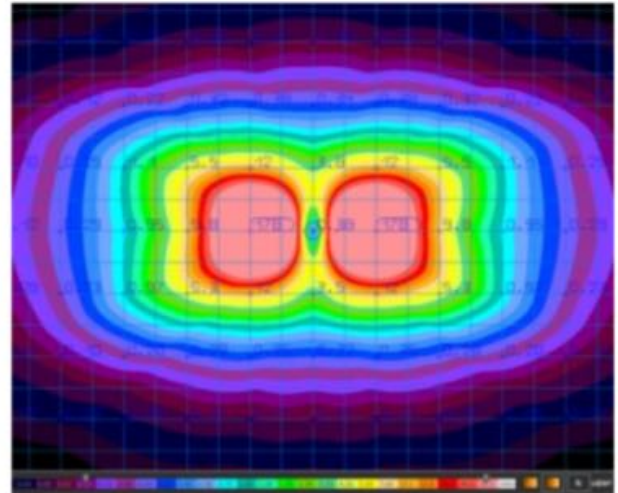

ARCI 24 19.7"
1fc up to 6' across and 3' out

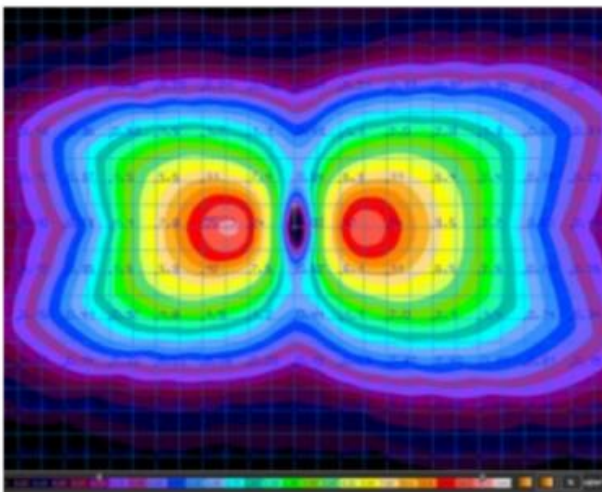

ARCI 14 35.4"
1fc up to 8' / 9'6" across and 4'6" out

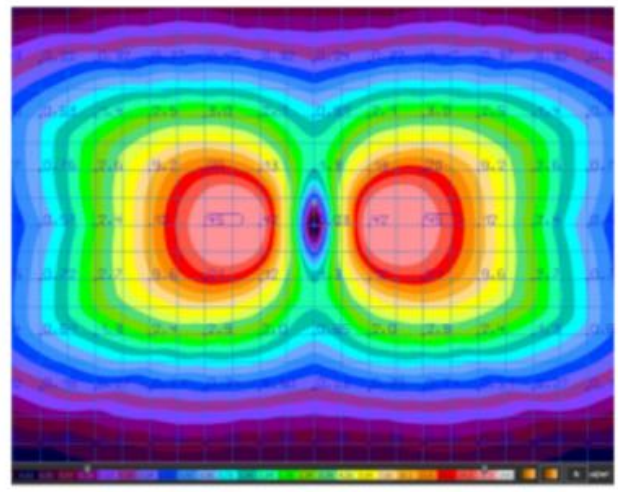

ARCI 24 35.4"
1fc up to 9' across and 5' out



OPTIONS

OPTIONS

- 3000K, 4000K, or 5000K
- Backlight Shield
- Type III, Type IV, or Type V Optics
- Surge Protection
- 19.6" High, 36" High, or 43" High

