

SPEC SHEET



ANGY

LED WALL PACK





AccessFixtures.com

1 Architectural Excellence: Full cutoff optics housed in a Quarter-Sphere architectural housing

2 Low Glare: Glare reduction lens provides superior light distribution while minimizing glare

3 Selectable Wattage: Select 15, 30, 50 or 72 watts for 1,750 to 8,407 lumens with the flick of a switch

highlights

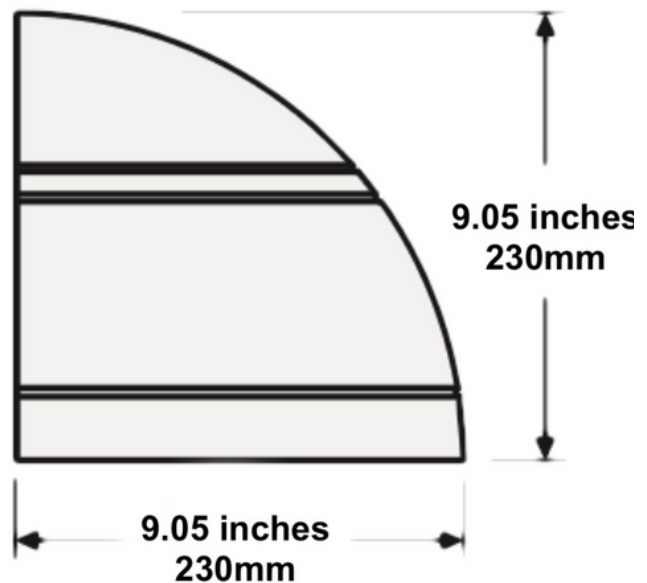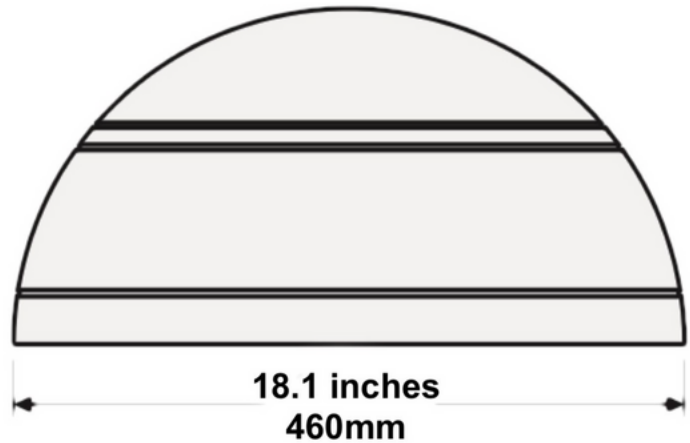

PH: 800-468-9925
Sales@AccessFixtures.com
AccessFixtures.com



AccessFixtures
High-Performance Lighting Solutions



AccessFixtures

High-Performance Lighting Solutions


ANGY FEATURES

Weight	13 Pounds
Finish	8 Stage UV Stabilized Powdercoat finish
Finish Color	Bronze, Custom RAL Optional with MOQ
Color Rendering Index (CRI)	70+ CRI
Optics	Type IV (T4) or Type V (T5)
Color Temperature - Kelvin	3000K, 4000K or 5000K
Housing	Heavy Duty Die-cast Aluminum
Lens	Glare Reduction Lens
LED Type	LED Array
System Watts	Selectable 15/30/50/72
Luminaire Lumens*	1,750 to 8,407
Luminaire Lumens per Watt*	116
Dimensions in Inches	18.1w x 9.05h x 9.05d
Dimensions in mm Without Mount	460w x 230h x 230d
Mounts	Wall Mount
Rated Life	L70 @ 50,000 Hours
Voltage	120-277v
Surge Protection	6kV Standard
Controls	Photocell (optional)
Operating Temperature	-40°C Start
Wet Location Rated	IP65
Listings	DLC, UL, CUL, CE, RoHs
Warranty	5 Years





ANGY OPTICS

Wide Throw

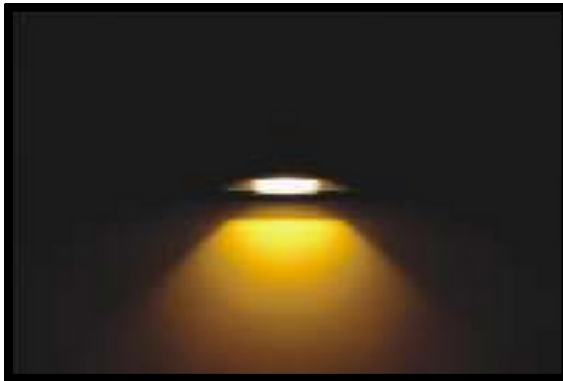

Forward Throw

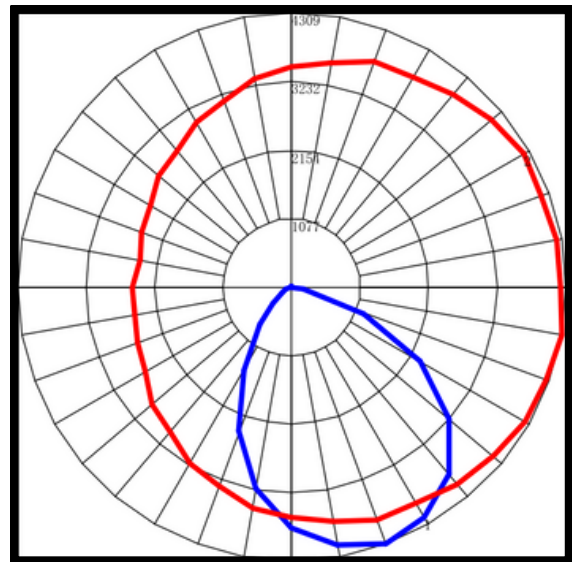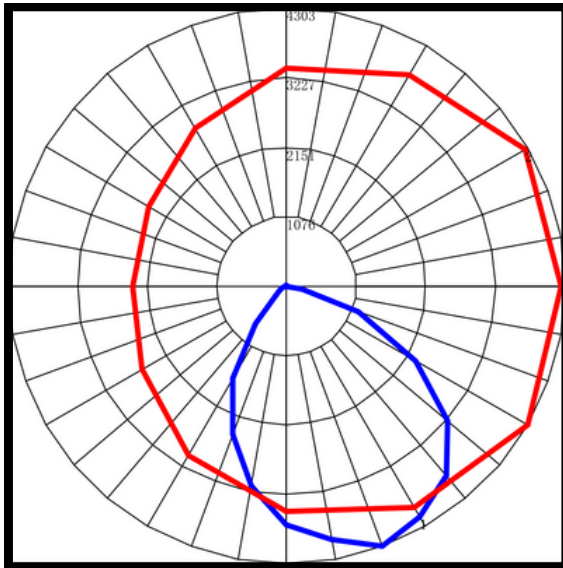

BUG Rating: 3, 2, 1