

SPEC SHEET



BAKO

LED WALL PACK



AccessFixtures.com

1 Architectural Lighting: The up light accentuates the building while the downlight illuminates the walkway

2 Low Glare: Glare reduction lens provides superior light distribution while minimizing glare

3 Select the Optics: Available with T4 wide or T5 forward throw optics for maximum illumination

highlights

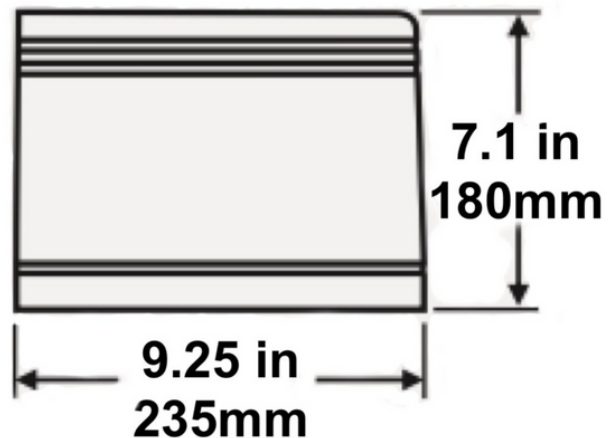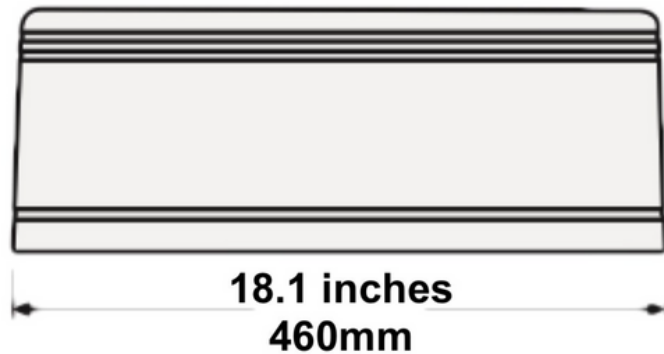

PH: 800-468-9925
Sales@AccessFixtures.com
AccessFixtures.com



AccessFixtures
High-Performance Lighting Solutions



BAKO FEATURES

Weight	16 Pounds
Finish	8 Stage UV Stabilized Powdercoat finish
Finish Color	Bronze, Custom RAL Optional with MOQ
Color Rendering Index (CRI)	70+ CRI
Optics	Type IV (T4) or Type V (T5)
Color Temperature - Kelvin	4000K or 5000K
Housing	Heavy Duty Die-cast Aluminum
Lens	Glare Reduction Lens
LED Type	LED Array
System Watts	40
Luminaire Lumens*	6,056
Luminaire Lumens per Watt*	150
Dimensions in Inches	18.1w x 7.1h x 9.25d
Dimensions in mm Without Mount	460w x 180h x 235d
Mounts	Wall Mount
Rated Life	L70 @ 50,000 Hours
Voltage	120-277v
Surge Protection	6kV Standard
Controls	Photocell (optional)
Operating Temperature	-40°C Start
Wet Location Rated	IP65
Listings	UL, CUL, CE, RoHs
Warranty	5 Years






AccessFixtures

High-Performance Lighting Solutions

BAKO OPTICS

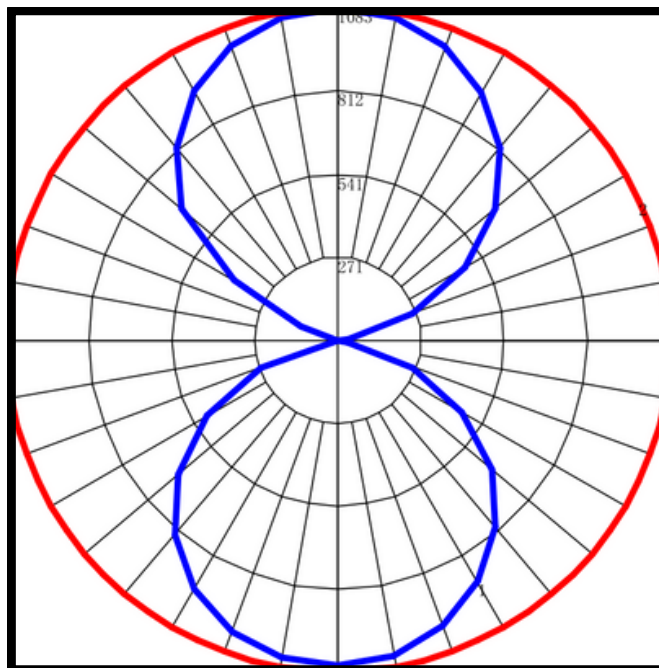

BUG Rating: 1, 5, 1

