

### AccessFixtures.com

#### Selectable Kelvin:

Easily select the Kelvin you want with the flick of a switch ensuring the correct Kelvin for your location

**Type V Optics:** 

LEDs are mounted in the head aimed down and reflect off of the cone reflector for wide 360° light distribution

#### Premium Build:


EXTREME-LIFE L70 @ 153,000 \_ hours, IP66 rated against water jets, and Marine Grade finish for maximum life and durability






# 3 CCT Adjustable

3000K, 4000K, 5000K adjustable



## 4 Power Adjustable

100%, 75%, 50%, 30% adjustable











PH: 800-468-9925 Sales@AccessFixtures.com AccessFixtures.com



**Access**Fixtures High-Performance Lighting Solutions



# **14w ARRI FEATURES**

Weight	18.7 inch: 8.38lbs 42 inch: 12.35lbs
Dimensions	18.7 inch: 5.23"×18.7" 42 inch: 23"×42"
Availability	Typically ships in 3-4 weeks
Light Source	LED
Available Finishes	Black, White, Gray, Bronze
Finish	Power coating
Lens	Polycarbonate optical lens
<b>Light Source Included</b>	LED 3030
Listings	IP66, IK10
Mounting	Mounting kit with anchor bolts
<b>Product Family</b>	ARRI
Rated Life	L70 @ 153,000 Hours
Material	Polycarbonate optical lens Aluminum alloy
System Watts	14w
Voltage	120-277 Vac 50 / 60 Hz
Beam Angle	R06401 (Type V)
Control	Non-dim/Dimmable
CRI	Ra80 (Ra70 optional)
Warranty	5-Year Limited Warranty


PTIONS

- 3000K, 4000K, or 5000K
- 14w or 25w
- 18.7" or 42" height options
- · Ra80 optional
- BUG Rating: 2, 3, 2







### **ARRI PHOTOMETRIC DATA**

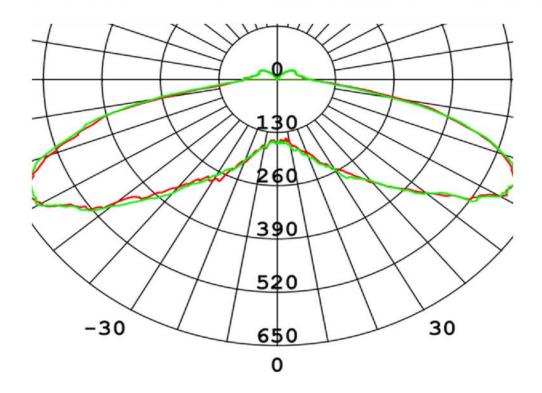

### **Bollard Light - 360°Coverage**




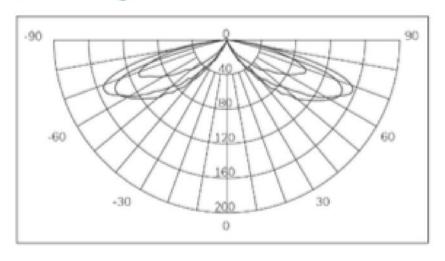






# **ARRI PHOTOMETRIC DATA**

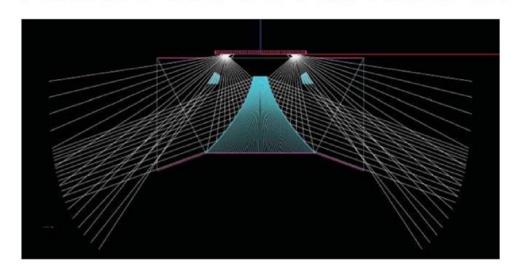

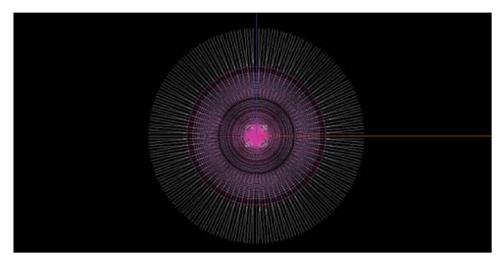



PH: 800-468-9925
Sales@AccessFixtures.com
AccessFixtures.com

