






MANUAL






ARRI

INSTALLATION MANUAL

AccessFixtures.com

Packing List		
	Base plate template	1PCS
	Screw fixing plate	1PCS
	Screw M5*16	4PCS
	Screw M6	3PCS
	Nut M6	3PCS

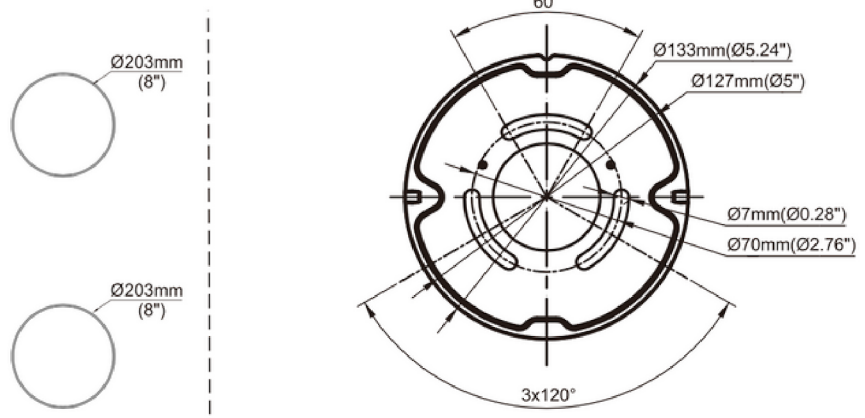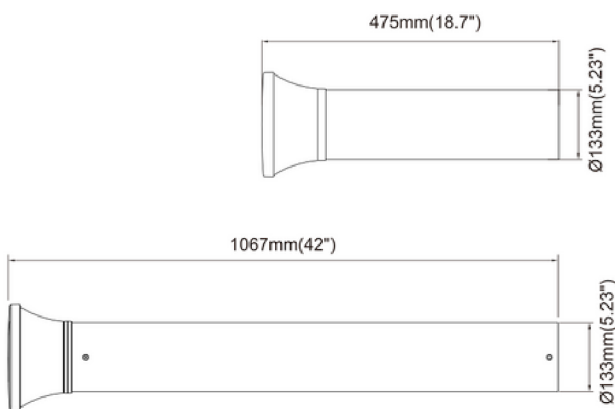




AccessFixtures



High-Performance Lighting Solutions

Installation


①

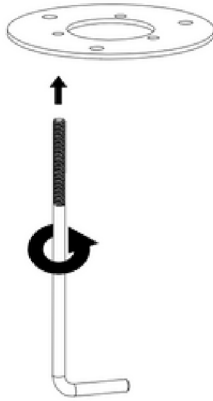


②

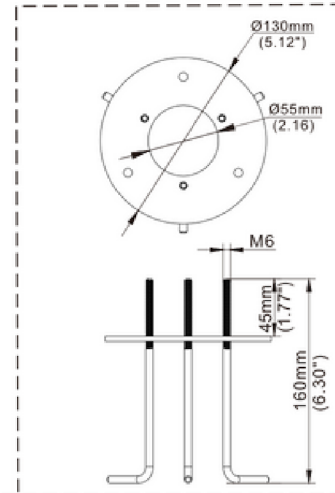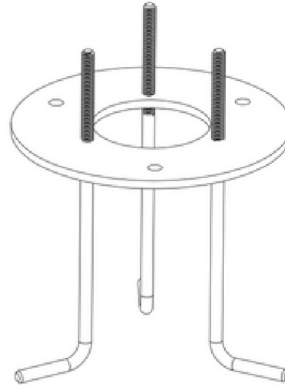



③

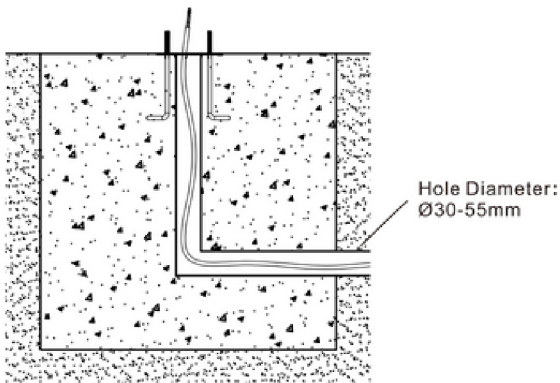


④

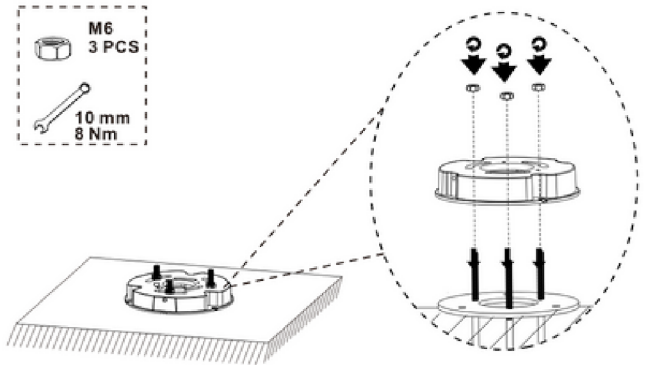

⑤


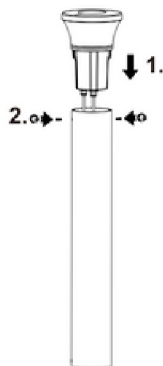


⑥

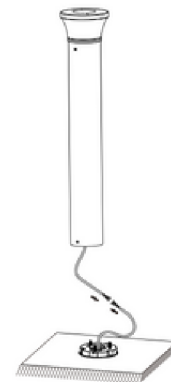


AccessFixtures


High-Performance Lighting Solutions

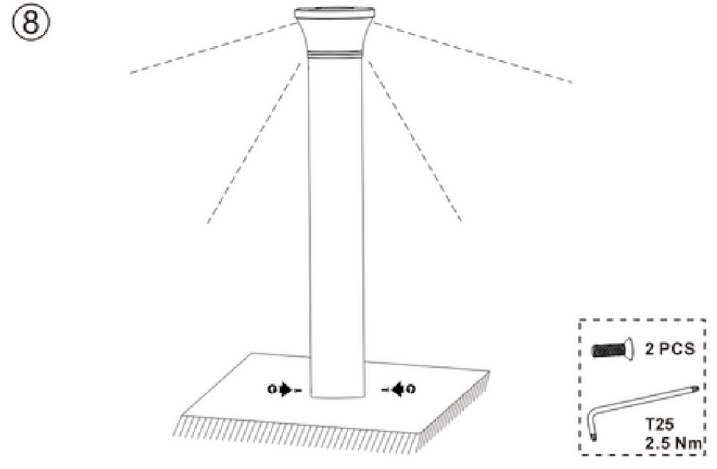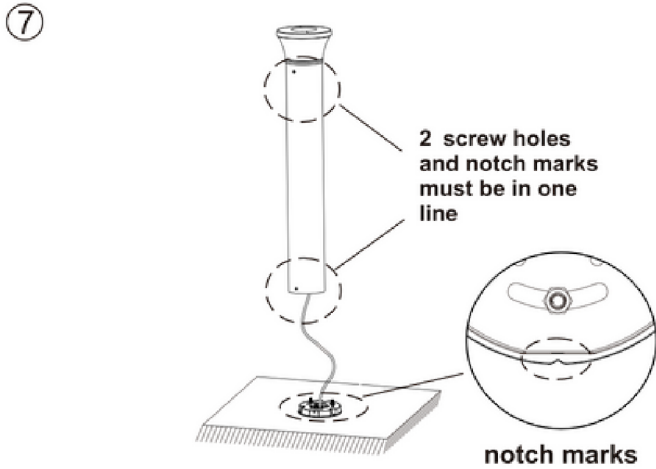

CCT+Power selectable

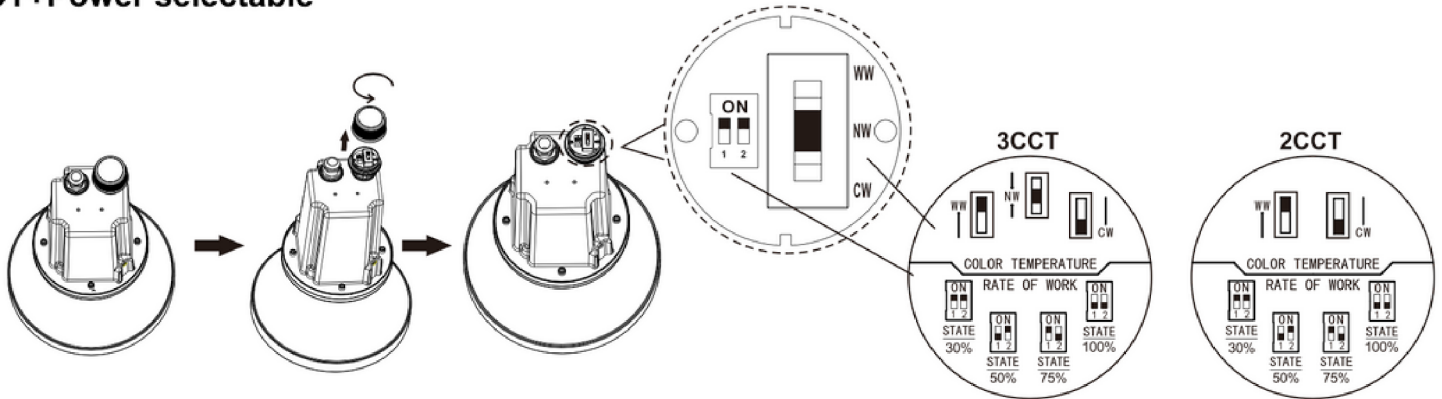

Product Specifications	14W		25W	
Input Voltage	120-277 Vac			
Power Frequency	50 / 60 Hz			
Outlook Dimensions	Ø133x475mm (Ø5.23"x18.70")	Ø133x1067mm (Ø5.23"x42")	Ø133x475mm (Ø5.23"x18.70")	Ø133x1067mm (Ø5.23"x42")
Net Weight	3.8±0.3kg(8.38±0.66Lbs)		5.6±0.3kg(12.35±0.66Lbs)	
Working Temperature	-30°C to +45°C(-22°F to +113°F)			
Storing Temperature	-40°C to +70°C(-40°F to +158°F)			

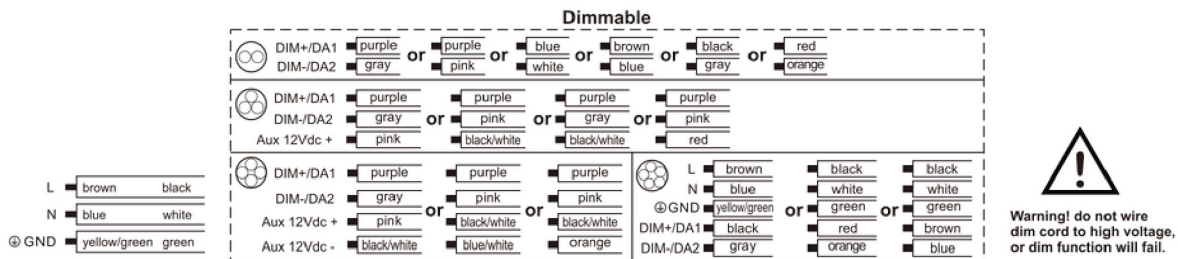

- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- For type Y attachments:
if the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

