

SPEC SHEET



FLOO LED FLOOD LIGHT


AccessFixtures.com

1 Extreme Life:
Rated L70 @ 308,000 hours for years of maintenance-free reliable performance

2 Choice of Mounts:
Knuckle mount or optional slip fitter mount for installation on a ground stake, electrical box, or 2 3/8" O.D. tenon

3 Optics:
Standard with wide flood light optics or 30° narrow optics to provide the light you need where you want it

highlights

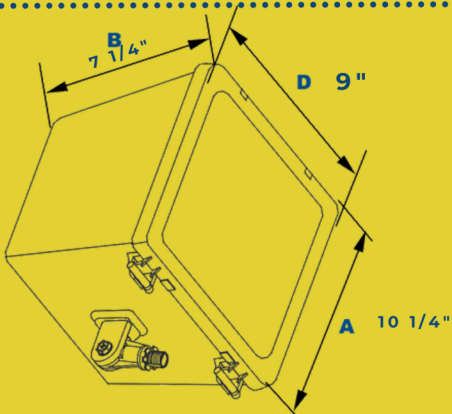

PH: 800-468-9925
Sales@AccessFixtures.com
AccessFixtures.com



AccessFixtures
High-Performance Lighting Solutions




FLOO FEATURES

Dimensions	9" W x 7 1/4" L x 10 1/4" H
Availability	Typically ships in 7-10 business days
Light Source	4,000K, 5000K
Available Finishes	Bronze, custom RAL
Housing	Die-Cast Aluminum Housing & Hinged Gasketed Lens Frame. Nickel-Plated Stainless Steel Hardware
Lens	Tempered Clear Flat Glass Lens
Light Source Included	Aluminum Boards
Light Source Lumens	4,066
Listings	IP65, DLC Listed, CSA
Mounting	Adjustable Knuckle with Angle Indicators & 1/2" NPS Threads or Optional Adjustable Slipfitter with Angle Indicators.
Product Family	FLOO
Rated Life	L70 @ 309,000 Hours
System Watts	41w
Voltage	120-277v, 347-480v
Warranty	5-Year Limited Warranty


OPTIONS

- Textured architectural bronze finish with custom RAL colors available upon request
- Single and double fuse available: 120-277v only
- Optional 347-480v
- Optional narrow 30° Beam Spread
- Optional wire guard, stainless steel, includes hardware
- Optional clear UV-stabilized polycarbonate vandal-resistant guard, includes hardware.

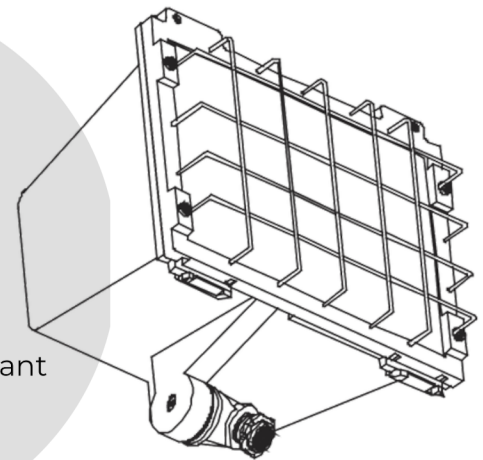




FLOO PHOTOMETRIC DATA

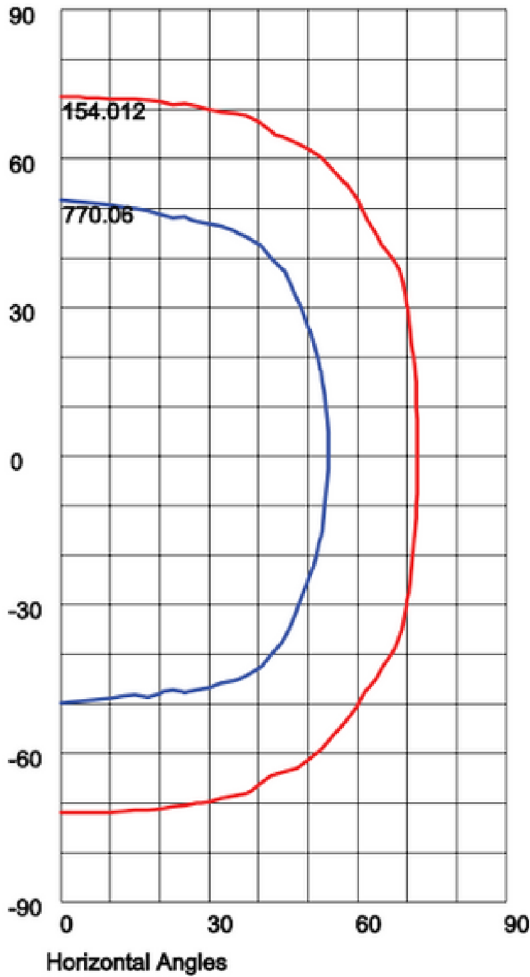

Maximum Candela = 1540.12 Located At Horizontal Angle = 0, Vertical Angle = 1
50% Maximum Candela = 770.06
10% Maximum Candela = 154.012

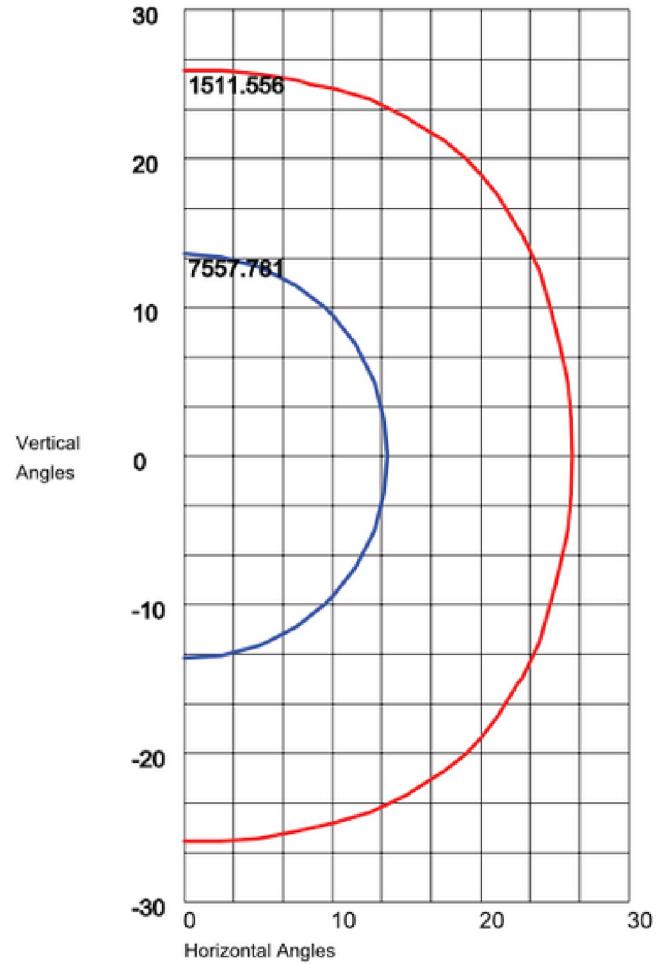

Maximum Candela = 15115.562 Located At Horizontal Angle = 0, Vertical Angle = 1
50% Maximum Candela = 7557.781
10% Maximum Candela = 1511.5562

