

SPEC SHEET



UPTA

LED HIGH BAY LIGHTS

AccessFixtures.com

1

EXTREME-LIFE:

Exceptional heat sink design produces an EXTREME-LIFE rating of L70 @ 200,000 hours for years of virtually maintenance free performance

2

Flawless Light:


Choice of advanced optics, Kelvin, and color rendering of up to Ra>90 facilitates premium anti-glare illumination

3

Maximum Wattage and LPW:

With up to 960 watts per high bay light fixture and lumens per watt of up to 160, UPTAs can provide over 150,000 lumens from a single high bay

highlights

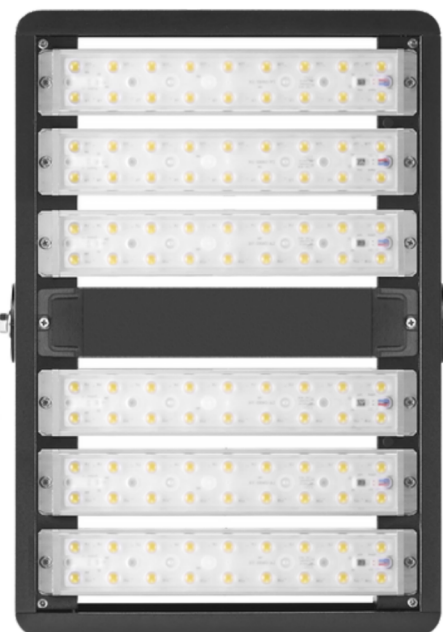

PH: 800-468-9925
Sales@AccessFixtures.com
AccessFixtures.com



AccessFixtures
High-Performance Lighting Solutions

UPTA FEATURES

Weight	11.9-54.6lbs
Dimensions	6.89" - 26.99"
Availability	Typically ships in 3-4 weeks
Light Source	LED Array
Available Finishes	Black, Gray
Finish	High grade aluminum with exceptional heat sink design
Optic	T1S, T5M, T5W, T10D, T20D, T40D, T60D, T90D
Efficiency	Up to 160 LPW
Listings	ETL, CUL, DLC, CE, CB ,SAA, IK10, IP66 Listed
Product Family	UPTA
Rated Life	L70 @ 200,000 hours
System Watts	40w - 960w
Voltage	100-277VAC or 277-480VAC, 50/60Hz
Warranty	5-Year Limited Warranty
CRI	Ra70 [Standard], Ra80, Ra90 [Optional]

OPTIONS


- 3000K, 4000K, 5000K or 5700K
- D type mounting, U type mounting, H type mounting
- 1-10v dimming
- T1S T5M T5W T10D T20D T40D T60D T90D optics
- 10v PWM control
- DALI control/DMX control
- Microwave motion sensor
- Emergency power supply, back light shield, SAC safety cable, additional cable
- Ra80 or Ra90 optional
- Bird spikes



UPTA LED HIGH BAY LIGHTS



D Type Mounting

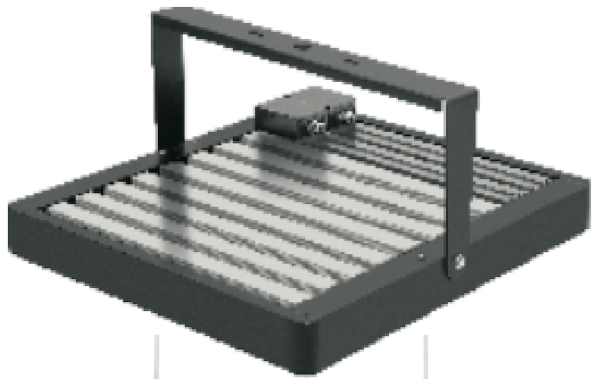

U Type Mounting



H Type Mounting