

SPEC SHEET



Certification #2018-001



CARA

LED Area, Wall & Flood Light

AccessFixtures.com


1 Mounting Options:
Arm-mount, easy-hang wall bracket mount, slip fitter mount, knuckle mounting and more options.

2 FWC Certified:
Emits light in 590 nanometers and comes with full baffle shield for Florida Wildlife Commission certification

3 Premium Build:
EXTREME-LIFE L70 @ 320,000 hours, IP66 against water jets for maximum life, durability, and years of virtually maintenance-free performance



highlights

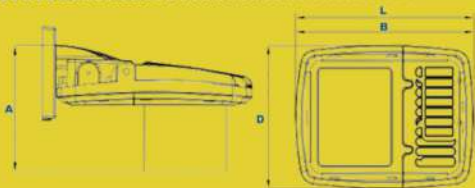

Dimensions

Width (D)	9 5/8" (246mm)
Length (B)	11 1/4" (290mm)
Height (A)	7 1/2" (193mm)

PH: 800-468-9925
Sales@AccessFixtures.com
AccessFixtures.com



AccessFixtures
High-Performance Lighting Solutions



CARA FEATURES

System Watts	22w-256w
Light Source	Alumnum Boards
Kelvin	3000K, 4000K, 5000K, 590nm Amber, FWC Certified
Available Finishes	Bronze, Custom RAL
Finish	Durable corrosion resistant polyester powder coat paint
Optic	Type I, II, III, IV, V, I (narrow beam)
Efficiency	Up to 131 LPW
Listings	IP66 rated
Product Family	CARA
Rated Life	L70 @ 320,000 hours
Voltage	277-480V
Warranty	5-Year Limited Warranty
Mounting Options	Mounts Arm, Adjustable Slipfitter, 2 ³ / ₈ " Diameter Mounting Arm Adapter, Yoke, Two-Piece Bracket or Easy Hang Wall Bracket (Factory Installed)
Housing	Die-cast aluminum housing
Photocell	Photocell Adaptable

OPTIONS

- FWC certified
- Motion sensor
- Photocell adaptable
- Surge protector
- Mounting Options






AccessFixtures

High-Performance Lighting Solutions

CARA SPECTRAL CHART

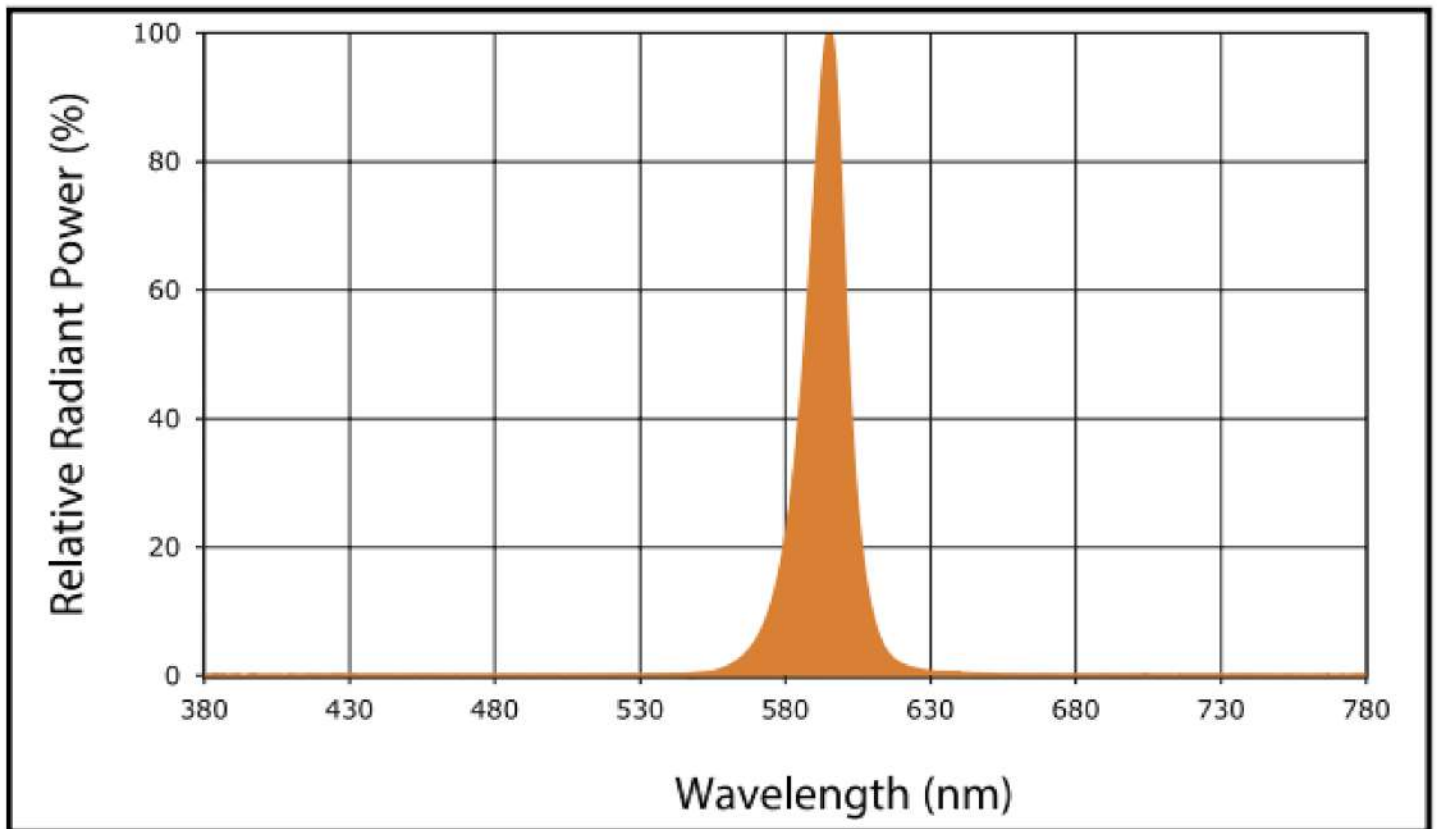

PH: 800-468-9925
Sales@AccessFixtures.com
AccessFixtures.com



AccessFixtures
High-Performance Lighting Solutions

Ordering Information

Example: AF33XKH15Q-F-1X37-U-4K-C-Z-SF

Model	Optics/Beam	Wattage	Driver	CCT	Lens	Color	Mounting
AF33XKH15Q	<p>C - Type III F - Type V I - Narrow Beam</p> <p>22 & 37w 5K model only</p>	<p>1x22 = 22w 1x37 37w</p> <p>OPTIMIZED 1x56=56w</p>	<p>U = 120-277v H=347-480v*</p> <p>*37w model only</p>	<p>3K=3000K* 4K=4000K ◆ 5K=5000K</p> <p>*37w F optic or 22w C&F optic models only</p> <p>◆ C&F optics only</p>	<p>C=Standard Clear Flat Glass Lens</p> <p>S=SoftLED Flat Glass Lens*</p> <p>*Type V Optic only</p>	<p>Z=Bronze C=Custom</p>	<p>SF=Slipfitter MA=Mounting arm adaptor Y=Yoke BR=Two Piece Swivel Bracket EH=Easy-hang wall bracket K=1/2" NPS knuckle NM=No Mount</p>

