

SPEC SHEET



OTAK

LED High Bays

AccessFixtures.com

1

Selectable Wattage:

Get the exact amount of light desired using Selectable 80, 125, or 180 wattage, and additional lighting control using the 0-10v dimmable driver

2

Selectable Kelvin:


Select the exact Kelvin you want for your location with the flick of a switch. Choose 3000K, 4000K, 5000K

3

Surge Protection:

OTAK comes standard with 10KV surge protection. LED lighting should never be on the same circuit with HID lighting or machinery, even equipped with surge protection.

highlights

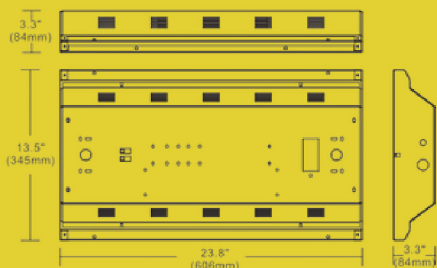

PH: 800-468-9925

Sales@AccessFixtures.com

AccessFixtures.com



AccessFixtures
High-Performance Lighting Solutions

OTAK FEATURES

System Watts	Selectable Wattage
Light Source	Alumnium boards
Kelvin	Selectable Kelvin
Available Finishes	White
Finish	Polyester powder white finish with a multi-stage process that produces 3ml thickness for superior corrosion and max environmental durability
Optic	Type V transparent lens or frosted lens
Listings	UC, CUL DLC
Product Family	OTAK
Voltage	120-277v
Warranty	5-Year Limited Warranty
Mounting Options	Cast-in Template for Mounting Directly Over a 4" Recessed Outlet Box, or Use ½" Surface Conduit.
Efficacy	Up to 155 LPW / 26,061 lumens