

SPEC
SHEET



HAWT

LED High Heat High Bay

AccessFixtures.com

1 EXTREME-LIFE:

L70 @ 100,000 hours at 80°C/176°F with attached LED driver and 100°C/212°F with a remote LED driver


2 Industrial Strength:

Field repairable and rated IP66 for wet location, IK10 impact resistance, and 3G or 5G for vibration

3 Custom Optics:

Photometric design service and 15 different optics available to get the light on the work surface where it is needed

highlights

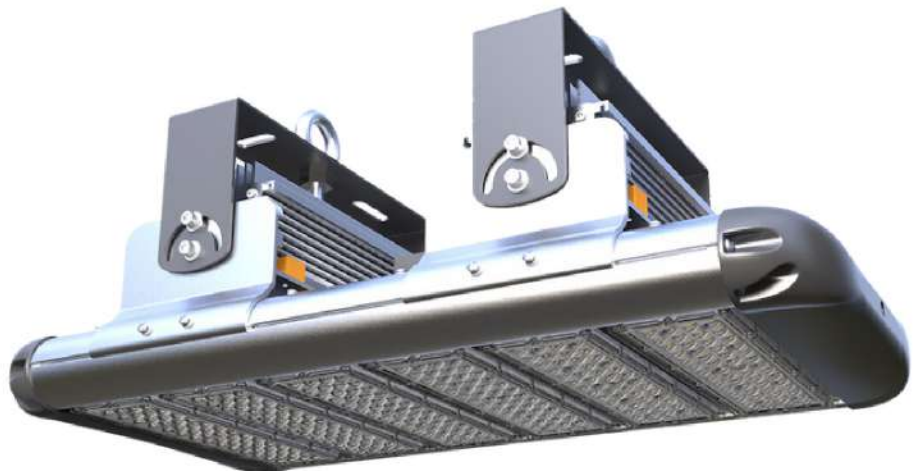

PH: 800-468-9925
Sales@AccessFixtures.com
AccessFixtures.com



AccessFixtures
High-Performance Lighting Solutions



HAWT FEATURES

Light Source	LED
Kelvin	2700K, 3000K, 3500K, 4000K, 5000K
Watts	50w, 100w, 150w, 200w, 300w, 450w
Available Finishes	Gray [RAL 7045]
Housing	Aluminum Alloy
CRI	70+
Lumens	Up to 58,500
LPW	Up to 140 LPW
Mounting	U Bracket, Hang Ring
Beam Angle	Type I, II, III, IV, V
Listings	ETL, DLC, CB, CE, RoHS
Product Family	HAWT
Voltage	100-277 VAC, 200-480 VAC
Warranty	5-year limited warranty





AccessFixtures

High-Performance Lighting Solutions

HAWT OPTIONS



OPTIONS

- Motion Sensor
- Photocell
- Powder cord length
- Beam Angle
- Voltage
- Kelvin temperature






DETECTION PATTERN

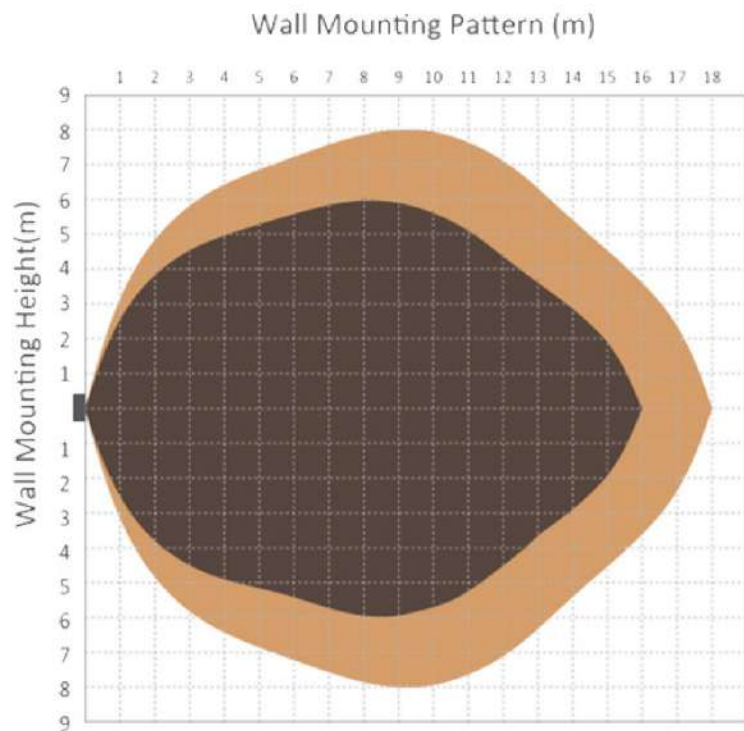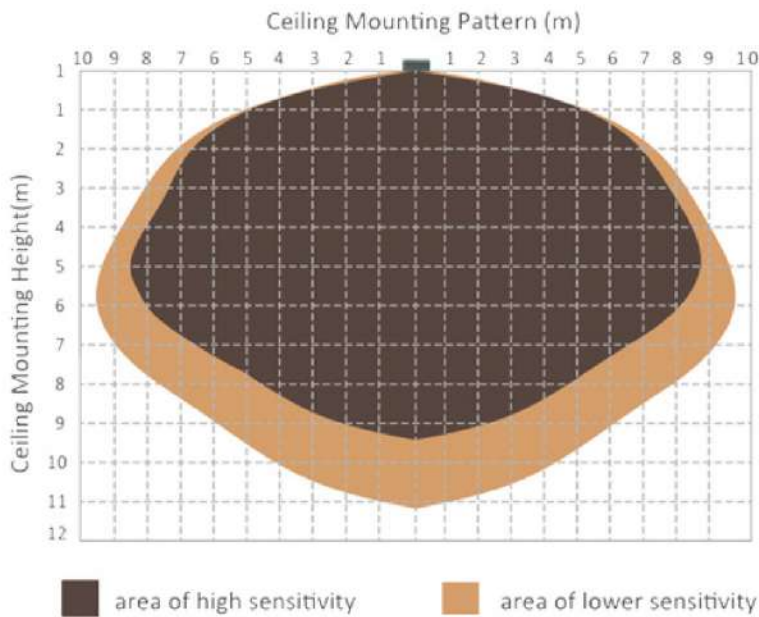




PHOTOMETRIC DATA

Rectangular Light Spot

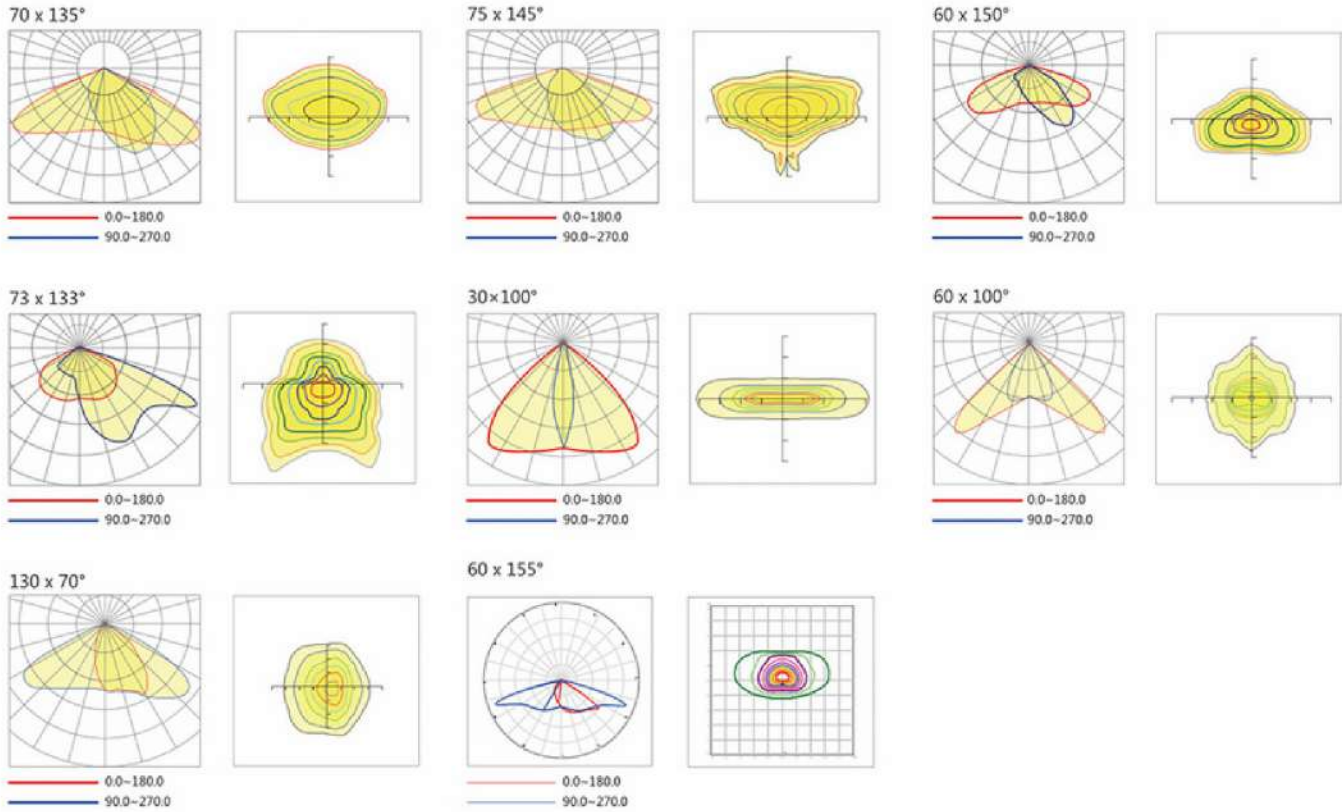

Round Light Spot

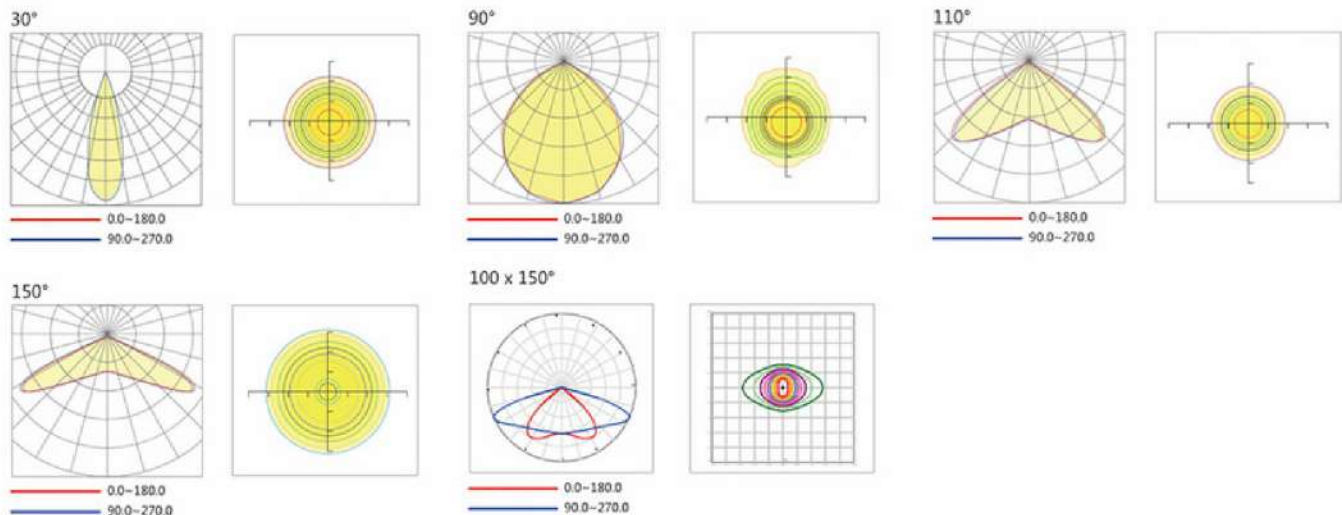

Ordering Information - Part 1


Example: AF33XPAD360-L-U-T3M-4000K-C-WH-MMS

Model	Voltage	Mounting	Optic	CCT	Color	Color	Options
AF33XPAD360	L =100-277VAC H =277-480VAC	U J	T2S T3S T3M T4VVS T4VS T4S T4M T5M T5W T10D T20D T40DH T60DH T90D	4000K	C =Clear UV-Stabilized Polycarbonate Vandal-Resistant Lens L = Opal UV-Stabilized Polycarbonate Vandal-Resistant Lens	GY Gray-RAL7004 BK Black-RAL9011 BZ Bronze-RAL8019 WH White-RAL9010	DIM1 =1-10v Dimming PWM =10V PWM Control DALI =Dali Control MMS =Motion Sensor PC3 =Photocell 3PIN PC7 =Photocell 7PIN PCM =Photocell MINI BLS =Back Light Shield BSP =Bird Spike ORL =Optics Rotated Left ORR =Optics Rotated Right



Ordering Information - Part 2

Example: AF33XPSSS-20411-Z-N-LBC

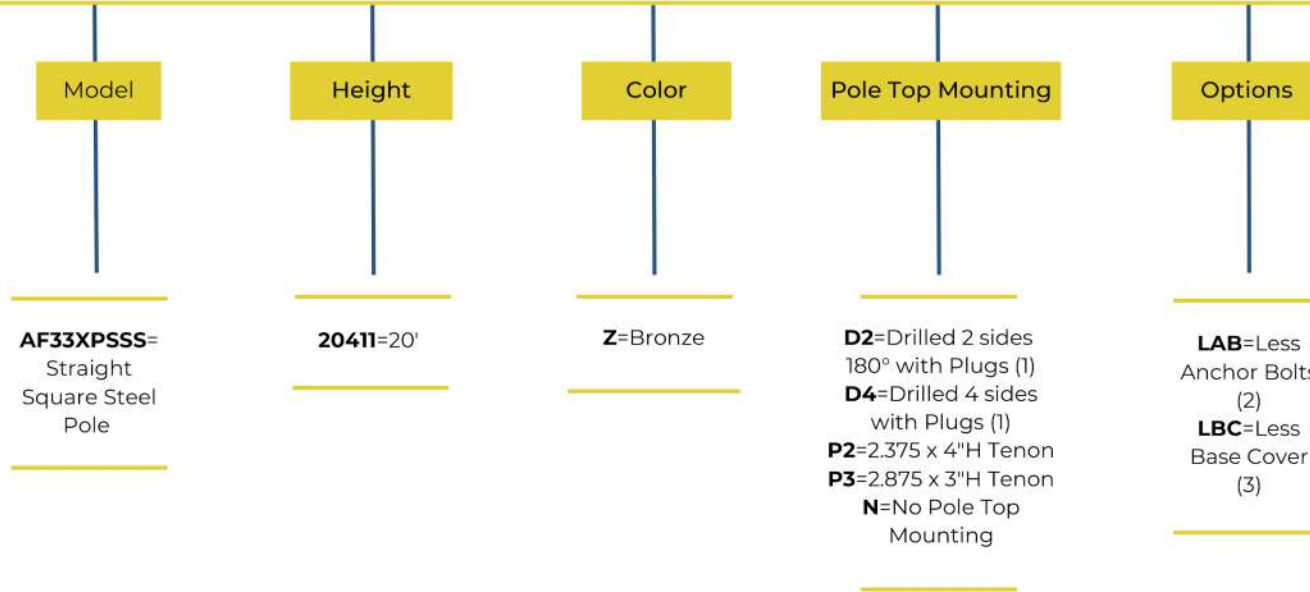

Example: AF33XPAD360-L-U-T3M-4000K-C-WH-MMS + AF33XPSSS20411ZN

