

SPEC SHEET

OTOK

LED High Bay

Selectable Kelvin 4000K, 45000K 5000K. Selectable Wattage: 80/125/180w

AccessFixtures.com




1 **Select Wattage:**
Get the exact amount of light desired using Selectable 80, 125, or 180 wattage, and additional lighting control using the 0-10v dimmable driver.

2 **Durable & Waterproof:**
Select the exact Kelvin you want for your location with the flick of a switch. Choose 4000 Kelvin, 4500 Kelvin, or 5000 Kelvin.

3 **Surge Protection:**
OTOK comes standard with surge protection. LED lighting should never be on the same circuit as HID lighting or machinery, even equipped with surge protection.

highlights

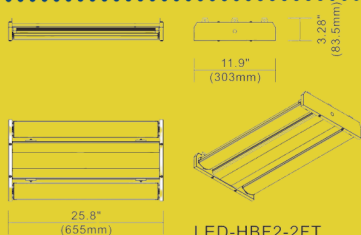

PH: 800-468-9925

Sales@AccessFixtures.com

AccessFixtures.com



AccessFixtures
High-Performance Lighting Solutions

OTOK FEATURES

Light Source	LED
Kelvin	Selectable Kelvin: 4000K, 4500K, 5000K
Watts	Selectable Wattage: 80, 125, 180w
Available Finishes	White
Housing	High-quality aluminum
Optics	Type V
Lumens	26,191
Efficacy	152 LPW
Lens	Diffuser
Dimensions	25.8" x 11.9" x 3.28"
Listings	CUL, DLC
Product Family	OTOK
Voltage	120-277v, 347-480v
Mounting	V-Hook, Pendant, Aircraft Cable
Warranty	5-year limited warranty



AccessFixtures

High-Performance Lighting Solutions

OTOK FEATURES

OPTIONS

- Selectable Kelvin
- Selectable Wattage
- Emergency Backup Battery
- 120-277v OCC sensor

