


SPEC SHEET

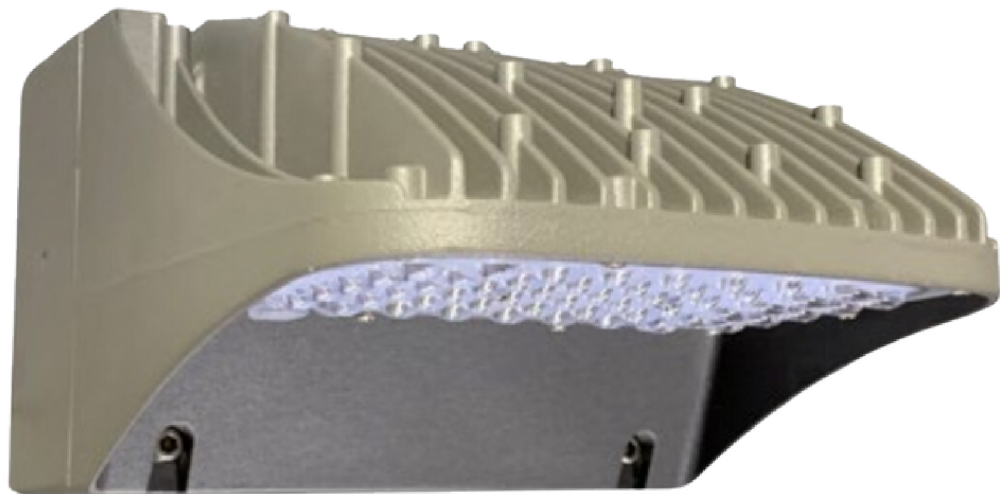

CUDL

LED Wall Pack - 19w, 28w, 42w, 84w

AccessFixtures.com

1 Full Cutoff:


The full cutoff design of this wall pack helps customers meet local lighting ordinances by minimizing up-light and light trespass.

2 EXTREME-LIFE:

The CUDL is L70 rated at 646,000 hours, making it ideal for hot climates, hard-to-reach places, and other locations where reliability and longevity matter.

3 Type 4 Optics:

Standard wide-angle type 4 optics maximize light distribution between wall packs and out across surface areas.



Dimensions

Width (A)	8 1/2" (220mm)
Length (B)	11" (280mm)
Height 2 (D)	5 1/2" (140mm)

PH: 800-468-9925

Sales@AccessFixtures.com

AccessFixtures.com



AccessFixtures

High-Performance Lighting Solutions



AccessFixtures

High-Performance Lighting Solutions

CUDL OPTIONS

Light Source	LED
Kelvin	3000K, 4000K, 5000K
Watts	19w, 28w, 42w, 84w
Available Finishes	Bronze, Custom RAL
Housing	Die Cast Hinged and Gasketed Aluminum Front Frame and Housing. Nickel-Plated Stainless Steel Hardware
Mounting	Mount Directly Over a 4" Recessed Outlet Box, Includes Easy-Hang "Two Hands Free" Wall Mounting Bracket with Built-In Level.
Lumens	Up to 9,278
LPW	Up to 122
Lens	Clear One-Piece Molded Type IV UV-Stabilized Polycarbonate Lens.
Driver	Electronic Driver, 120-277V, 50/60Hz
Dimensions	11" L x 8.75" W x 5.75" H
Listings	CSA, IP66, ANSI/UL
Voltage	120-277v, 347-480v
Photocell	Photocell Adaptable
Warranty	5-year limited warranty







CUDL OPTIONS

OPTIONS

- Choice of 3000K, 4000K or 5000K
- 120-277v or 347-480v
- Bronze, or custom RAL
- 120-277VAC 10KA Surge Suppressor
- Microwave Sensor with Dimming, 120-277V Only.
- 3-Pin Twist Lock Photocell Receptacle
- Battery Backup, 90 Minutes

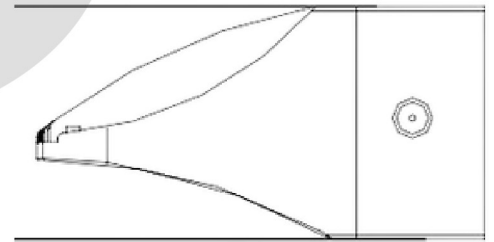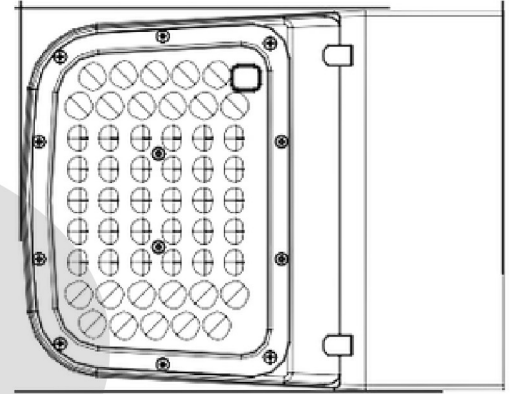




AccessFixtures

High-Performance Lighting Solutions

PHOTOMETRIC DATA

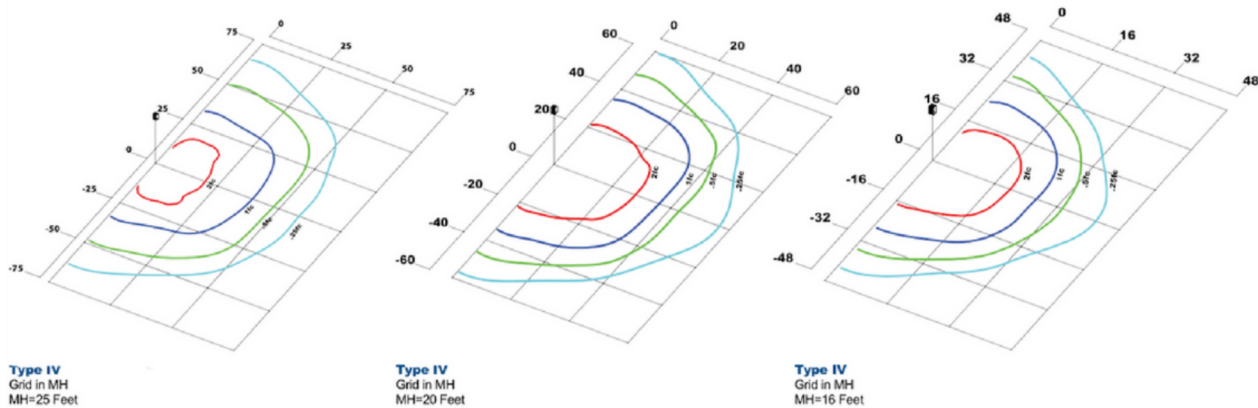

Input Watts	Optics	5000 CCT 80 CRI					4000 CCT 80 CRI					3000 CCT 80 CRI				
		Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
19	Type IV	2,326	120	1	0	1	2,140	112	1	0	1	2,151	111	1	0	1
28		3,424	122	1	1	1	3,151	113	1	1	1	3,167	113	1	1	1
42		4,604	110	1	1	1	4,459	106	1	1	1	4,259	101	1	1	1
84		9,278	110	2	1	2	9,166	109	2	1	2	8,582	102	2	1	2

