

SPEC SHEET



ATRI

LED Round & Square Wall Sconce

AccessFixtures.com

Even Lighting:

Mounted at 10', ATRI emits >1fc 23' Across and 12' Out. Mounted at 15' ATRI emits >1fc 23' Across and 12' Out; providing you with incredibly even light..



EXTREME-LIFE:

ATRI is EXTREME-LIFE L70 rated at 187,000 hours, making it virtually maintenance-free.

Optic Design:

Features a single downward-facing LED array at the top of the fixture, emitting 1,813 lumens in a medium beam spread – sending light exactly to where you need it.

highlights

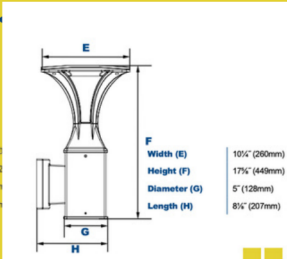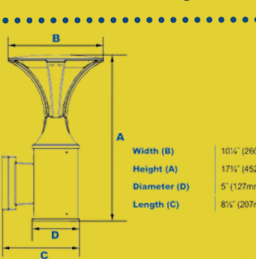

PH: 800-468-9925

Sales@AccessFixtures.com

AccessFixtures.com



AccessFixtures

High-Performance Lighting Solutions



AccessFixtures

High-Performance Lighting Solutions

ATRI FEATURES

Light Source	LED
Kelvin	3000K, 4000K, 5000K
Watts	18w, 27w
Available Finishes	Bronze, Black, Custom RAL
Housing	Die Cast Aluminum Housing
Mounting	Mount over a 4" Recessed Outlet Box. Easy-Hang Wall Bracket, Built-In Level.
Mounting Height	8-16 feet
Lumens	Up to 2,719
Lens	Clear UV-Stabilized Polycarbonate or Opal UV-Stabilized Polycarbonate Vandal-Resistant Lens
Driver	Electronic Driver, 120-277V, 50/60Hz
Listings	CSA, IP66, ANSI/UL
Voltage	120-277v
Model	Round or Square
Photocell	Photocell Adaptable
Warranty	5-year limited warranty

PH: 800-468-9925
Sales@AccessFixtures.com
AccessFixtures.com



AccessFixtures
High-Performance Lighting Solutions



AccessFixtures

High-Performance Lighting Solutions

ATRI

Optic	CCT	Delivered Lumens		Optic	CCT	Delivered Lumens	
		Round	Square			18w	27w
Round Sconce with Clear Glass Type V Optic	3000K	1,532	2,298	Square Sconce with Clear Glass Type V Optic	3000K	1,604	2,406
	4000K	1,662	2,493		4000K	1,740	2,610
	4000K	1,731	2,597		4000K	1,813	2,719
	BUG Rating	B1-U3-G1	B1-U3-G1		BUG Rating	B1-U2-G1	B1-U3-G1
Round Sconce with Opal Glass Type V Optic	3000K	1,343	2,014	Square Sconce with Opal Glass Type V Optic	3000K	1,406	2,109
	4000K	1,457	2,185		4000K	1,525	2,288
	4000K	1,517	2,276		4000K	1,589	2,383
	BUG Rating	B1-U2-G1	B1-U3-G1		BUG Rating	B1-U2-G1	B1-U3-G1






ATRI OPTIONS


OPTIONS

- 10KA or 20KA Surge Protection
- 90min Emergency battery backup
- Cold start battery backup
- Photocell


PHOTOMETRICS

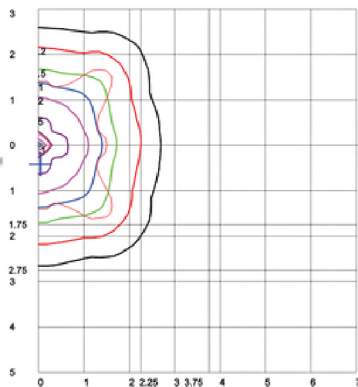


Distance in Units Of Mounting Height
Values Based On 10 Foot Mounting Height
1/2 Maximum Candela Trace Shown As Dashed Curve
(x) = Maximum Candela Point

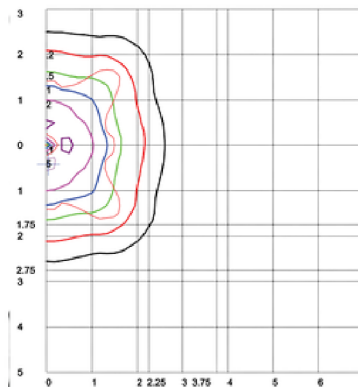

Distance in Units Of Mounting Height
Values Based On 10 Foot Mounting Height
1/2 Maximum Candela Trace Shown As Dashed Curve
(x) = Maximum Candela Point

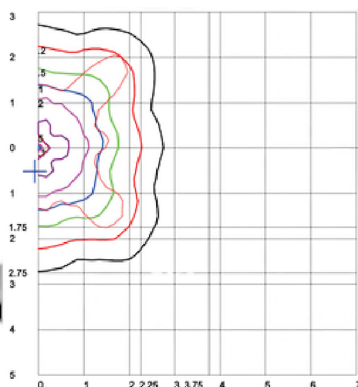

Distance in Units Of Mounting Height
Values Based On 10 Foot Mounting Height
1/2 Maximum Candela Trace Shown As Dashed Curve
(x) = Maximum Candela Point

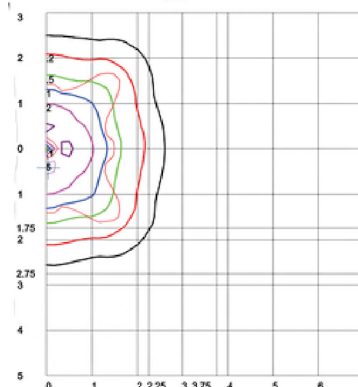

Distance in Units Of Mounting Height
Values Based On 10 Foot Mounting Height
1/2 Maximum Candela Trace Shown As Dashed Curve
(x) = Maximum Candela Point

