


SPEC SHEET

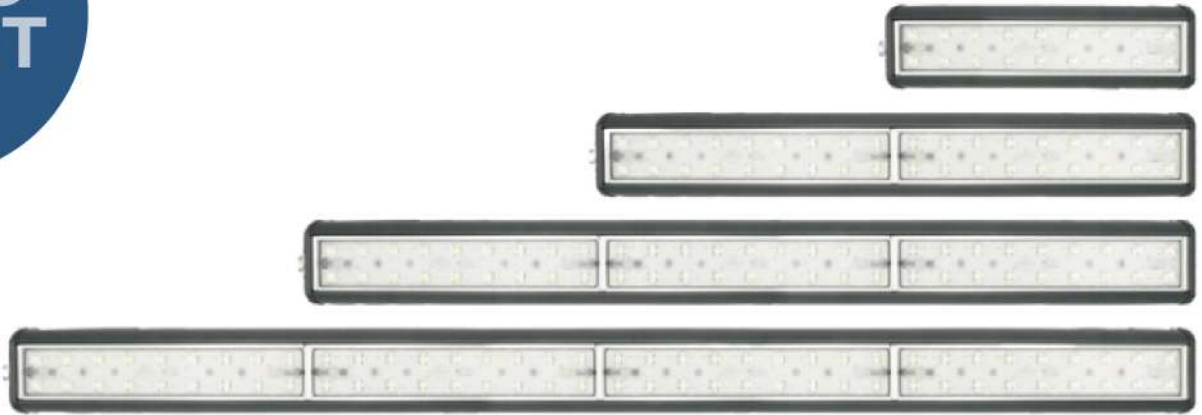

# TENNIS

Club-Level Indoor Tennis Court LED Lighting

AccessFixtures.com

## 1 EXTREME-LIFE:

EPTAs have an EXTREME-LIFE rating of L70 @ 200,000 hours for years of virtually maintenance-free performance.

## 2 Linear with a Curved Top:

Being linear and with a curved top, tennis balls will never get stuck on top of the light fixture.

## 3 Perfect Optics:

While the EPTAs in this lighting plan are mounted at the sides and ends of the court, the optics specified are diffuser optics, which means glare is minimized if not nonexistent.



PH: 800-468-9925  
Sales@AccessFixtures.com  
AccessFixtures.com



AccessFixtures  
High-Performance Lighting Solutions



## EPTA FIXTURE FEATURES

<b>Light Source</b>	LED
<b>Kelvin</b>	2200K, 3000K, 4000K, 5000K, 5700K
<b>Watts</b>	160w
<b>Available Finishes</b>	Black, Gray
<b>Finish</b>	Durable corrosion-resistant polyester powder-coat paint
<b>CRI</b>	70+ [Standard], Ra80/Ra90 [Optional]
<b>Light Source</b>	LED Array
<b>LPW</b>	Up to 160 LPW
<b>Mounting</b>	U mount (Bracket), T mount (arm), L mount (slip fitter)
<b>Beam Angle</b>	T15, T5M, T5W, T40D, T60D, T90D
<b>Listings</b>	DLC, IP66, IK08, CUL, CE, CB, SAA, TAA, RoHS compliant
<b>Product Family</b>	EPTA
<b>Voltage</b>	100-277 VAC, 347-480 VAC
<b>Warranty</b>	5-year limited warranty






# AccessFixtures

High-Performance Lighting Solutions

## EPTA FEATURES

### OPTIONS

- 2200K, 3000K, 4000K, 5000K, 590nm Amber
- Black, Gray
- Surface mount, suspension mount
- 1-10v dimming
- T1S, T5M, T5W, T40D, R60D, T90D optics
- Microwave motion sensor
- Photocell Mini
- Emergency power supply, back light shield, SAC safety cable, additional cable, spill control
- Ra80 or Ra90 optional

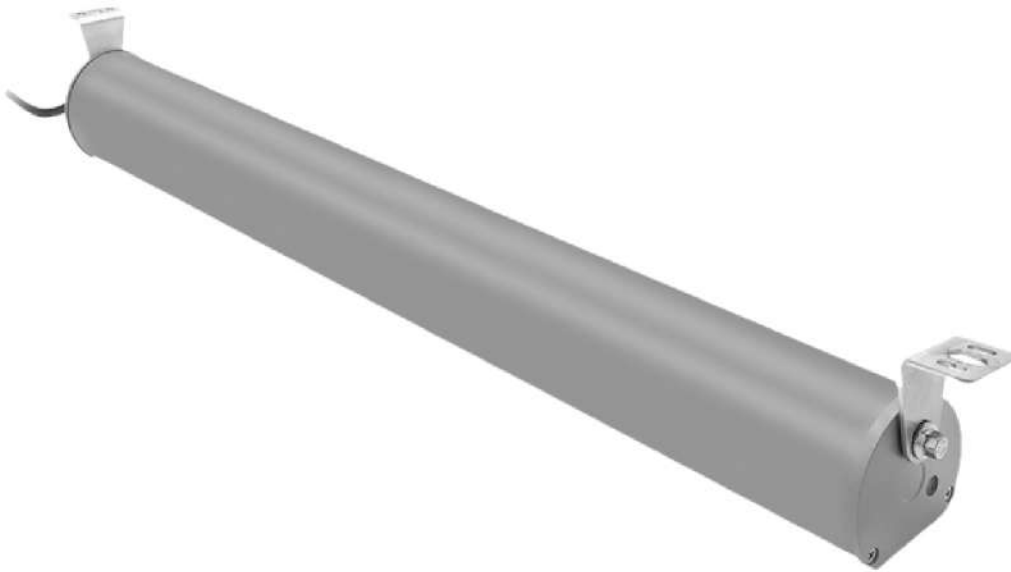

PH: 800-468-9925  
Sales@AccessFixtures.com  
AccessFixtures.com



**AccessFixtures**  
High-Performance Lighting Solutions







# AccessFixtures

High-Performance Lighting Solutions


## EPTA LED LINEAR LIGHTING PHOTOMETRY

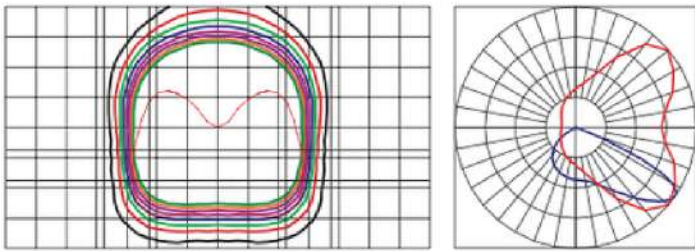


**T3S** Type III Short

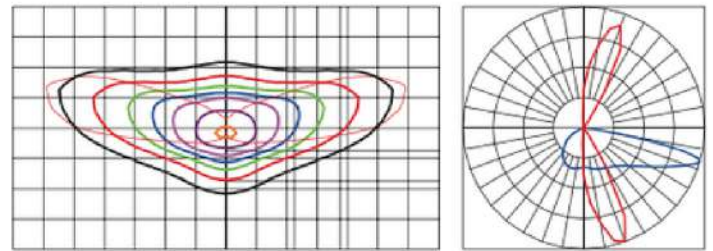


**T3M** Type III Medium

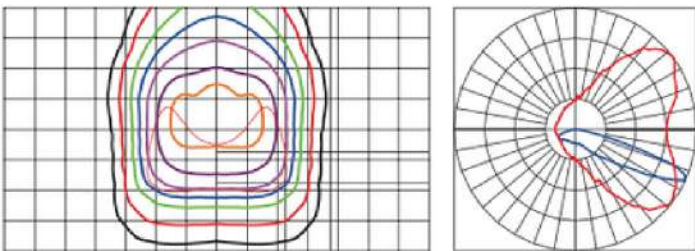


**T4S** Type IV Short

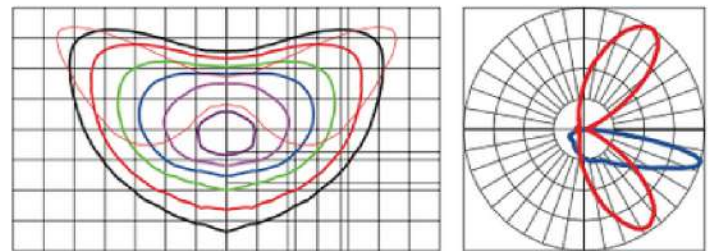


**T4M** Type IV Medium

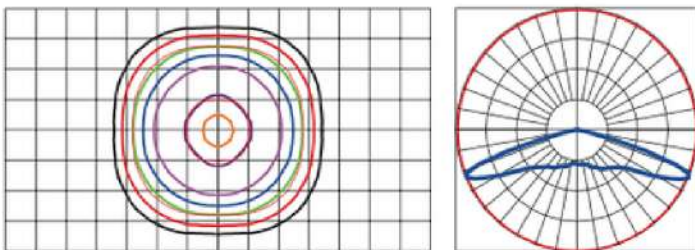


**T5W** Type V Square Wide

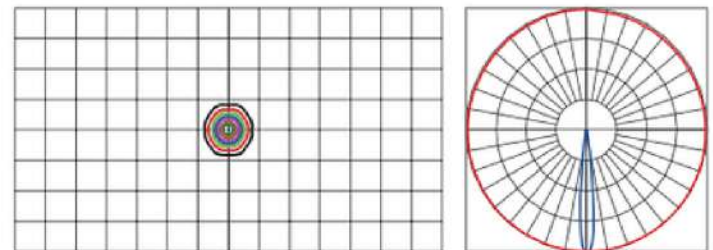

**T10D** 10° Flood

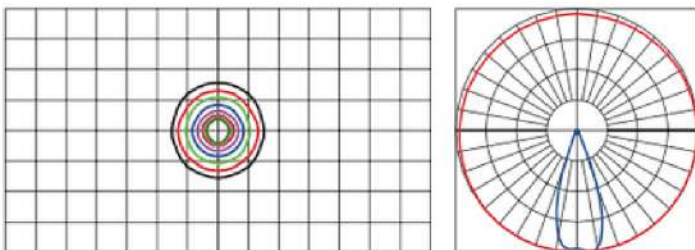


**T40D** 40° Flood

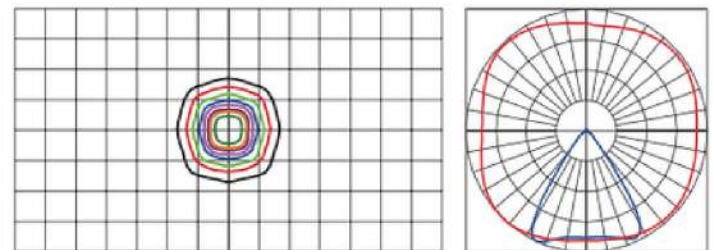



**T60D** 60° Flood





## EPTA LED LINEAR LIGHTING PHOTOMETRY

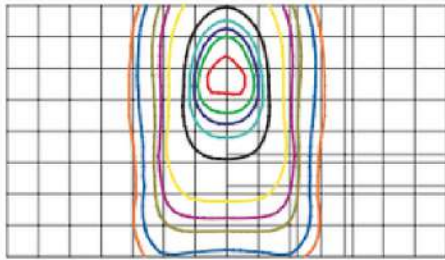



**T4VS** Type IV Very Short

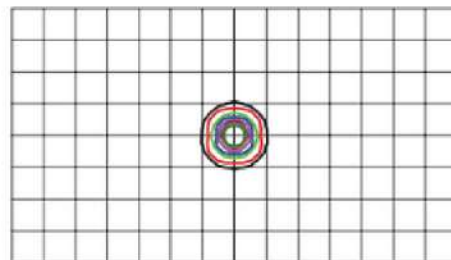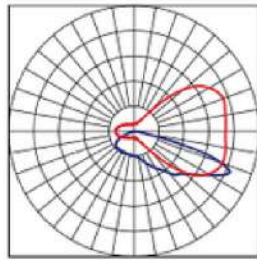



**T20D** 20° Flood

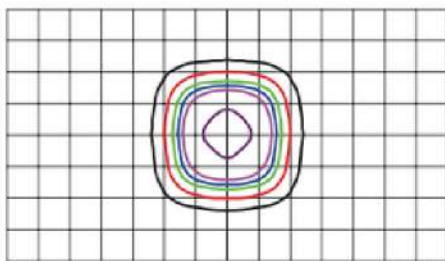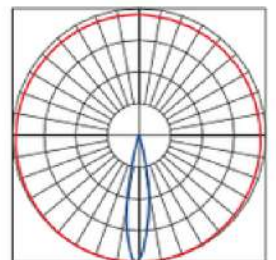


**T5M** Type V Square Medium

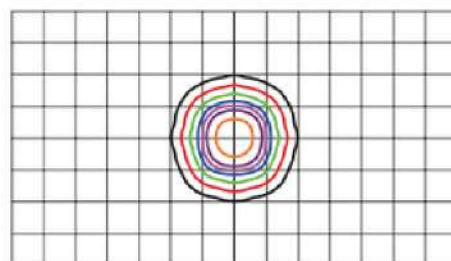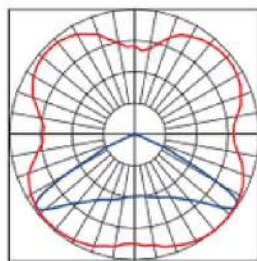


**T90D** 90° Flood

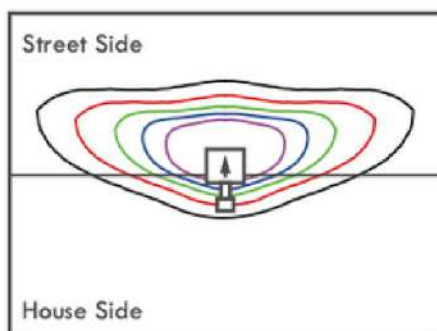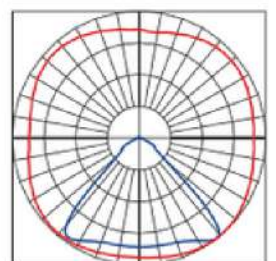

Standard

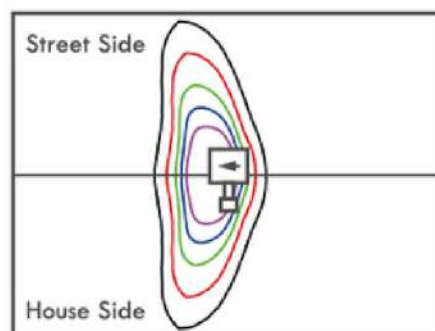

Optics Rotated Left @ 90°

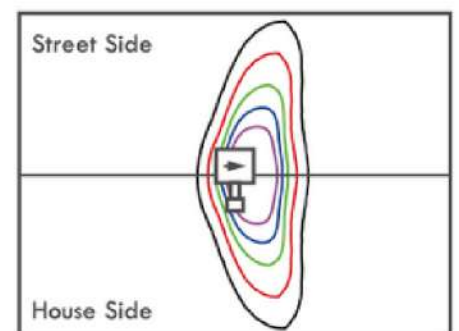


Optics Rotated Right @ 90°






## EPTA LED LINEAR LIGHTING OPTICAL DISTRIBUTIONS


Type III Short




Type III Short  
Spill Control




Type III  
Medium




Type III Medium  
Spill Control

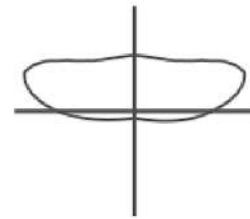


Type IV  
Very Short




Type IV Very  
Short Spill Control

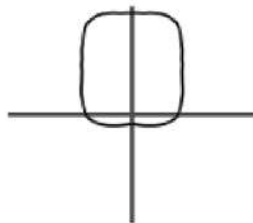


Type IV Short

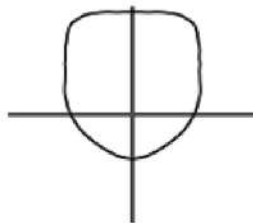


Type IV Short  
Spill Control

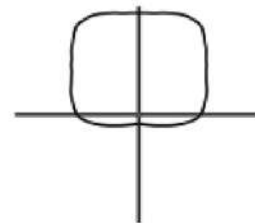


Type IV  
Medium




Type IV Medium  
Spill Control




10° Flood




20° Flood




40° Flood




60° Flood

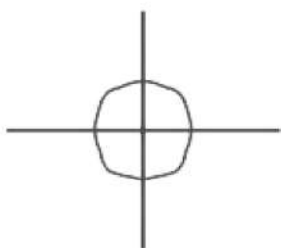

90° Flood

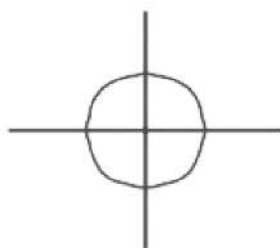

Type V Square  
Medium

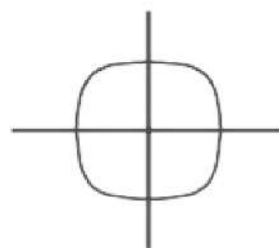

Type V Square  
Wide

