

**SPEC  
SHEET**



# PICKLEBALL

Twin Court LED Lighting

[AccessFixtures.com](http://AccessFixtures.com)

## **EXTREME-LIFE:**

1 Exceptional heat sink design produces an EXTREME-LIFE rating of L70 @ 200,000 hours for years of virtually maintenance free performance.

## **Super Efficient:**

2 With 480w watts per light fixture and lumens per watt of up to 140, APTAs can provide up to 68,000 lumens from just one light fixture, delivering outstanding value and efficiency.

## **Maximum Value**

3 Using only four poles and four fixtures, this pickle ball twin-court LED lighting package provides excellent quality, IP66 and IK10 ratings for impact resistance to withstand extreme weather conditions at competitive pricing; allowing you to illuminate your pickleball court and save money!



PH: 800-468-9925

[Sales@AccessFixtures.com](mailto:Sales@AccessFixtures.com)

[AccessFixtures.com](http://AccessFixtures.com)



**AccessFixtures**

High-Performance Lighting Solutions



# AccessFixtures

High-Performance Lighting Solutions

## APTA FIXTURE FEATURES

<b>Light Source</b>	LED
<b>Kelvin</b>	3000K
<b>Watts</b>	480w
<b>Available Finishes</b>	Bronze, Black, Grey, White, Green
<b>Housing</b>	High-grade aluminum
<b>CRI</b>	70+
<b>Lumens</b>	Up to 67,200 lumens
<b>LPW</b>	Up to 140 LPW
<b>Mounting</b>	U mount (Bracket), T mount (arm), L mount (slip fitter)
<b>Beam Angle</b>	T4VS optics
<b>Listings</b>	DLC, IP66 rated, IK10 rated, CUL, CE, CB, SAA, ENEC, TUV rated
<b>Product Family</b>	APTA
<b>Voltage</b>	100-277 VAC, 347-480 VAC
<b>Warranty</b>	5-year limited warranty





## POLE FEATURES

<b>Specifications</b>	Conforms to ASTM-A 500 Grade B: Minimum yield strength of 46,000 PSI
<b>Finish</b>	Textured architectural powdercoat finish
<b>Taper Rate</b>	0.14"/FT
<b>Anchor Bolt Size</b>	M20 x 27.5"
<b>Material</b>	High strength steel
<b>Base cover</b>	Poles are provided with a two-piece formed steel base cover that is easily assembled and fitted over pole base
<b>Pole Length</b>	20'
<b>Mounting</b>	Standard Length Poles Include $2\frac{3}{8}$ " OD Tenon, Side Drilled 4 @ 90 Degrees, UV- Stabilized Polycarbonate Top Cover and Hole Plugs for Unused Drilling Locations
<b>Warranty</b>	5-year limited warranty





# AccessFixtures

High-Performance Lighting Solutions




## APTA FEATURES



### OPTIONS

- 1-10v dimming
- 10v PWM control
- DALI control/DMX control
- Microwave motion sensor
- Photocell
- Emergency power supply, back light shield, SAC safety cable, additional cable, spill control
- 3/4 Baffle
- Ra80 or Ra90 optional
- Bird spikes

## APTA FIXTURE PHOTOMETRICS

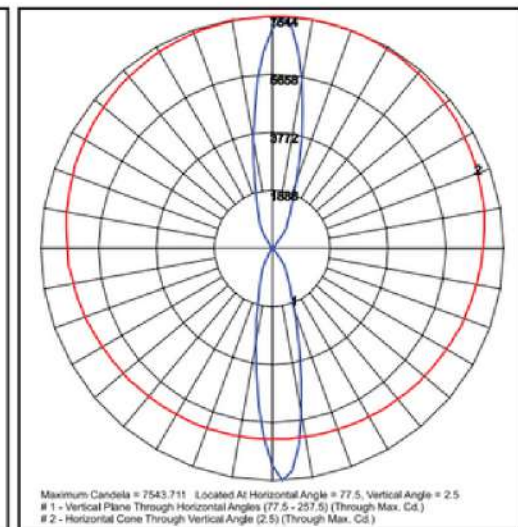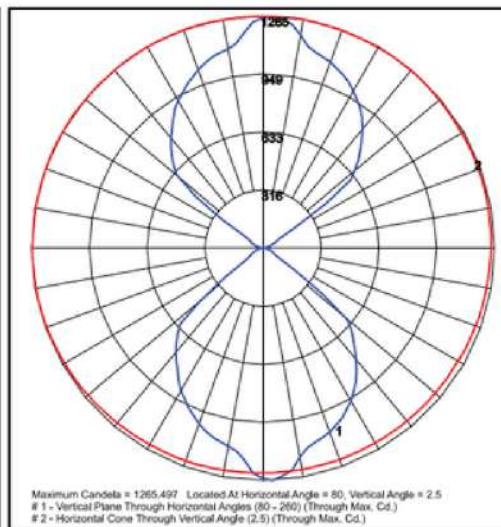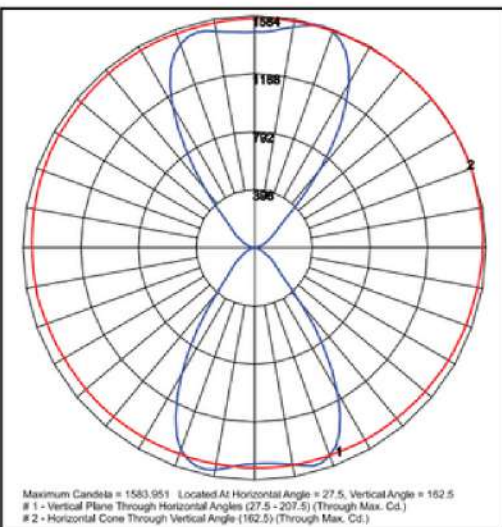

70° Up / 70° Down Optic

100° Up / 100° Down Optic

30° Up / 30° Down Optic

