


CONO 26 Round Reflector Bollard Light

- LEDs mounted facing down and reflector deliver light where it is needed and wanted
- Frosted polycarbonate lens reduces/eliminates glare
- LEDs and optics distribute over 1 footcandle in a X' diameter

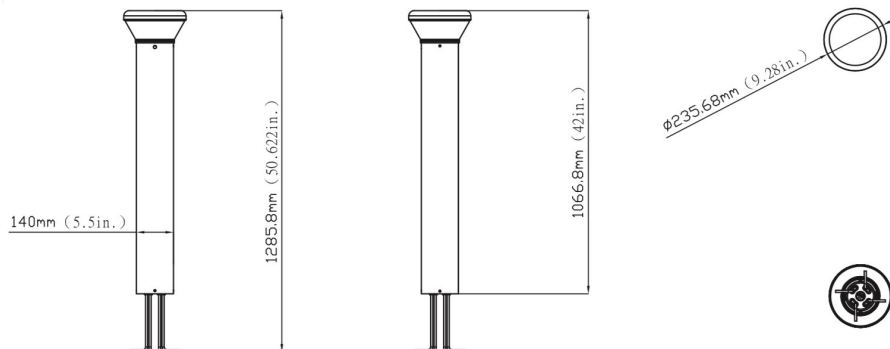

CONO 26 Round Reflector Bollard Light

Specifications

Watts	26 watts
Voltage	120-277v
Lumens	3000lm
Lumens/Watt.	115lm/w
Color Rendering	80+ CRI
CCT	4000 Kelvin
Driver Current	670mA
Dimmable	1-10v dimming
LED Life.	L70 @ 50,000 hours
Operating Temp.	-40°F to 113°F