

SKYE Multi Watt - Multi Kelvin Strip Light



- Field adjustable wattage
- Field adjustable Kelvin
- Wired lens for safe cleaning

SPECIFICATION FEATURES



Mounting
Surface or pendant mounting with aircraft cable option

Applications
Ideal solution for warehouses, offices, retail, etc.

Construction
Durable, matte white 22 gauge metal housing with smooth PMMA cover lens

Certification
UL listed. All components have UL certification. Protection Grade IP20

Warranty
7 years on Parts / 5 years on Labor



Input Voltage	120V-277V
Rated Wattage	Multi-watt
Available CCT	Multi-CCT
Efficacy	135 LWP
CRI	>80
Color Consistency	5-step MacAdam Ellipse
Ambient Temp	-20°C to 50°C
Power Factor	> 0.92
Dimming	0-10V
Surge Protection	2KV
Lifetimes	100,000 hours

ORDERING OPTIONS

Example: **AF66X2SLED4/U/MW34-MCCT-EM-MS**

SERIES	FORM FACTOR	WATTAGE	COLOR TEMP	BACKUP	CONTROLS
AF66.XG2SLED	4/U/	MW34	-MCCT	-EM	-MS
	4 4'	4' MW44 22/28/36/44W	MCCT 3500K/4000K/5000K	[Blank] None EM Emergency Battery Backup	[Blank] None MS Motion Sensor



AF66XG2SLED4/U/MW44-MCCT

CATALOG NUMBER	RATED WATTAGE	EFFICACIES	DELIVERED LUMENS
AF66XG2SLED4/U/MW44-MCCT	22W, 28W, 36W, 44W (default)	130	5724 (35K)
		131	5764 (40K)
		132	5808 (50K)




ZONAL LUMENS SUMMARY

Zone	Lumens	% Lamp	% Luminaire
0-30	1,421.8	24.8	24.8
30-40	2,318.2	40.5	40.5
40-60	4,116.8	71.9	71.9
60-90	1,611.1	28.1	28.1
0-90	5,727.9	100.0	100.0

LUMENS PER ZONE

Zone	Lumens	% Total
0-10	175.7	3.1
10-20	496.7	8.7
20-30	749.4	13.1
30-40	896.4	15.6
40-50	930.8	16.2
50-60	867.9	15.2
60-70	724.8	12.7
70-80	534.9	9.3
80-90	351.4	6.1

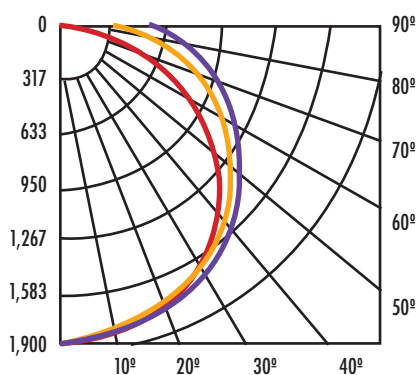

FLOOD SUMMARY

	Efficiency %	Lumens	Horiz. Spread	Vert. Spread
Field (10%)	99.4	5,692.7	156.7	90.0
Beam (50%)	67.4	3,858.5	100.9	126.0
Total	100.0	5,726.4		

■ 0°H
 ■ 90°H
 ■ 45°H