

## ZILO 50w Forward Throw Wall Pack



### KEY BENEFITS

The Access Fixtures ZILO 50w wall pack is ideal for building-mounted doorway and pathway illumination. The integrated LEDs mean you never have to change a bulb. The die-cast aluminum housing alongside the super durable powder coat finish provide an impact, corrosion, and weather resistant fixture. The integrated LEDs last for 50,000 hours, so you never have to buy a bulb for the light, if activated, the photo-cell feature turns the light on at dusk and off at dawn for convenience and energy savings.

### CERTIFICATIONS

- DLC 4.1 Premium • cUL-us Listed • Lighting Facts •

\* Please refer to the DLC QPL website for the latest and most complete information at [www.designlights.org/QPL](http://www.designlights.org/QPL)

### PRODUCT PERFORMANCE


| SYSTEM WATTAGE | LED WATTAGE | LUMENS  | LP/W     | CRI | REPLACES (MH) |
|----------------|-------------|---------|----------|-----|---------------|
| 50W            | 45W         | 4837 lm | 118 lm/w | ≥80 | 150W          |

### PRODUCT SUMMARY

|                              |  |
|------------------------------|--|
| EFFICACY                     | 118 lm/w   |
| LED CHIP                     | Philips®   |
| CCT                          | 4000K  |
| DRIVER                       | Dimmable LED power supplies, Current can be adjusted the 120-277V Dimming type is continuous, The product can dim to 10% |
| DRIVER EFFICIENCY            | >85%   |
| INDIVIDUAL CARTON DIMENSIONS | 14 x 9 x 9 in  |
| INDIVIDUAL CARTON WEIGHT     | 12 lbs   |
| STANDARD LIFETIME            | Design minimum 50,000 + L70 Hours  |
| STANDARD WARRANTY            | 5 Years  |
| WATER PROOFING GRADE         | Wet Location   |

### PRODUCT WEIGHT: 12 lbs

### PRODUCT DIMENSIONS

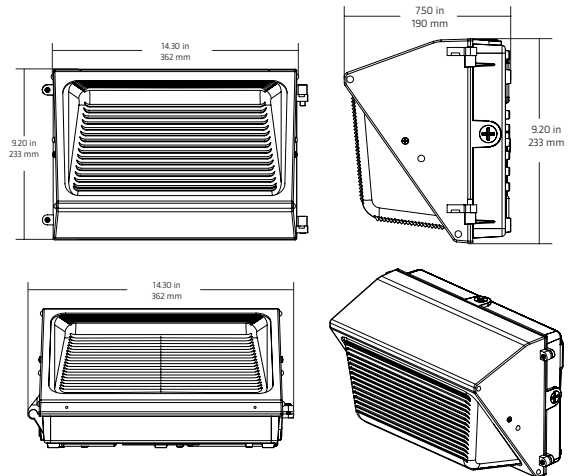

### PRODUCT PHOTOMETRIC

