


Area Light Series

23" Area Light with Wide Angle Reflector

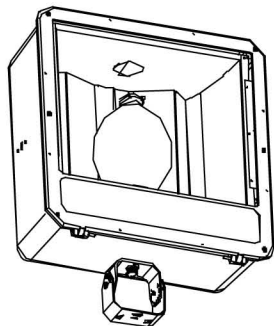

FL90W

Housing:

Die Cast Aluminum Housing & Hinged Top Frame, Safety Cable Restraint, 1/2" Coin Plugs with O-rings for Conduit & Photocell, Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating

Reflector:

Aluminum Wide Angle Reflector

Lens:

Tempered Flat Clear Glass Lens

Socket:

Porcelain 5KV Pulse Rated Mogul Base with Nickel Plated Screw Shell

Mounting:

Mount with Two-Piece Swivel Bracket, Adjustable Slipfitter, 6" Extruded Mounting Arm, Yoke, or Direct Pole Mount Arm

Wattage:

High Pressure Sodium: 400 to 1000w

Metal Halide: 400 to 1000w

Pulse Start: 750 to 1000w

Listings & Ratings:

CSA: Listed for Wet Locations


Access Fixtures

Kit(s)				
Catalog #	Description			
FL90W	23" Area Light with Half-Open Frame & Wide Angle Reflector			
Complete Units (Lamps Included)				
Catalog #	Wattage	Voltage	Lamp	Ballast
FL90WH400QL **	400	Quad	HPS	CWA
FL90WH1000QL **	1000	Quad	HPS	CWA
FL90WH1000480L **	1000	480	HPS	CWA
FL90WM400QL **	400	Quad	MH	CWA
FL90WM1000QL **	1000	Quad	MH	CWA
FL90WP750QL **	750	Quad	PS	CWA
FL90WP825QL **	825	Quad	PS	CWA
FL90WP1000QL **	1000	Quad	PS	CWA

** Specify Mounting: BR=Bracket Mount, SF=Slipfitter Mount

Add: PC1 120V Photocell (Field Installed)
PC2 208-277V Photocell (Field Installed)
Other Wattages & Custom Colors Available Upon Request.

Dimensions

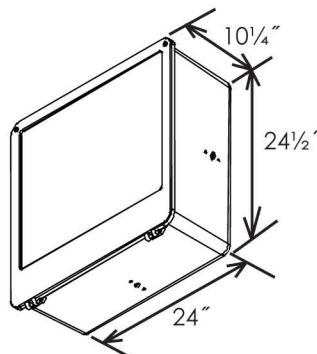

FL90W

Access Fixtures
40 Jackson Street
Worcester, MA 01608
888-521-2582
sales@accessfixtures.com
www.AccessFixtures.com

Access Fixtures

Catalog #	Description
FL90GS	Glare Shield, Aluminum, Bronze Powdercoat Finish
FL90LG	Clear Polycarbonate Vandal Resistant Guard
FL90WG	Wire Guard, Stainless Steel Construction
FL90BR	Two-Piece Swivel Bracket, Stamped, Bronze Finish
FL90SFX	External Mount Slipfitter, Die Cast with Hardware & Angle Indicator, Coin Plug
FLAM	Heavy Duty Adjustable Direct Mount Pole Arm, Bronze Finish, Angle Indicators & Hardware
FLEM6*	6" Aluminum Extruded Mounting Arm, Bronze, Gasket & Hardware
FL90Y	Yoke, Stamped Heavy Duty Steel, Textured Bronze Finish
CPSC	3' Steel Cable with Clear Vinyl Coating, Steel Eye & Loop Ends

* Specify Mounting: Straight Arms: S=Square Pole, R=Round Pole

Area Light Series

23" Area Light with Wide Angle Reflector



FL90GS
(Shown Mounted)



FL90LG



FL90WG
(Shown Mounted)



FL90BR



FL90SFX
(Shown Mounted)



FLAM



FLEM6




FL90Y



CPSC

Photometrics

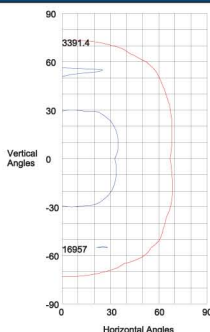

Maximum Candela = 3391.4
 Located At Horizontal Angle = 22.5, Vertical Angle = 13
 50% Maximum Candela = 1695.7
 10% Maximum Candela = 3391.4

FL90WM1000

Access Fixtures
 40 Jackson Street
 Worcester, MA 01608
 888-521-2582
sales@accessfixtures.com
www.AccessFixtures.com